PCB terminal block - PTSM 0,5/ 4-2,5-V SMD R44 - 1771114

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)

PC terminal block, Nominal current: 6 A, Nom. voltage: 160 V, Pitch: 2.5 mm, Number of positions: 4, Connection method: Spring-cage conn., Mounting: SMD/THT/THR, Conductor/PCB connection direction: 90 °, Color: black

Product description

PC terminal block, Nominal current: 6 A, Nom. voltage: 160 V, Pitch: 2.5 mm, Number of positions: 4, Connection method: Spring-cage conn., Mounting: SMD/THT/THR, Conductor/PCB connection direction: 90 °, Color: black

Why buy this product

- Compact low-profile SMD PCB terminal block with 2.5 mm pitch
- High current carrying capacity for high power transmission
- Supplied in tape-on-reel packing according to IEC 60286-3 for automated mounting
- Rugged solder anchor for secure, mechanical fixing to the surface
- Specifically designed for use in dedicated SMT processes
- Spring-cage connection with direct plug-in technology with a release mechanism

Key commercial data

Packing unit	0
Minimum order quantity	400
Catalog page	Page 53 (CC-2011)
GTIN	4 046356 460149
Weight per Piece (excluding packing)	2.22 GRM
Country of origin	GERMANY

Technical data

Dimensions / positions

Length	5 mm
Pitch	2.5 mm
Dimension a	7.5 mm
Number of positions	4
Pin spacing	2.5 mm

Technical data

Range of articles	PTSM 0,5/..-V-SMD

PCB terminal block - PTSM 0,5/ 4-2,5-V SMD R44 - 1771114

Technical data

Technical data

Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	32 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	160 V
Connection in acc. with standard	EN-VDE
Nominal current IN	6 A
Nominal cross section	0.5 mm²
Maximum load current	6 A
Insulating material	LCP
Inflammability class according to UL 94	V0
Stripping length	6 mm
Nominal voltage, UL/CUL Use Group B	150 V
Nominal current, UL/CUL Use Group B	5 A

Connection data

Conductor cross section solid min.	0.14 mm²
Conductor cross section solid max.	0.5 mm²
Conductor cross section stranded min.	0.2 mm²
Conductor cross section stranded max.	0.5 mm²
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm²
Conductor cross section stranded, with ferrule without plastic sleeve max.	0.5 mm²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	20
Minimum AWG according to UL/CUL	26
Maximum AWG according to UL/CUL	20

Classifications

eclass

eClass 4.0	27141109
eClass 4.1	27141109
eClass 5.0	27141190
eClass 5.1	27141190
eClass 6.0	27261101

etim

ETIM 3.0	EC001121
ETIM 4.0	EC002643

PCB terminal block - PTSM 0,5/ 4-2,5-V SMD R44 - 1771114

Classifications

unspsc

UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432
UNSPSC 11	39121432
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432

Approvals

Certificates

Certification

UL Recognized / cUL Recognized / GOST / cULus Recognized

Certification EX

Certification submitted

Approval details

UL Recognized		
		B
mm²/AWG/kcmil	26-20	
Nominal current IN	6 A	
Nominal voltage UN	150 V	

cUL Recognized		
		B
mm²/AWG/kcmil	26-20	
Nominal current IN	6 A	
Nominal voltage UN	150 V	

GOST

cULus Recognized

Accessories

Accessories

Tools

PCB terminal block - PTSM 0,5/ 4-2,5-V SMD R44 - 1771114

Accessories

Screwdriver - SZS 0,4X2,0 - 1205202

Micro screwdriver, bladed, size: 0.4 x 2.0 x 60 mm, 2-component grip, with non-slip grip and twist cap

Drawings

Drilling diagram



Diagram

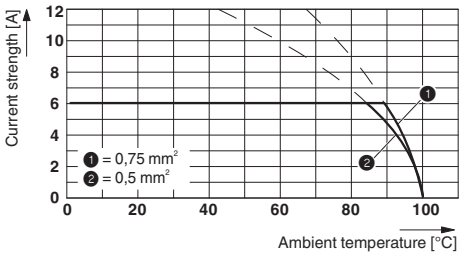

Dimension M: 13.4 mm

Dimensioned drawing

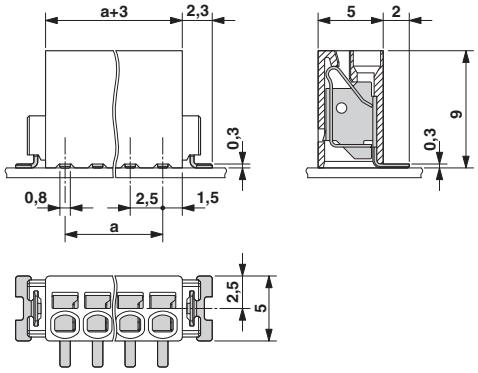

Dimensioned drawing