

RISC-V Processor Trace
Version 0.034-DRAFT
d56aea0645121c2030f5b0ef97160275a375a42b

Gajinder Panesar, Iain Robertson
<gajinder.panesar@ultrasoc.com>, <iain.robertson@ultrasoc.com>

UltraSoC Technologies Ltd.

January 7, 2020

Contents

1	Introduction	1
1.1	Terminology	2
1.2	Nomenclature	3
2	Branch Trace	5
2.1	Instruction delta trace concepts	6
2.1.1	Sequential instructions	6
2.1.2	Uninferable PC discontinuities	6
2.1.3	Branches	6
2.1.4	Interrupts and exceptions	6
2.1.5	Synchronization	7
2.1.6	End of trace	7
2.2	Optional and run-time configurable modes	7
2.2.1	Delta address mode	8
2.2.2	Full address mode	8
2.2.3	Implicit exception mode	9
2.2.4	Sequentially inferable jump mode	9
2.2.5	Implicit return mode	9
2.2.6	Branch prediction mode	10
2.2.7	Jump target cache mode	11
3	Hart to encoder interface	13

3.1	Interface requirements	13
3.1.1	Jump classification and target inference	15
3.1.2	Relationship between RISC-V core and the encoder	16
3.2	Instruction interface	16
3.2.1	Simplifications for single-retirement	20
3.2.2	Alternative multiple-retirement interface configurations	20
3.2.3	Optional sideband signals	20
3.2.4	Using trigger outputs from the Debug Module	22
3.2.5	Example retirement sequences	22
4	Filtering	23
5	Trace Encoder Output Packets	25
5.1	Format 3 packets	27
5.2	Format 3 subformat 0 - Synchronisation	27
5.2.1	Format 3 branch field	27
5.3	Format 3 subformat 1 - Exception	28
5.3.1	Format 3 tvalepc field	28
5.4	Format 3 subformat 2 - Context	28
5.5	Format 3 subformat 3 - Support	29
5.5.1	Format 3 subformat 3 qual_status field	29
5.6	Format 2 packets	31
5.6.1	Format 2 notify field	31
5.6.2	Format 2 notify and updiscon fields	32
5.6.3	Format 2 irfail and irdepth fields	33
5.7	Format 1 packets	34
5.7.1	Format 1 updiscon field	34
5.7.2	Format 1 branch_map field	34
5.7.3	Format 1 irfail and irdepth fields	34

5.8	Format 0 packets	36
5.8.1	Format 0 subformat field	36
5.8.2	Format 0 branch_fmt field	37
5.8.3	Format 0 irfail and irdepth fields	37
6	Reference Algorithm	41
6.1	Format selection	42
6.2	Resynchronisation	44
6.3	Multiple retirement considerations	45
7	Parameters and Discovery	47
7.1	Discovery of encoder parameters	49
7.2	Example ipxact description	50
8	Future Directions	55
8.1	Data trace	55
8.2	Fast profiling	55
8.3	Inter-instruction cycle counts	55
8.4	Transport	56
9	Decoder	57
9.1	Decoder pseudo code	57
10	Example code and packets	65

List of Figures

5.1	Example encapsulated packet format	25
6.1	Instruction delta trace algorithm	43

List of Tables

3.1	Instruction interface signals	18
3.2	Instruction interface signals - multiple retirement per block	19
3.3	Instruction interface signals - single retirement per block	19
3.4	Context type ctype values and corresponding actions	19
3.5	Optional sideband encoder input signals	21
3.6	Optional sideband encoder output signals	21
3.7	Debug Module trigger support (<i>mcontrol action</i>)	22
3.8	Example 1 : 9 Instructions retired over four cycles, 2 branches	22
5.1	Packet format 3, subformat 0	27
5.2	Packet format 3, subformat 1	28
5.3	Packet format 3, subformat 2	29
5.4	Packet format 3, subformat 3	30
5.5	Packet format 2	31
5.6	Packet format 1 - address, branch map	35
5.7	Packet format 1 - no address, branch map	36
5.8	Packet format 0, subformat 0 - no address, branch count	37
5.9	Packet format 0, subformat 0 - address, branch count	38
5.10	Packet format 0, subformat 1 - jump target index, branch map	39
5.11	Packet format 0, subformat 1 - jump target index, no branch map	40
7.1	Parameters to the encoder	48

7.2	Required attributes	49
7.3	Optional filtering attributes	49
7.4	Other recommended attributes	50

Chapter 1

Introduction

In complex systems understanding program behavior is not easy. Unsurprisingly in such systems, software sometimes does not behave as expected. This may be due to a number of factors, for example, interactions with other cores, software, peripherals, realtime events, poor implementations or some combination of all of the above.

It is not always possible to use a debugger to observe behavior of a running system as this is intrusive. Providing visibility of program execution is important. This needs to be done without swamping the system with vast amounts of data.

One method of achieving this is via a Processor Branch Trace.

This works by tracking execution from a known start address and sending messages about the address deltas taken by the program. These deltas are typically introduced by jump, call, return and branch type instructions, although interrupts and exceptions are also types of deltas.

Conceptually, the system has one or more of the following fundamental components:

- A core with an instruction trace interface that outputs all relevant information to successfully create a processor branch trace and more. This is a high bandwidth interface: in most implementations, it will supply a large amount of data (instruction address, instruction type, context information, ...) for each core execution clock cycle;
- A hardware encoder that connects to this instruction trace interface and compresses the information into lower bandwidth trace packets;
- A transmission channel to transmit or a memory to store these trace packets;
- A decoder, usually software on an external PC, that takes in the trace packets and, with knowledge of the program binary that's running on the originating hart, reconstructs the program flow. This decoding step can be done off-line or in real-time while the hart is executing.

In RISC-V, all instructions are executed unconditionally or at least their execution can be determined based on the program binary. The instructions between the deltas can all be assumed to

be executed sequentially. Because of this, there is no need to report sequential instructions in the trace, only whether the branches were taken or not and the address of taken indirect branches or jumps. If the program counter is changed by an amount that cannot be determined from the execution binary, the trace decoder needs to be given the destination address (i.e. the address of the next valid instruction). Examples of this are indirect branches or jumps, where the next instruction address is determined by the contents of a register rather than a constant embedded in the program binary.

Interrupts generally occur asynchronously to the program's execution rather than intentionally as a result of a specific instruction or event. Exceptions can be thought of in the same way, even though they can be typically linked back to a specific instruction address. The decoder generally does not know where an interrupt occurs in the instruction sequence, so the trace encoder must report the address where normal program flow ceased, as well as give an indication of the asynchronous destination which may be as simple as reporting the exception type. When an interrupt or exception occurs, or the processor is halted, the final instruction retired beforehand must be included in the trace.

This document serves to specify the ingress port (the signals between the RISC-V core and the encoder), compressed branch trace algorithm and the packet format used to encapsulate the compressed branch trace information.

1.1 Terminology

The following terms have a specific meaning in this specification.

- **ATB**: Arm trace bus
- **branch**: an instruction which conditionally changes the execution flow
- **CSR**: control/status register
- **decoder**: a piece of software that takes the trace packets emitted by the encoder and reconstructs the execution flow of the code executed by the RISC-V hart
- **delta**: a change in the program counter that is other than the difference between two instructions placed consecutively in memory
- **discontinuity**: another name for 'delta' (see above)
- **ELF**: executable and linkable format
- **encoder**: a piece of hardware that takes in instruction execution information from a RISC-V hart and transforms it into trace packets
- **exception**: an unusual condition occurring at run time associated with an instruction in a RISC-V hart
- **hart**: a RISC-V hardware thread

- **interrupt**: an external asynchronous event that may cause a RISC-V hart to experience an unexpected transfer of control
- **ISA**: instruction set architecture
- **jump**: an instruction which unconditionally changes the execution flow
- **direct jump**: an instruction which unconditionally changes the execution flow by changing the PC by a constant value
- **indirect jump**: an instruction which unconditionally changes the execution flow by changing the PC to a computed value
- **inferable jump**: a jump where the target address is supplied via a constant embedded within the jump opcode
- **uninferable jump**: a jump which is not inferable (see above)
- **LSB**: least significant bit
- **MSB**: most significant bit
- **packet**: the atomic unit of encoded trace information emitted by the encoder
- **PC**: program counter
- **program counter**: a register containing the address of the instruction being executed
- **retire**: the final stage of executing an instruction, when the machine state is updated (sometimes referred to as 'commit' or 'graduate')
- **trap**: the transfer of control to a trap handler caused by either an exception or an interrupt
- **updiscon**: contraction of 'uninferable PC discontinuity'

1.2 Nomenclature

In the following sections items in **bold** are signals or fields within a packet.

Items in ***bold italics*** are mnemonics for instructions or CSRs defined in the RISC-V ISA

Items in *italics* with names ending '*_p*' refer to parameters either built into the hardware or configurable hardware values.

Chapter 2

Branch Trace

Instruction delta tracing, also known as branch tracing, works by tracking execution from a known start address by sending information about the deltas taken by the program. Deltas are typically introduced by jump, call, return and branch type instructions, although interrupts and exceptions are also types of deltas.

Instruction delta tracing provides an efficient encoding of an instruction sequence by exploiting the deterministic way the processor behaves based on the program it is executing.

The approach relies on an offline copy of the program binary being available to the decoder, so it is generally unsuitable for either dynamic (self-modifying) programs or those where access to the program binary is prohibited.

While the program binary is sufficient, access to the assembly or higher-level source code will improve the ability of the decoder to present the decoded trace in the debugger by annotating the traced instructions with source code line numbers and labels, variable names etc.

This approach can be extended to cope with small sections of deterministically dynamic code by arranging for the decoder to request instruction memory from the target. Memory lookups generally lead to a prohibitive reduction in performance, although they are suitable for examining modest jump tables, such as the exception/interrupt vector pointers of an operating system which may be adjusted at boot up and when services are registered. Both static and dynamically linked programs can be traced using this approach. Statically linked programs are straightforward as they generally operate in a known address space, often mapping directly to physical memory. Dynamically linked programs require the debugger to keep track of memory allocation operations using either trace or stop-mode debugging.

2.1 Instruction delta trace concepts

2.1.1 Sequential instructions

For instruction set architectures such as RISC-V where all instructions are executed unconditionally or at least their execution can be determined based on the program binary, the instructions between the deltas are assumed to be executed sequentially. Consequently, there is no need to report them in the trace. The trace only needs to contain whether branches were taken or not, the addresses of taken indirect jumps, or other program counter discontinuities.

2.1.2 Uninferable PC discontinuities

An uninferable program counter discontinuity is a program counter change that can not be inferred from the program binary alone. For these cases, the instruction delta trace must include a destination address: the address of the next valid instruction.

Indirect jumps are an example of this, where the next instruction address is determined by the contents of a register rather than a constant embedded in the program binary. In this case, the address of the instruction following the jump (also known as the jump target) must be traced.

Interrupts and exceptions are another form of uninferable PC discontinuity; these are discussed in detail below.

2.1.3 Branches

A branch is an instruction where a jump is conditional on the value of a register or a flag. For a decoder to be able to follow program flow, the trace must include whether a branch was taken or not.

For a direct branch, where the destination address is encoded in the program binary (either as a constant, or as a constant offset from the program counter), no further information is required. Direct branches are the only type of branch that is supported by the RISC-V ISA.

2.1.4 Interrupts and exceptions

Interrupts are a different type of delta that generally occur asynchronously to the program's execution rather than intentionally as a result of a specific instruction or event. Exceptions can be thought of in the same way, even though they can be typically linked back to a specific instruction address.

The decoder generally does not know where an interrupt occurred in the instruction sequence, so the trace must report the address where normal program flow ceased, as well as give an indication of the asynchronous destination which may be as simple as reporting the exception type. When an interrupt or exception occurs, the final instruction retired beforehand must be traced. Following this the next valid instruction address (the first of the trap handler) must be traced.

Note: not all exceptions and interrupts cause traps (see section 1.1 for definitions). Most notably, floating point exceptions and disabled interrupts do not trap. If an exception or interrupt doesn't trap, the program counter does not change. So, there is no need to trace all exceptions/interrupts, just traps. In this document, interrupts and exceptions are only traced when they cause traps to be taken.

2.1.5 Synchronization

In order to make the trace robust there must be regular synchronization points within the trace. Synchronization is accomplished by sending a full valued instruction address (and potentially a context identifier). The decoder and debugger may also benefit from sending the reason for synchronizing. The frequency of synchronization is a trade-off between robustness and trace bandwidth.

The instruction trace encoder needs to synchronise fully:

- For the first instruction traced after reset or resume from halt;
- Any time that an instruction is traced and the previous instruction was not traced;
- If the instruction is the first of an interrupt service routine or exception handler.
- After a prolonged period of time.

2.1.6 End of trace

If tracing stops for any reason, the address of the final traced instruction must be output.

Some examples of why tracing may stop are:

- The hart may be halted (entered debug mode);
- The hart may be reset;
- Encoding may be stopped (for example via a *Trace-off* trigger - see section 3.2.4);
- The matching criteria for any filtering capabilities implemented by the encoder may no longer be met;
- The encoder may be disabled.

2.2 Optional and run-time configurable modes

An instruction trace encoder may support multiple tracing modes. To ensure that the decoder treats the incoming packets correctly, it needs to be informed of the current active configuration. The configuration is reported by a packet that is issued by the encoder whenever the encoder configuration is changed.

Here are common examples of such modes:

- delta address mode: program counter discontinuities are encoded as differences instead of absolute address values.
- full address mode: program counter discontinuities are encoded as absolute address values.
- implicit exception mode: the destination address of an exception (i.e. the address of the exception trap) is assumed to be known by the decoder, and thus not encoded in the trace.
- Sequentially inferable jump mode: The target of an indirect jump can be inferred by considering the combined effect of two instructions.
- implicit return mode: the destination address of function call returns is derived from a call stack, and thus not encoded in the trace.
- branch prediction mode: branches that are predicted correctly by an encoder branch predictor (and an identical copy in the decoder) are not encoded as taken/non-taken, but as a more efficient branch count number.
- Jump target cache mode: Rather than reporting the address of an uninferable jump target, efficiency can be improved by caching recent jump targets, and reporting the cache entry index instead.

Modes may have associated parameters; see Table 7.1 for further details.

All modes are optional apart from delta address mode, which must be supported.

2.2.1 Delta address mode

Related parameters: None

In delta address mode, addresses are encoded as the difference between the actual address of the current instruction and the actual address of the instruction reported in the previous packet that contained an address. This differential encoding requires fewer bits than the full address, and thus results in more efficient trace compression.

2.2.2 Full address mode

Related parameters: None

In full address mode, all addresses in the trace are encoded as absolute addresses instead of in differential form. This kind of encoding is always less efficient, but it can be a useful debugging aid for software decoder developers.

2.2.3 Implicit exception mode

Related parameters: None

The RISC-V Privileged ISA specification stores exception handler base addresses in the *utvec/stvec/mtvec* CSR registers. In some RISC-V implementations, the lower address bits are stored in the *ucause/scause/mcause* CSR registers.

By default, both the **tvec* and **cause* values are reported when an exception or interrupt occurs.

The implicit exception mode omits **tvec* (the trap handler address), from the trace and thus improves efficiency.

This mode can only be used if the decoder can infer the address of the trap handler from just the exception cause.

2.2.4 Sequentially inferable jump mode

Related parameters: *sijump_p*.

By default, the target of an indirect jump is always considered an uninferable PC discontinuity. However, if the register that specifies the jump target was loaded with a constant then it can be considered inferable under some circumstances. The hart must identify jumps with sequentially inferable targets and provide this information separately to the encoder. The final decision as to whether to treat the jump as inferable or not must be made by the encoder. Both the constant load and the jump must be traced in order for the decoder to be able to infer the jump target. See Section 3.1.1 for details of what constitutes a sequentially inferable jump.

2.2.5 Implicit return mode

Related parameters: *call_counter_size_p*, *return_stack_size_p*, *itype_width_p*.

Although a function return is usually an indirect jump, well behaved programs return to the point in the program from which the function was called using a standard calling convention. For those programs, it is possible to determine the execution path without being explicitly notified of the destination address of the return. The implicit return mode can result in very significant improvements in trace encoder efficiency.

Returns can only be treated as inferable if the associated call has already been reported in an earlier packet. The encoder must ensure that this is the case. This can be accomplished by utilizing a counter to keep track of the number of nested calls being traced. The counter increments on calls (but not tail calls), and decrements on returns (see Section 3.1.1 for definitions). The counter will not over or underflow, and is reset to 0 whenever a synchronization packet is sent. Returns will be treated as inferable and will not generate a trace packet if the count is non-zero (i.e. the associated call was already reported in an earlier packet).

Such a scheme is low cost, and will work as long as programs are "well behaved". The encoder does

not check that the return address is actually that of the instruction following the associated call. As such, any program that modifies return addresses cannot be traced using this mode with this minimal implementation.

Alternatively, the encoder can maintain a stack of expected return addresses, and only treat a return as inferable if the actual return address matches the prediction. This is fully robust for all programs, but is more expensive to implement. In this case, if a return address does not match the prediction, it must be reported explicitly via a packet, along with the number of return addresses currently on the stack. This ensures that the decoder can determine which return is being reported.

2.2.6 Branch prediction mode

Related parameters: *bpred_size_p*.

Without branch prediction, the outcome of each executed branch is stored in a branch map: a bit vector in which the taken/non-taken status of each branch is stored in chronological order.

While this encoding is efficient, at 1 bit per branch, there are some cases where this can still result in a relatively large volume of trace packets. For example:

- Executing tight loops of code containing no uninferable jumps. Each iteration of the loop will add a bit to the branch map;
- Sitting in an idle loop waiting for an interrupt. This produces large amounts of trace when nothing of any interest is actually happening!
- Breakpoints, which in some implementations also spin in an idle loop.

A significant coding efficiency can be obtained by the addition of a branch predictor in the encoder. To keep the encoder and decoder synchronized, a predictor with identical behavior will need to be implemented in the decoder software.

The predictor shall comprise a lookup table of $2^{bpred_size_p}$ entries. Each entry is indexed by bits *bpred_size_p*:1 of the instruction address (or *bpred_size_p*+1:2 if compressed instructions aren't supported), and each contains a 2-bit prediction state:

- 00: predict not taken, transition to 01 if prediction fails;
- 01: predict not taken, transition to 00 if prediction succeeds, else 11;
- 11: predict taken, transition to 10 if prediction fails;
- 10: predict taken, transition to 11 if prediction succeeds, else 00.

The MSB represents the predicted outcome, the LSB the most recent actual outcome. The prediction must fail twice for the predicted value to change.

The lookup table entries are initialized to 01 when a synchronization packet is sent.

Other predictors, such as the gShare predictor (see Hennessy & Patterson), should be considered. Some further experimentation is needed to determine the benefits of different lookup table sizes and predictor algorithms.

2.2.7 Jump target cache mode

Related parameters: *cache_size_p*.

By default, the target address of an uninferable jump is output in the trace, usually in differential form. If the same function is called repeatedly, (for example, in a loop), the same address will be output repeatedly.

An efficiency gain can be obtained by the addition of a jump target cache to the encoder. To keep the encoder and decoder synchronized, a cache with identical behavior will need to be implemented in the decoder software. Even a small cache can provide significant improvement.

The cache shall comprise $2^{\text{cache_size_p}}$ entries, each of which can contain an instruction address. It will be direct mapped, with each entry indexed by bits *cache_size_p*:1 of the instruction address (or *cache_size_p*+1:2 if compressed instructions aren't supported).

Each uninferable jump target is first compared with the entry at its index in the cache. If it is found in the cache, the index number is traced rather than the target address. If it is not found in the cache, the entry at that index is replaced with the current instruction address.

The cache entries are all invalidated when a synchronization packet is sent.

Chapter 3

Hart to encoder interface

3.1 Interface requirements

This section describes in general terms the information which must be passed from the RISC-V hart to the trace encoder, and distinguishes between what is mandatory, and what is optional.

The following information is mandatory:

- The number of instructions that are being retired;
- Whether there has been an exception or interrupt, and if so the cause (from the *ucause/scause/mcause* CSR) and trap value (from the *utval/stval/mtval* CSR);
- The current privilege level of the RISC-V hart;
- The *instruction_type* of retired instructions for:
 - Jumps with a target that cannot be inferred from the source code;
 - Taken and nontaken branches;
 - Return from exception or interrupt (**ret* instructions).
- The *instruction_address* for:
 - Jumps with a target that *cannot* be inferred from the source code;
 - The instruction retired immediately after a jump with a target that *cannot* be inferred from the source code (also referred to as the target or destination of the jump);
 - Taken and nontaken branches;
 - The last instruction retired before an exception or interrupt;
 - The first instruction retired following an exception or interrupt;
 - The last instruction retired before a privilege change;
 - The first instruction retired following a privilege change.

The following information is optional:

- Context information:
 - The context and/or hart ID;
 - The type of action to take when context changes.
- The *instruction_type* of instructions for:
 - Calls with a target that *cannot* be inferred from the source code;
 - Calls with a target that *can* be inferred from the source code;
 - Tail-calls with a target that *cannot* be inferred from the source code;
 - Tail-calls with a target that *can* be inferred from the source code;
 - Returns with a target that *cannot* be inferred from the source code;
 - Returns with a target that *can* be inferred from the source code;
 - Co-routine swap;
 - Jumps which don't fit any of the above classifications with a target that *cannot* be inferred from the source code;
 - Jumps which don't fit any of the above classifications with a target that *can* be inferred from the source code.
- If context is supported then the *instruction_address* for:
 - The last instruction retired before a context change;
 - The first instruction retired following a context change.
- Whether jump targets are sequentially inferable or not.

The mandatory information is the bare-minimum required to implement the branch trace algorithm outlined in Chapter 6. The optional information facilitates alternative or improved trace algorithms:

- Implicit return mode (see Section 2.2.5) requires the encoder to keep track of the number of nested function calls, and to do this it must be aware of all calls and returns regardless of whether the target can be inferred or not;
- A simpler algorithm useful for basic code profiling would only report function calls and returns, again regardless of whether the target can be inferred or not;
- Branch prediction techniques can be used to further improve the encoder efficiency, particularly for loops (see Section 2.2.6). This requires the encoder to be aware of the address of all branches, whether they are taken or not.
- Uninferable jumps can be treated as inferable (which don't need to be reported in the trace output) if both the jump and the preceding instruction which loads the target into a register have been traced.

3.1.1 Jump classification and target inference

Jumps are classified as *inferable*, or *uninferable*. An *inferable* jump has a target which can be deduced from the binary executable or representation thereof (e.g. ELF). For the purposes of this specification, the following strict definition applies:

If the target of a jump is supplied via a constant embedded within the jump opcode, it is classified as *inferable*. Jumps which are not *inferable* are by definition *uninferable*.

However, there are some jump targets which can still be deduced from the binary executable by considering pairs of instructions even though by the above definition they are classified as *uninferable*. Specifically, jump targets that are supplied via

- an *lui* or *c.lui* (a register which contains a constant), or
- an *auipc* (a register which contains a constant offset from the PC).

Such jump targets are classified as *sequentially inferable* if the pair of instructions are retired consecutively (i.e. the *auipc*, *lui* or *c.lui* immediately precedes the jump). Note: the restriction that the instructions are retired consecutively is necessary in order to minimize the additional signalling needed between the hart and the encoder, and should have a minimal impact on trace efficiency as it is anticipated that consecutive execution will be the norm. Support for sequentially inferable jumps is optional.

Jumps may optionally be further classified according to the recommended calling convention:

- *Calls*:
 - *jal* x1;
 - *jal* x5;
 - *jalr* x1, rs where rs != x1;
 - *jalr* x5, rs where rs != x5;
 - *c.jalr* rs1.
- *Tail-calls*:
 - *jal* x0;
 - *c.j*;
 - *jalr* x0, rs where rs != x1 and rs != x5;
 - *c.jr* rs1 where rs1 != x1 and rs1 != x5.
- *Returns*:
 - *jalr* x0, rs where rs == x1 or rs == x5;
 - *c.jr* rs1 where rs1 == x1 or rs1 == x5.
- *Co-routine swap*:

- *jalr* x1, x1;
- *jalr* x5, x5.
- *Other*:
 - *jal* rd where rd != x1 and rd != x5;
 - *jalr* rd, rs where rd != x0 and rd != x1 and rd != x5.

3.1.2 Relationship between RISC-V core and the encoder

The encoder is intended to encode the instructions executed on a single hart.

It is however commonplace for a RISC-V core to contain multiple harts. This can be supported by the core in several different ways:

- Implement a separate instance of the interface per hart. Each instance can be connected to a separate encoder instance, allowing all harts to be traced concurrently. Alternatively, external muxing may be used in conjunction with a single encoder in order to trace one particular hart at a time;
- Implement a single interface for the core, with muxing inside the core to select which hart to connect to the interface.

(Whilst it is technically feasible to use a single encoder with multiple harts operating in a fine-grained multi-threaded configuration, the frequent context changes that would occur as a result of thread-switching would result in extremely poor encoding efficiency, and so this configuration is not recommended.)

3.2 Instruction interface

This section describes the interface between a RISC-V hart and the trace encoder that conveys the information described in the previous section. Signals are assigned to one of the following groups:

- M: Mandatory. The interface must include an instance of this signal.
- O: Optional. The interface may include an instance of this signal.
- MR: Mandatory, may be replicated. For harts that can retire a maximum of N taken branches per clock cycle, the interface must include N instances of this signal.
- OR: Optional, may be replicated. For harts that can retire a maximum of N taken branches per clock cycle, the interface must include zero or N instances of this signal.
- BR: Block, may be replicated. Mandatory for harts that can retire multiple instructions in a block. Replication as per OR. If omitted, the interface must include SR group signals instead.

- **SR**: Single, may be replicated. Mandatory for harts that can only retire one instruction in a block. Replication as per **OR** (see section 3.2.2). If omitted, the interface must include **BR** group signals instead.

Tables 3.1 and 3.2 list the signals in the interface designed to efficiently support retirement of multiple instructions per cycle. The following discussion describes the multiple-retirement behavior. However, for harts that can only retire one instruction at a time, the signalling can be simplified, and this is discussed subsequently in Section 3.2.1.

The information presented in a block represents a contiguous block of instructions starting at **iaddr**, all of which retired in the same cycle. Note if **itype** is 1 or 2 (indicating an exception or an interrupt), the number of instructions retired may be zero. **cause** and **tval** are only defined if **itype** is 1 or 2. If **iretire**=0 and **itype**=0, the values of all other signals are undefined.

iretire contains the number of half-words represented by instructions retired in this block, and **ilastsize** the size of the last instruction. Half-words rather than instruction count enables the encoder to easily compute the address of the last instruction in the block without having access to the size of every instruction in the block.

itype can be 3 or 4 bits wide. If *itype_width_p* is 3, a single code (6) is used to indicate all uninferable jumps. This is simpler to implement, but precludes use of the implicit return mode (see section 2.2.5), which requires jump types to be fully classified.

Whilst **iaddr** is typically a virtual address, it does not affect the encoder's behavior if it is a physical address.

For harts that can retire a maximum of *N* branches per clock cycle, the signal groups **MR**, **OR** and either **BR** or **SR** must be replicated *N* times. Signal group 0 represents information about the oldest instruction block, and group *N*-1 represents the newest instruction block. The interface supports no more than one privilege, context, exception or interrupt per cycle and so signals in groups *M* and *O* are not replicated. Furthermore, **itype** can only take the value 1 or 2 in one of the signal groups, and this must be the newest valid group (i.e. **iretire** and **itype** must be zero for higher numbered groups). If fewer than *N* branches are retired in a cycle, then lower numbered groups must be used first. For example, if there is one branch, use only group 0, if there are two branches, instructions up to the 1st branch must be reported in group 0 and instructions up to the 2nd branch must be reported in group 1 and so on.

sijump is optional and may be omitted if the hart does not implement the logic to detect sequentially inferable jumps. If the encoder offers an **sijump** input it must also provide a parameter to indicate whether the input is connected to a hart that implements this capability, or tied off. This is to ensure the decoder can be made aware of the hart's capability. Enabling sequentially inferable jump mode in the encoder and decoder when the hart does not support it will prevent correct reconstruction by the decoder.

The **context** field can be used to convey any additional information to the decoder. For example:

- The software thread ID;
- The process ID from an operating system;

Table 3.1: Instruction interface signals

Signal	Group	Function
itype [<i>itype_width_p</i> -1:0]	MR	Termination type of the instruction block (see Section 3.1.1 for definitions of codes 6 - 15): 0: Final instruction in the block is none of the other named itype codes; 1: Exception. An exception that traps occurred following the final retired instruction in the block; 2: Interrupt. An interrupt that traps occurred following the final retired instruction in the block; 3: Exception or interrupt return; 4: Nontaken branch; 5: Taken branch; 6: Uninferable jump if <i>itype_width_p</i> is 3, reserved otherwise; 7: reserved; 8: Uninferable call; 9: Inferable call; 10: Uninferable tail-call; 11: Inferable tail-call; 12: Return; 13: Co-routine swap; 14: Other uninferable jump; 15: Other inferable jump.
cause [<i>ecause_width_p</i> -1:0]	M	Exception or interrupt cause (ucause / scause / mcause). Ignored unless itype =1 or 2.
tval [<i>iaddress_width_p</i> -1:0]	M	The associated trap value, e.g. the faulting virtual address for address exceptions, as would be written to the utval / stval / mtval CSR. Future optional extensions may define tval to provide ancillary information in cases where it currently supplies zero. Ignored unless itype =1 or 2.
priv [<i>privilege_width_p</i> -1:0]	M	Privilege level for all instructions retired on this cycle.
iaddr [<i>iaddress_width_p</i> -1:0]	MR	The address of the 1st instruction retired in this block. Invalid if iretire =0
context [<i>context_width_p</i> -1:0]	O	Context for all instructions retired on this cycle.
ctype [<i>ctype_width_p</i> -1:0]	O	Reporting behavior for context : 0: Don't report; 1: Report imprecisely; 2: Report precisely; 3: Report as asynchronous discontinuity.
sijump	OR	If itype indicates that this block ends with an uninferable discontinuity, setting this signal to 1 indicates that it is sequentially inferable and may be treated as inferable by the encoder if the preceding auipc , lui or c.lui has been traced. Ignored for itype codes other than 8, 10, 12 or 14.

Table 3.2: Instruction interface signals - multiple retirement per block

Signal	Group	Function
iretire $[iretire_width_p-1:0]$	BR	Number of halfwords represented by instructions retired in this block.
ilastsize $[ilastsize_width_p-1:0]$	BR	The size of the last retired instruction is $2^{ilastsize}$ half-words.

Table 3.3: Instruction interface signals - single retirement per block

Signal	Group	Function
iretire $[0:0]$	SR	Number of instructions retired in this block (0 or 1).

- It could be used to convey the values of CSRs to the decoder by setting **context** to the CSR number and value when a CSR is written;
- In cases where a single encoder is being shared amongst multiple harts (see section 3.1.2), it could also be used to indicate the hart ID, in cases where the hart ID can be changed dynamically.

Table 3.4 specifies the actions for the various **ctype** values. A typical behaviour would be for this signal to remain zero except on the 1st retirement after a context change. *ctype_width_p* may be 1 or 2. The reduced width option only provides support for reporting context changes imprecisely.

Table 3.4: Context type **ctype** values and corresponding actions

Type	Value	Actions
Unreported	0	No action (don't report context).
Report context imprecisely	1	An example would be a SW thread or operating system process change. Report the new context value at the earliest convenient opportunity. It is reported without any address information, and the assumption is that the precise point of context change can be deduced from the source code (e.g. a CSR write).
Report context precisely	2	Report the address of the 1st instruction retired in this block, and the new context. If there were unreported branches beforehand, these need to be reported first. Treated the same as a privilege change.
Report context as an asynchronous discontinuity	3	An example would be a change of hart. Need to report the last instruction retired on the previous context, as well as the 1st on the new context. Treated the same as an exception.

3.2.1 Simplifications for single-retirement

For harts that can only retire one instruction at a time, the interface can be simplified to the signals listed in tables 3.1 and 3.3. The simplifications can be summarized as follows:

- As the number of instructions that are retired in a block is only 0 or 1, the encoder does not need information to enable it to deduce the address of the last instruction retired (it is the same as the 1st and only instruction retired). So **ilastsize** is not necessary, and **iretire** simply indicates whether an instruction retired or not.

The parameter *retires_p* which indicates to the encoder the maximum number of instructions that can be retired per cycle can be used by an encoder capable of supporting single or multiple retirement to select the appropriate interpretation of **iretire**. The **ilastsize** encoder input must be tied low when attached to a single-retirement hart that does not provide these outputs.

3.2.2 Alternative multiple-retirement interface configurations

For a hart that can retire multiple instructions per cycle, but no more than one branch, the preferred solution is to use one instance of signals from groups BR, MR and OR. However, if the hart can retire N branches in a cycle, N instances of signals from groups MR, OR and either SR or BR must be used (each instance can be either a single instruction or a block).

If the hart can retire N instructions per cycle, but only one branch, it is allowed (though not recommended) to provide explicit details of every instruction retired by using N instances of signals from groups SR, MR and OR.

3.2.3 Optional sideband signals

Optional sideband signals may be included to provide additional functionality, as described in tables 3.5 and 3.6.

Note, any user defined information that needs to be output by the encoder will need to be applied via the **context** input.

Table 3.5: Optional sideband encoder input signals

Signal	Group	Function
impdef _[impdef_width_p-1:0]	O	Implementation defined sideband signals. A typical use for these would be for filtering (see Chapter 4.
trigger _[2:0]	OR	A pulse on bit 0 will cause the encoder to start tracing, and continue until further notice, subject to other filtering criteria also being met. A pulse on bit 1 will cause the encoder to stop tracing until further notice. See section 3.2.4).
halted	O	Hart is halted. Upon assertion, the encoder will output a packet to report the address of the last instruction retired before halting, followed by a support packet to indicate that tracing has stopped. Upon deassertion, the encoder will start tracing again, commencing with a synchronization packet.
reset	O	Hart is in reset. Provided the encoder is in a different reset domain to the hart, this allows the encoder to indicate that tracing has ended on entry to reset, and restarted on exit. Behavior is as described above for halt.

Table 3.6: Optional sideband encoder output signals

Signal	Group	Function
stall	O	Stall request to hart. Some applications may require lossless trace, which can be achieved by using this signal to stall the hart if the trace encoder is unable to output a trace packet (for example due to back-pressure from the packet transport infrastructure).

3.2.4 Using trigger outputs from the Debug Module

The debug module of the RISC-V hart may have a trigger unit. This defines a match control register (*mcontrol*) containing a 4-bit **action** field, and reserves codes 2 - 5 of this field for trace use. These action codes are hereby defined as shown in table 3.7. If implemented, each action must generate a pulse on an output from the hart, on the same cycle as the instruction which caused the trigger is retired.

Table 3.7: Debug Module trigger support (*mcontrol action*)

Value	Description
2	<i>Trace-on.</i> This should be connected to trigger[0] if the encoder provides it.
3	<i>Trace-off.</i> This should be connected to trigger[1] if the encoder provides it.
4	<i>Trace-notify.</i> This should be connected to trigger[2] if the encoder provides it. This will cause the encoder to output a packet containing the address of the last instruction in the block if it is enabled.

Trace-on and Trace-off actions provide a means for the hart to control when tracing occurs. Trace-notify provides means to ensure that a specified instruction is explicitly reported. This capability is sometimes known as a watchpoint.

3.2.5 Example retirement sequences

Table 3.8: Example 1 : 9 Instructions retired over four cycles, 2 branches

Retired	Instruction Trace Block
1000: <i>divuw</i> 1004: <i>add</i> 1008: <i>or</i> 100C: <i>c.jalr</i>	iretire=7, iaddr=0x1000, itype=8
0940: <i>addi</i> 0944: <i>c.beq</i>	iretire=3, iaddr=0x0940, itype=4
0946: <i>c.bnez</i>	iretire=1, iaddr=0x0946, itype=5
0988: <i>lbu</i> 098C: <i>csrrw</i>	iretire=4, iaddr=0x0988, itype=0

Chapter 4

Filtering

The contents of this chapter are informative only.

Filtering provides a mechanism to control whether the encoder should produce trace. For example, it may be desirable to trace:

- When the instruction address is within a particular range;
- Starting from one instruction address and continuing until a second instruction address;
- For one or more specified privilege levels;
- For a particular context or range of contexts;
- Exception and/or interrupt handlers for specified exception causes or with particular **tval** values;
- Based on values applied to the **impdef** or **trigger** signals;
- For a fixed period of time
- etc.

How this is accomplished is implementation specific.

One suggested implementation provides:

- Comparators offering a range of arithmetic options (<, >, =, !=, etc) for **iaddress**, **context** and **tval** inputs;
- Multiple choice selection for **priv** and **cause** inputs;
- Masked matching for **interrupt** and **impdef** inputs;
- The ability to enable tracing when **trigger[0]** is asserted, and continue tracing until **trigger[0]** is asserted (see Section [3.2.4](#)).

Chapter 5

Trace Encoder Output Packets

The bulk of this section describes the payload of packets output from the Trace Encoder. The infrastructure used to transport these packets is outside the scope of this document, and as such the manner in which packets are encapsulated for transport is not specified. However, the following information must be provided to the encapsulator:

- The packet type;
- The packet length, in bytes;
- The packet payload.

Two example transport schemes are the UltraSoC Messaging Infrastructure, and the Arm Trace Bus. Figure 5.1 shows the encapsulation used for the UltraSoC infrastructure:

- The header byte contains a 5-bit field specifying the payload length in bytes, a 2-bit field indicating the "flow" (destination routing indicator), and a bit to indicate whether an optional 16-bit timestamp is present;
- The index field indicates the source of the packet. The number of bits is system dependent, And the initial value emitted by the trace encoder is zero (it gets adjusted as it propagates through the infrastructure);
- An optional 2-byte timestamp;
- The packet payload.



Figure 5.1: Example encapsulated packet format

Alternatively, for ATB, the source of the packet is indicated by the **ATID** bus field, and there is no equivalent of "flow", so an example encapsulation might be:

- A 5-bit field specifying the payload length in bytes
- A bit to indicate whether an optional 16-bit timestamp is present;
- An optional 2-byte timestamp;
- The packet payload.

It may be desirable for packets to start aligned to an ATB word, in which the **ATBYTES** bus field in the last beat of a packet can be used to indicate the number of valid bytes.

The remainder of this section describes the contents of the payload portion which should be independent of the infrastructure. In each table, the fields are listed in transmission order: first field in the table is transmitted first, and multi-bit fields are transmitted LSB first.

This packet payload format is used to output encoded instruction trace. Three different formats are used according to the needs of the encoding algorithm. The following tables show the format of the payload - i.e. excluding any encapsulation.

In order to achieve best performance, actual packet lengths may be adjusted using 'sign based compression'. At the very minimum this should be applied to the address field of format 1 and 2 packets, but ideally will be applied to the whole packet, regardless of format. This technique eliminates identical bits from the most significant end of the packet, and adjusts the length of the packet accordingly. A decoder receiving this shortened packet can reconstruct the original full-length packet by sign-extending from the most significant received bit.

Where the payload length given in the following tables, or after applying sign-based compression, is not a multiple of whole bytes in length, the payload must be sign-extended to the nearest byte boundary.

Whilst offering maximum encoding efficiency, variable length packets can present some challenges, specifically in terms of identifying where the boundaries between packets occur either when packed packets are written to memory, or when packets are streamed offchip via a communications channel. Two potential solutions to this are as follows:

- If the maximum packet payload length is $2^N - 1$ (for example, if N is 5, then the maximum length is 31 bytes), and the minimum packet payload length is 1, then a sequence of at least 2^N zero bytes cannot occur within a packet payload, and therefore the first non-zero byte seen after a sequence of at least 2^N zero bytes must be the first byte of a packet. This approach can be used for alignment in either memory or a data stream;
- An alternative approach suitable for packets written to memory is to divide memory into blocks of M bytes (e.g. 1kbyte blocks), and write packets to memory such that the first byte in every block is always the first byte of a packet. This means packets cannot span block boundaries, and so zero bytes must be used to pad between the end of the last message in a block and the block boundary.

5.1 Format 3 packets

Format 3 packets are used for synchronization, reporting context and supporting information. There are 4 sub-formats.

Throughout this document, the term "synchronization packet" is used. This refers specifically to format 3, subformat 0 and subformat 1 packets.

5.2 Format 3 subformat 0 - Synchronisation

This packet contains all the information the decoder needs to fully identify an instruction. It is sent for the first traced instruction (unless that instruction also happens to be the first in an exception handler), and when resynchronization has been scheduled by expiry of the resynchronisation timer.

Table 5.1: Packet format 3, subformat 0

Field name	Bits	Description
format	2	11 (sync): synchronisation
subformat	2	00 (start): Start of tracing, or resync
branch	1	Set to 0 if the address points to a branch instruction, and the branch was taken. Set to 1 if the instruction is not a branch or if the branch is not taken.
privilege	<i>privilege_width_p</i>	The privilege level of the reported instruction
context	<i>context_width_p</i> , or 0 if <i>nocontext_p</i> is 1	The instruction context
address	<i>iaddress_width_p</i> - <i>iaddress_lsb_p</i>	Full instruction address. Address alignment is determined by <i>iaddress_lsb_p</i> . Address must be left shifted in order to recreate original byte address.

5.2.1 Format 3 branch field

This bit indicates the taken/not taken status in the case where the reported address points to a branch instruction. Overall efficiency would be slightly improved if this bit was removed, and the branch status was instead "carried over" and reported in the next *te_inst* packet. This was considered, but there are several pathological cases where this approach fails. Consider for example the situation where the first traced instruction is a branch, and this is then followed immediately by an exception. This results in format 3 packets being generated on two consecutive instructions. The second packet does not contain a branch map, so there is no way to report the branch status of the 1st branch, apart from by inserting a format 1 packet in between. There are two issues with this:

- It would require the generation of 2 packets on the same cycle, which adds significant additional complexity to the encoder;
- It would complicate the algorithm shown in figure 6.1.

5.3 Format 3 subformat 1 - Exception

This packet also contains all the information the decoder needs to fully identify an instruction. It is sent following an exception, and as well as reporting the address of the exception handler, it also includes the exception cause and the address of the faulted instruction.

If the implicit exception mode is enabled (see section 2.2.3), the address is omitted.

Table 5.2: Packet format 3, subformat 1

Field name	Bits	Description
format	2	11 (sync): synchronisation
subformat	2	01 (exception): Exception cause and trap handler address.
branch	1	Set to 0 if the address points to a branch instruction, and the branch was taken. Set to 1 if the instruction is not a branch or if the branch is not taken.
privilege	<i>privilege_width_p</i>	The privilege level of the reported instruction.
context	<i>context_width_p</i> , or 0 if <i>nocontext_p</i> is 1	The instruction context.
ecause	<i>ecause_width_p</i>	Exception cause.
interrupt	1	Interrupt.
address	<i>iaddress_width_p</i> - <i>iaddress_lsb_p</i>	Full instruction address. Address alignment is determined by <i>iaddress_lsb_p</i> . Address must be left shifted in order to recreate original byte address.
tvalepc	<i>iaddress_width_p</i>	Exception address if ecause is 2 and interrupt is 0 (illegal instruction exception), or trap value otherwise.

5.3.1 Format 3 tvalepc field

This field reports the address of illegal instructions, or the trap value otherwise. This ensures that the address of the faulting instruction is reported for all required cases. The trap value is set to the address of the faulting instruction for hardware breakpoints, access or page faults and instructions, loads or stores that are mis-aligned, but not for illegal instructions (for which it is set to the opcode).

5.4 Format 3 subformat 2 - Context

This packet contains only the context, and is output when the context changes and can be reported imprecisely (see Table 3.4).

Table 5.3: Packet format 3, subformat 2

Field name	Bits	Description
format	2	11 (sync): synchronisation
subformat	2	10 (context): Context change
privilege	<i>privilege_width_p</i>	The privilege level of the new context.
context	<i>context_width_p</i>	The instruction context.

5.5 Format 3 subformat 3 - Support

This packet provides supporting information to aid the decoder. It is issued when

- Trace is enabled or disabled;
- The operating mode changes;
- One or more trace packets cannot be sent (for example, due back-pressure from the packet transport infrastructure).

The **options** field is a placeholder that must be replaced by an implementation specific set of individual bits - one for each of the optional modes supported by the encoder.

5.5.1 Format 3 subformat 3 `qual_status` field

When tracing ends, the encoder reports the address of the last traced instruction, and follows this with a format 3, subformat 3 (supporting information) packet. Two codes are provided for indicating that tracing has ended: **ended_rep** and **ended_upd**. This relates to exactly the same ambiguous case described in detail in section 5.6.2, and in principle, the mechanism described in that section can be used to disambiguate when the last traced instruction is at `loplabel`. However, that mechanism relies on knowing when creating the format 1/2 packet, that a format 3 packet will be generated from the next instruction. This is possible because the encoding algorithm uses a 3-stage pipe with access to the previous, current and next instructions. However, decoding that the next instruction is a privilege change or exception is straightforward, but determining whether the next instruction meets the filtering criteria is much more involved, and this information won't typically be available, at least not without adding an additional pipeline stage, which is expensive. This means a different mechanism is required, and that is provided by having two codes to indicate that tracing has ended:

- **ended_rep** indicates that the preceding packet would not have been issued if tracing hadn't ended, which means that tracing stopped after executing `loplabel` in the 1st loop iteration;
- **ended_upd** indicates that the preceding packet would have been issued anyway because of an uninferable PC discontinuity, which means that tracing stopped after executing `loplabel` in the 2nd loop iteration;

Table 5.4: Packet format 3, subformat 3

Field name	Bits	Description
format	2	11 (sync): synchronisation
subformat	2	11 (support): Supporting information for the decoder
enable	1	Indicates if the encoder is enabled
encoder_mode	N	Identifies trace algorithm Details and number of bits implementation dependent. Currently Branch trace is the only mode defined, indicated by the value 0.
qual_status	2	Indicates qualification status 00 (no_change): No change to filter qualification 01 (ended_rep): Qualification ended, preceding te_inst sent explicitly to indicate last qualification instruction 10: (trace_lost): One or more packets lost. 11 : (ended_upd): Qualification ended, preceding te_inst would have been sent anyway due to an up-discon, even if it wasn't the last qualified instruction)
options	N	Values of all run-time configuration bits Number of bits and definitions implementation dependent. Examples might be - 'sequentially inferred jumps' Don't report the targets of sequentially inferable jumps - 'implicit return' Don't report function return addresses - 'implicit exception' Exclude address from format 3, sub-format 1 <i>te_inst</i> packets if trap vector can be determined from <i>ecause</i> - 'branch prediction' Branch predictor enabled - 'jump target cache' Jump target cache enabled - 'full address' Always output full addresses (SW debug option)

If the encoder implementation does have early access to the filtering results, and the designer chooses to use the **updiscon** bit when the last qualified instruction is also the instruction following an uninferable PC discontinuity, loss of qualification should always be indicated using **ended_rep**.

5.6 Format 2 packets

This packet contains only an instruction address, and is used when the address of an instruction must be reported, and there is no unreported branch information. The address is in differential format unless full address mode is enabled (see section 2.2.2).

Table 5.5: Packet format 2

Field name	Bits	Description
format	2	10 (addr-only): differential address and no branch information
address	$iaddress_width_p - iaddress_lsb_p$	Differential instruction address.
notify	1	If the value of this bit is different from the MSB of address , it indicates that this packet is reporting an instruction that is not the target of an uninferable discontinuity because a notification was requested via trigger[2] (see section 3.2.4).
updiscon	1	If the value of this bit is different from notify , it indicates that this packet is reporting the instruction following an uninferable discontinuity and is also the instruction before an exception, privilege change or resync (i.e. it will be followed immediately by a format 3 <i>te_inst</i>).
irfail	1	If the value of this bit is different from updiscon , it indicates that this packet is reporting the instruction following a return because its address differs from the predicted return address at the top of the implicit_return return address stack.
irdepth	$return_stack_size_p + call_counter_size_p$	If the value of irfail is different from updiscon , this field indicates the number of entries on the return address stack (i.e. the entry number of the return that failed). If irfail is the same value as updiscon , all bits in this field will also be the same value as updiscon .

5.6.1 Format 2 notify field

This bit is encoded so that most of the time it will take the same value as the MSB of the **address** field, and will therefore compress away, having no impact on the encoding efficiency. It is required in order to cover the case where an address is reported as a result of a notification request, signalled

by setting the **trigger**[2] input to 1.

5.6.2 Format 2 notify and updiscon fields

These bits are encoded so that most of the time they will compress away, having no impact on efficiency, by taking on the same value as the preceding bit in the packet (**notify** is normally the same value as the MSB of the **address** field, and **updiscon** is normally the same value as **notify**). They are required in order to cover a pathological case where otherwise the decoding software would not be able to reconstruct the program execution unambiguously. Consider the following code fragment:

```
looplabel - 4: opcode A
looplabel   : opcode B
looplabel + 4: opcode C
:
looplabel + N: JALR # Jump to looplabel
```

This is a loop with an indirect jump back to the next iteration. This is an uninferable discontinuity, and will be reported via a format 1 or 2 packet. Note however that the initial entry into the loop is fall-through from the instruction at looplabel - 4, and will not be reported explicitly. This means that when reconstructing the execution path of the program, the looplabel address is encountered twice. On first glance, it appears that the decoder can determine when it reaches the loop label for the 1st time that this is not the end of execution, because the preceding instruction was not one that can cause an uninferable discontinuity. It can therefore continue reconstructing the execution path until it reaches the **JALR**, from where it can deduce that *opcode B* at looplabel is the final retired instruction. However, there are circumstances where this approach does not work. For example, consider the case where there is an exception at looplabel + 4. In this case, the decoder cannot tell whether this occurred during the 1st or 2nd loop iterations, without additional information from the encoder. This is the purpose of the **updiscon** field. In more detail:

There are four scenarios to consider:

1. Code executes through to the end of the 1st loop iteration, and the encoder reports looplabel using format 1/2 following the **JALR**, then carries on executing the 2nd pass of the loop. In this case **updiscon** == **notify**. The next packet will be a format 1/2;
2. Code executes through to the end of the 1st loop iteration and jumps back to looplabel, but there is then an exception, privilege change or resync in the second iteration at looplabel + 4. In this case, the encoder reports looplabel using format 1/2 following the **JALR**, with **updiscon** == **!notify**, and the next packet is a format 3;
3. An exception occurs immediately after the 1st execution of looplabel. In this case, the encoder reports looplabel using format 0/1/2 with **updiscon** == **notify**, and the next packet is a format 3;
4. The hart requests the encoder to notify retirement of the instruction at looplabel. In this case, the encoder reports the 1st execution of looplabel with **notify** == **!address[MSB]**,

and subsequent executions with **notify** == **address[MSB]** (because they would have been reported anyway as a result of the **JALR**).

Looking at this from the perspective of the decoder, the decoder receives a format 1/2 reporting the address of the 1st instruction in the loop (looplabel). It follows the execution path from the last reported address, until it reaches looplabel. Because looplabel is not preceded by an uninferable discontinuity, it must take the value of **notify** and **updiscon** into consideration, and may need to wait for the next packet in order to determine whether it has reached the final retired instruction:

- If **updiscon** == !**notify**, this indicates case 2. The decoder must continue until it encounters looplabel a 2nd time;
- If **updiscon** == **notify**, the decoder cannot yet distinguish cases 1 and 3, and must wait for the next packet.
 - If the next packet is a format 3, this is case 3. The decoder has already reached the correct instruction;
 - If the next packet is a format 1/2, this is case 1. The decoder must continue until it encounters looplabel a 2nd time.
- If **notify** == !**address[MSB]**, this indicates case 4, 1st iteration. The decoder has reached the correct instruction.

This example uses an exception at looplabel + 4, but anything that could cause a format 3 for looplabel + 4 would result in the same behavior: a privilege change, or the expiry of the resync timer. It could also occur if looplabel was the last traced instruction (because tracing was disabled for some reason). See section 5.5.1 for further discussion of this point.

Note: Correct decoder behavior could have been achieved by implementing the **notify** bit only, setting it to the inverse of **address[MSB]** whenever an address is reported and it is not the instruction following an uninferable discontinuity. However, this would have been much less efficient, as this would have required **notify** to be different from **address[MSB]** the majority of the time when outputting a format 1/2 before an exception, interrupt or resync (as the probability of this instruction being the target of an uninferable jump is low). Using 2 separate bits results in superior compression.

5.6.3 Format 2 irfail and irdepth fields

These bits are encoded so that most of the time they will take the same value as the **updiscon** field, and will therefore compress away, having no impact on the encoding efficiency. If **implicit_return** mode is enabled, the encoder maintains a count of the number of traced calls (*call_counter_size_p* non-zero) or a stack of predicted return addresses (*return_stack_size_p* non-zero). Predicted return addresses are compared with the actual return addresses, and a *te_inst* packet will be generated if a misprediction occurs. Furthermore, a return that would not normally be reported (because the call counter is non-zero, or because it matches the predicted return address) may need to be reported anyway if it happens to be the last instruction before an exception (for example).

In either case, in order to correctly reconstruct the execution path of the program, the decoder will need to know which return it was that is being reported explicitly. If a return is reported because the return address stack is empty or the call counter is zero, these fields will take the same value as the **updiscon** field.

5.7 Format 1 packets

This packet includes branch information, and is used when either the branch information must be reported (for example because the branch map is full), or when the address of an instruction must be reported, and there has been at least one branch since the previous packet. If included, the address is in differential format unless full address mode is enabled (see section 2.2.2).

5.7.1 Format 1 updiscon field

See section 5.6.2.

5.7.2 Format 1 branch_map field

When the branch map becomes full it must be reported, but in most cases there is no need to report an address. This is indicated by setting **branches** to 0. The exception to this is when the instruction immediately prior to the final branch causes an uninferable discontinuity, in which case **branches** is set to 31.

The choice of sizes (1, 3, 7, 15, 31) is designed to minimize efficiency loss. On average there will be some 'wasted' bits because the number of branches to report is less than the selected size of the **branch_map** field. Using a tapered set of sizes means that the number of wasted bits will on average be less for shorter packets. If the number of branches between updiscons is randomly distributed then the probability of generating packets with large branch counts will be lower, in which case increased waste for longer packets will have less overall impact. Furthermore, the rate at which packets are generated can be higher for lower branch counts, and so reducing waste for this case will improve overall bandwidth at times where it is most important.

5.7.3 Format 1 irfail and irdepth fields

See section 5.7.3.

Table 5.6: Packet format 1 - address, branch map

Field name	Bits	Description
format	2	01 (diff-delta): includes branch information and may include differential address
branches	5	Number of valid bits branch_map . The number of bits of branch_map is determined as follows: 0: (cannot occur for this format) 1: 1 bit 2-3: 3 bits 4-7: 7 bits 8-15: 15 bits 16-31: 31 bits For example if branches = 12, branch_map is 15 bits long, and the 12 LSBs are valid.
branch_map	Determined by branches field.	An array of bits indicating whether branches are taken or not. Bit 0 represents the oldest branch instruction executed. For each bit: 0: branch taken 1: branch not taken
address	$iaddress_width_p - iaddress_lsb_p$	Differential instruction address.
notify	1	If the value of this bit is different from the MSB of address , it indicates that this packet is reporting an instruction that is not the target of an uninferable discontinuity because a notification was requested via trigger[2] (see section 3.2.4).
updiscon	1	If the value of this bit is different from the MSB of notify , it indicates that this packet is reporting the instruction following an uninferable discontinuity and is also the instruction before an exception, privilege change or resync (i.e. it will be followed immediately by a format 3 <i>te_inst</i>).
irfail	1	If the value of this bit is different from updiscon , it indicates that this packet is reporting the instruction following a return because its address differs from the predicted return address at the top of the implicit_return return address stack.
irdepth	$return_stack_size_p + call_counter_size_p$	If the value of irfail is different from updiscon , this field indicates the number of entries on the return address stack (i.e. the entry number of the return that failed). If irfail is the same value as updiscon , all bits in this field will also be the same value as updiscon .

Table 5.7: Packet format 1 - no address, branch map

Field name	Bits	Description
format	2	01 (diff-delta): includes branch information and may include differential address
branches	5	Number of valid bits in branch_map . The length of branch_map is determined as follows: 0: 31 bits, no address in packet 1-31: (cannot occur for this format)
branch_map	31	An array of bits indicating whether branches are taken or not. Bit 0 represents the oldest branch instruction executed. For each bit: 0: branch taken 1: branch not taken

5.8 Format 0 packets

This format is intended for optional efficiency extensions. Currently two extensions are defined, for reporting counts of correctly predicted branches, and for reporting the jump target cache index.

If branch prediction is supported and is enabled, then there is a choice of whether to output a full branch map (via format 1), or a count of correctly predicted branches. The count format is used if the number of correctly predicted branches is at least 31. If there are 31 unreported branches (i.e. the branch map is full), but not all of them were predicted correctly, then the branch map will be output. A branch count will be output under the following conditions:

- A branch is mis-predicted. The count value will be the number of correctly predicted branches, minus 31. No address information is provided - it is implicitly that of the branch which failed prediction;
- An updiscon, interrupt or exception requires the encoder to output an address. In this case the encoder will output the branch count (number of correctly predicted branches, minus 31);
- The branch count reaches its maximum value. Strictly speaking an address isn't required for this case, but is included to avoid having to distinguish the packet format from the case above. It will occur so rarely that the bandwidth impact can be ignored.

If a jump target cache is supported and enabled, and the address to report following an updiscon is in the cache then the encoder can output the cache index using format 0, subformat 1. However, the encoder may still choose to output the differential address using format 1 or 2 if the resulting packet is shorter. This may occur if the differential address is zero, or very small.

5.8.1 Format 0 subformat field

The width of this field depends on the number of optional formats supported. Currently, two optional formats are defined (correctly predicted branches and jump target cache). The width

Table 5.8: Packet format 0, subformat 0 - no address, branch count

Field name	Bits	Description
format	2	00 (opt-ext): formats for optional efficiency extensions
subformat	See section 5.8.1	0 (correctly predicted branches)
branch_count	32	Count of the number of correctly predicted branches, minus 31.
branch_fmt	2	00 (no-addr): Packet does not contain an address , and the branch following the last correct prediction failed. 01-11: (cannot occur for this format)

is specified by the *fos_width* discovery field (see section 7.1). If multiple optional formats are supported, the field width must be non-zero. However, if only one optional format is supported, the field can be omitted, and the value of the field inferred from the **options** field in the support packet (see section 5.5). This provision allows additional formats to be added in future without reducing the efficiency of the existing formats.

5.8.2 Format 0 **branch_fmt** field

This is encoded so that when no address is required it will be zero, allowing the upper bits of the **branch_count** field to be compressed away.

When a branch count is reported without an address it is because a branch has failed the prediction. However, when an address is reported along with a branch count, it will be because the packet was initiated by an uninferable discontinuity, an exception, or because a branch has been encountered when **branch_count** is 0xffff_fff. For the latter case, the reported address will always be for a branch, and in the former cases it may be. If it is a branch, it is necessary to be explicit about whether or not the prediction was met or not. If it is met, then the reported address is that of the last correctly predicted branch.

5.8.3 Format 0 **irfail** and **irdepth** fields

These bits are encoded so that most of the time they will take the same value as the immediately preceding bit (**updiscon**, **branch_map**[MSB] or **branches**[MSB] depending on the specific packet format). Purpose and behaviour is as described in section 5.7.3.

For the jump target cache (subformat 1), they are included to allow return addresses that fail the implicit return prediction but which reside in the jump target cache to be reported using this format. An implementation could omit these if all implicit return failures are reported using format 1.

Table 5.9: Packet format 0, subformat 0 - address, branch count

Field name	Bits	Description
format	2	00 (opt-ext): formats for optional efficiency extensions
subformat	See section 5.8.1	0 (correctly predicted branches)
branch_count	32	Count of the number of correctly predicted branches, minus 31.
branch_fmt	2	10 (addr): Packet contains an address . If this points to a branch instruction, then the branch was predicted correctly. 11 (addr-fail): Packet contains an address that points to a branch which failed the prediction. 00,01: (cannot occur for this format)
address	$iaddress_width_p - iaddress_lsb_p$	Differential instruction address.
notify	1	If the value of this bit is different from the MSB of address , it indicates that this packet is reporting an instruction that is not the target of an uninferable discontinuity because a notification was requested via trigger[2] (see section 3.2.4).
updiscon	1	If the value of this bit is different from notify , it indicates that this packet is reporting the instruction following an uninferable discontinuity and is also the instruction before an exception, privilege change or resync (i.e. it will be followed immediately by a format 3 <i>te_inst</i>).
irfail	1	If the value of this bit is different from updiscon , it indicates that this packet is reporting the instruction following a return because its address differs from the predicted return address at the top of the implicit_return return address stack.
irdepth	$return_stack_size_p + call_counter_size_p$	If the value of irfail is different from updiscon , this field indicates the number of entries on the return address stack (i.e. the entry number of the return that failed). If irfail is the same value as updiscon , all bits in this field will also be the same value as updiscon .

Table 5.10: Packet format 0, subformat 1 - jump target index, branch map

Field name	Bits	Description
format	2	00 (opt-ext): formats for optional efficiency extensions
subformat	See section 5.8.1	1 (jump target cache)
index	<i>cache_size_p</i>	Jump target cache index of entry containing target address.
branches	5	Number of valid bits in branch_map . The length of branch_map is determined as follows: 0: (cannot occur for this format) 1: 1 bit 2-3: 3 bits 4-7: 7 bits 8-15: 15 bits 16-31: 31 bits For example if branches = 12, branch_map is 15 bits long, and the 12 LSBs are valid.
branch_map	Determined by branches field.	An array of bits indicating whether branches are taken or not. Bit 0 represents the oldest branch instruction executed. For each bit: 0: branch taken 1: branch not taken
irfail	1	If the value of this bit is different from branch_map [MSB], it indicates that this packet is reporting the instruction following a return because its address differs from the predicted return address at the top of the implicit_return return address stack.
irdepth	<i>return_stack_size_p</i> + <i>call_counter_size_p</i>	If the value of irfail is different from branch_map [MSB], this field indicates the number of entries on the return address stack (i.e. the entry number of the return that failed). If irfail is the same value as branch_map [MSB], all bits in this field will also be the same value as branch_map [MSB].

Table 5.11: Packet format 0, subformat 1 - jump target index, no branch map

Field name	Bits	Description
format	2	00 (opt-ext): formats for optional efficiency extensions
subformat	See section 5.8.1	1 (jump target cache)
index	<i>cache_size_p</i>	Jump target cache index of entry containing target address.
branches	5	Number of valid bits in branch_map . The length of branch_map is determined as follows: 0: no branch_map in packet 1-31: (cannot occur for this format)
irfail	1	If the value of this bit is different from branches [MSB], it indicates that this packet is reporting the instruction following a return because its address differs from the predicted return address at the top of the implicit_return return address stack.
irdepth	<i>return_stack_size_p</i> + <i>call_counter_size_p</i>	If the value of irfail is different from branches [MSB], this field indicates the number of entries on the return address stack (i.e. the entry number of the return that failed). If irfail is the same value as branches [MSB], all bits in this field will also be the same value as branches [MSB].

Chapter 6

Reference Algorithm

The contents of this chapter are informative only.

A reference algorithm for compressed branch trace is given in figure 6.1. In the diagram, the following terms are used:

- *te_inst*. The name of the packet type emitted by the encoder (see Chapter 5);
- *inst*. Abbreviation for 'instruction';
- *updiscon*. Uninferable PC discontinuity. This identifies an instruction that causes the program counter to be changed by an amount that cannot be predicted from the source code alone (**itype** values 8, 10, 12 or 14);
- *Qualified?* An instruction that meets the filtering criteria is qualified, and will be traced;
- *Branch?* Is the instruction a branch or not (**itype** values 4 or 5);
- *branch map*. A vector where each bit represents the outcome of a branch. A 0 indicates the branch was taken, a 1 indicates that it was not;
- *e_ccd*. An exception has been signalled, or context has changed and should be treated as an uninferable PC discontinuity (see Table 3.4);
- *ppch*. Privilege has changed, or context has changed and needs to be reported precisely (see Table 3.4);
- *ppch_br*. As above, but branch map not empty;
- *er_ccdn*. Instruction retirement and exception signalled on the same cycle, or context has changed and should be treated as an uninferable PC discontinuity, or context notification (see Table 3.4);
- *exc_only*. Exception signalled without simultaneous retirement;
- *cci*. context change that can be reported imprecisely (see Table 3.4);
- *rep_br*. Report branches due to full branch map or misprediction;

- *branches*. The number of branches encountered but not yet reported to the decoder;
- *pbc*. Correctly predicted branches count (always zero if branch predictor disabled or not present);
- *resync count*. A counter used to keep track of when it is necessary to send a synchronization packet (see Section 6.2);
- *max_resync*. The resync counter value that schedules a synchronization packet (see Section 6.2);
- *resync_br*. The resync counter has reached the maximum value and there are entries in the branch map that have not yet been output (see Section 6.2).

Figure 6.1 shows instruction by instruction behavior, as would be seen in a single-retirement system only. Whilst the core to encoder interface allows the RISC-V hart to provide information on multiple retiring instructions simultaneously, the resultant packet sequence generated by the encoder must be the same as if retiring one instruction at a time.

A 3-stage pipeline within the encoder is assumed, such that the encoder has visibility of the current, previous and next instructions. All packets are generated using information relating to the current instruction. The orange diamonds indicate decisions based on the previous instruction, the green diamond indicates a decision based on the next instruction, and all other diamonds are based on the current instruction.

Additionally, the encoder can generate one further packet type, not shown on the diagram for clarity. The *support* packet (format 3, subformat 3 - see section 5.5) is sent when:

- The encoder is enabled or disabled, or its configuration is changed, to inform the decoder of the operating mode of the encoder;
- After the final qualified instruction has been traced, to inform the decoder that tracing has stopped;
- If trace packets are lost (for example if the buffer into which packets are being written fills up. In this situation, the 1st packet loaded into the buffer when space next becomes available must be a *support* packet. Following this, tracing will resume with a sync packet.

Note: if the **halted** or **reset** sideband signals are asserted (see Table 3.5) the encoder will behave as if it has received an unqualified instruction (output *te_inst* reporting the address of the previous instruction, followed by *te_support*);

6.1 Format selection

In all cases but two, the packet format is determined only by a 'yes' outcome from the associated decision.

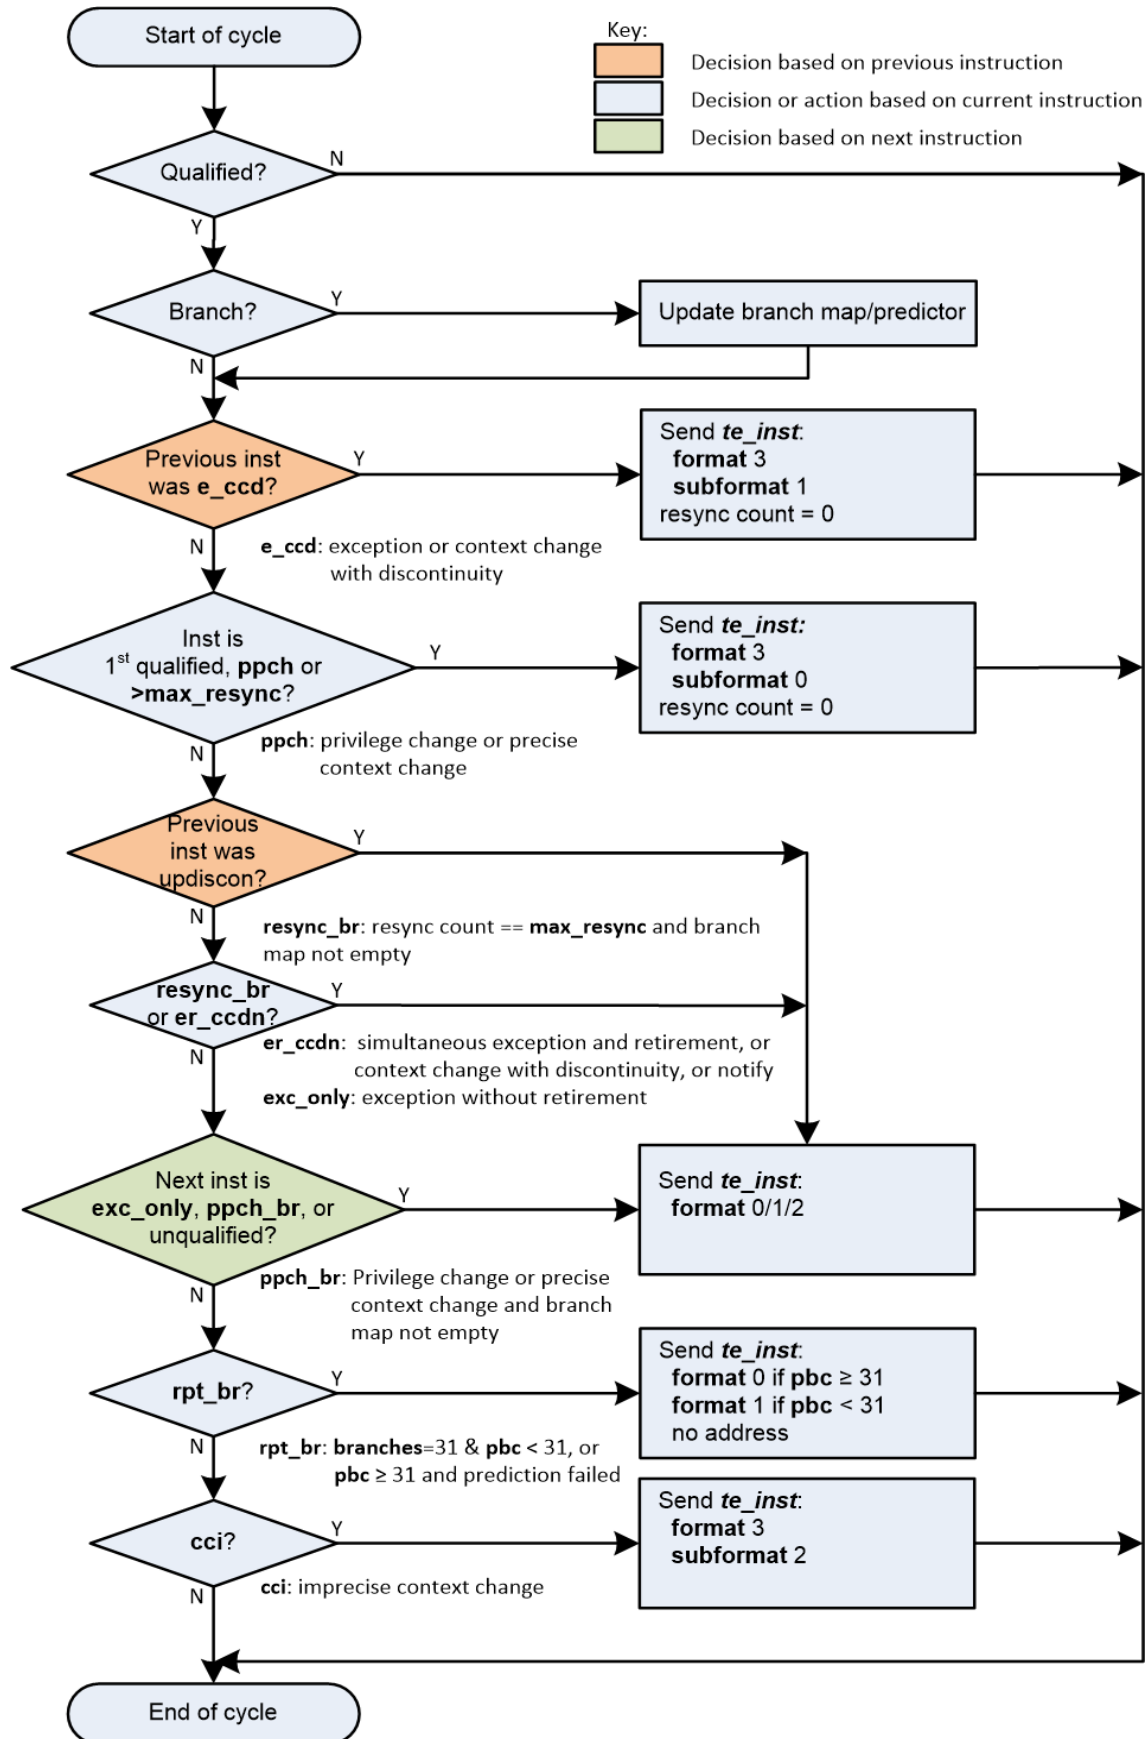


Figure 6.1: Instruction delta trace algorithm

When reporting branch information on its own (without an address), the choice between format 1 and format 0, subformat 0 depends on the number of correctly predicted branches (this will be 0 if the predictor is not supported, or is disabled). No packets are generated until there are at least 31 branches to report. Format 1 is used if the outcome of at least one of those 31 branches was not predicted correctly. If all were predicted correctly, nothing is output at this time, and the encoder continues to count correctly predicted branch outcomes. As soon as one of the branch outcomes is not correctly predicted, the encoder will output a format 0, subformat 0 packet. See also section 5.8.

The choice between formats for the "format 0/1/2" case in the middle of the diagram also needs further explanation.

- If the number of correctly predicted branches is 31 or more, then format 0, subformat 0 is always used;
- Else, if the jump target cache is supported and enabled, and the address being reported is in the cache, then normally format 0, subformat 1 will be used, reporting the cache index associated with the address. This will include branch information if there are any branches to report. However, the encoder may chose to output the equivalent format 1 or 2 packet (containing the differential address, with or without branch information) if that will result in a shorter packet (see section 5.8);
- Else, if there are branches to report, format 1 is used, otherwise format 2.

Packet formats 0, 1 and 2 are organized so that the address is usually the final field. Minimizing the number of bits required to represent the address reduces the total packet size and significantly improves efficiency. See Chapter 5.

6.2 Resynchronisation

Per Section 2.1.5, a format 3 synchronisation packet must be output after "a prolonged period of time". The exact mechanism for determining this is not specified, but options might be to count the number of *te_inst* packets emitted, or the number of clock cycles elapsed, since the previous synchronization message was sent.

When the resync is required, the primary objective is to output a format 3 packet, so that the decoder can start tracing from that point without needing any of the history. However, if the decoder is already synced, then it is also required that it can continue to follow the execution path up to and through the format 3 packet seamlessly. As such, before outputting a format 3 packet, it is necessary to output a format 1 packet for the preceding instruction if there are any unreported branches (because format 3 does not contain a branch map). The format 3 will be sent if the resync timer has been exceeded. On the cycle before this (when the resync timer value has been exactly reached), a format 1 will be generated if the branch map is not empty.

6.3 Multiple retirement considerations

As noted earlier in this section, for a single-retirement system the reference algorithm is applied to each retired instruction. When instructions are retired in blocks, only the first and last instruction in a block need be considered, as all those in between are "uninteresting", and will have no effect on the encoder's state (their route through figure 6.1 does not pass through any of the rectangular boxes).

In most cases, either the first or last instruction of a block (but not both) is interesting, meaning that the encoder does not need to generate more than one packet from a block. However, there are a few cases where this is not true, and it is possible that the encoder will need to generate two packets from the same block.

For example, the first instruction in a block must generate a packet if it is the first traced instruction. However, if the block also indicates an exception or interrupt (**itype**= 1 or 2), then the last instruction in the block must also generate a packet.

As generating multiple packets per cycle would significantly complicate the encoder, and as situations such as this will only occur infrequently, some elastic buffering in the encoder is the preferred approach. This will allow subsequent blocks to be queued whilst the encoder generates two successive packets from a block. The encoder can drain the elastic buffer any time there is a cycle when the hart doesn't report anything, or if there is a block with **itype** = 0 (which is uninteresting to the encoder).

There are pathological cases where consecutive blocks could require packets to be generated from both first and last instructions, but elastic buffering is only required if the blocks are also input on consecutive cycles. In practice there are very few cases where this can occur. The worst so far identified case is a variation on the example above, where the exception is an ecall, and that in turn encounters some other form of exception or interrupt in the first few instructions of the trap handler:

- Block 1: **itype** = 1 (ecall), **iretires** > 1. Generate packet from first instruction (first traced), and last instruction (last before ecall);
- Block 2: **itype** = 1 or 2 (some other exception or interrupt), **iretires** > 0. Generate packet from first instruction (ecall trap handler), and last instruction (last before other exception or interrupt);
- Block 3: Generate packet from first instruction (other exception or interrupt trap handler)

Because the ecall is known to the hart's fetch unit and can be predicted, it may be possible for block 2 to occur the cycle after block 1. However, it is reasonable to assume that the other exception or interrupt will not be predictable, and as a result there will be several cycles between blocks 2 and 3, which will allow the encoder to 'catch up'. It is recommended that encoders implement sufficient elastic buffering to handle this case, and if for some reason the elastic buffer overflows, it should issue a support packet indicating trace lost.

Chapter 7

Parameters and Discovery

This document defines a number of parameters for describing aspects of the encoder such as the widths of buses, the presence or absence of optional features and the size of resources, as listed in Table [7.1](#).

Depending on the implementation, some parameters may be inherently fixed whilst others may be passed in to the design by some means.

Table 7.1: Parameters to the encoder

Parameter name	Range	Description
<i>arch_p</i>		The architecture specification version with which the encoder is compliant (0 for initial version).
<i>bpred_size_p</i>		Number of entries in the branch predictor is $2^{\text{bpred_size_p}}$. Minimum number of entries is 2, so a value of 0 indicates that there is no branch predictor implemented.
<i>cache_size_p</i>		Number of entries in the jump target cache is $2^{\text{cache_size_p}}$. Minimum number of entries is 2, so a value of 0 indicates that there is no jump target cache implemented.
<i>call_counter_size_p</i>		Number of bits in the nested call counter is $2^{\text{call_counter_size_p}}$. Minimum number of entries is 2, so a value of 0 indicates that there is no implicit return call counter implemented.
<i>ctype_width_p</i>		Width of the ctype bus
<i>context_width_p</i>		Width of context bus
<i>ecause_width_p</i>		Width of exception cause bus
<i>ecause_choice_p</i>		Number of bits of exception cause to match using multiple choice
<i>f0s_width_p</i>		Width of the subformat field in format 0 <i>te_inst</i> packets (see section 5.8.1).
<i>filter_context_p</i>	0 or 1	Filtering on context supported when 1
<i>filter_excint_p</i>		Filtering on exception cause or interrupt supported when <i>non_zero</i> . Number of nested exceptions supported is $2^{\text{filter_excint_p}}$
<i>filter_privilege_p</i>	0 or 1	Filtering on privilege supported when 1
<i>filter_tval_p</i>	0 or 1	Filtering on trap value supported when 1 (provided <i>filter_excint_p</i> is non-zero)
<i>iaddress_lsb_p</i>		LSB of instruction address bus to trace. 1 is compressed instructions are supported, 2 otherwise
<i>iaddress_width_p</i>		Width of instruction address bus. This is the same as <i>DXLEN</i>
<i>iretire_width_p</i>		Width of the iretire bus
<i>ilastsize_width_p</i>		Width of the ilastsize bus
<i>itype_width_p</i>		Width of the itype bus
<i>nocontext_p</i>	0 or 1	Exclude context from <i>te_inst</i> packets if 1
<i>privilege_width_p</i>		Width of privilege bus
<i>retires_p</i>		Maximum number of instructions that can be retired per block
<i>return_stack_size_p</i>		Number of entries in the return address stack is $2^{\text{return_stack_size_p}}$. Minimum number of entries is 2, so a value of 0 indicates that there is no implicit return stack implemented.
<i>sijump_p</i>	0 or 1	sijump is used to identify sequentially inferable jumps
<i>taken_branches_p</i>		Number of times iretire , itype etc. are replicated
<i>impdef_width_p</i>		Width of implementation-defined input bus

7.1 Discovery of encoder parameters

To operate correctly, the decoder must be able to determine some of the encoder's parameters at runtime, in the form of discoverable attributes. These parameters must be discoverable by the decoder, or else be fixed at the default value (in other words, if an encoder does not make a particular parameter discoverable, it must implement only the default value of that parameter, which the decoder will also use). Table 7.2 lists the required discoverable attributes.

To access the discoverable attributes, some external entity, for example a debugger or a supervisory hart, must request it from the encoder. The encoder will provide the discovery information in one or more different formats. The preferred format is a packet which is sent over the trace infrastructure. Another format would be allowing the external entity to read the values from some register or memory mapped space maintained by the encoder. Section 7.2 gives an example of how this may be accomplished.

Table 7.2: Required attributes

Name	Default	Parameter mapping
<i>arch</i>	0	<i>arch_p</i>
<i>bpred_size</i>	0	<i>bpred_size_p</i>
<i>cache_size</i>	0	<i>cache_size_p</i>
<i>call_counter_size</i>	0	<i>call_counter_size_p</i>
<i>context_width</i>	0	<i>context_width_p</i> - 1
<i>ecause_width</i>	3	<i>ecause_width_p</i> - 1
<i>f0s_width</i>	0	<i>f0s_width_p</i>
<i>iaddress_lsb</i>	0	<i>iaddress_lsb_p</i> - 1
<i>iaddress_width</i>	31	<i>iaddress_width_p</i> - 1
<i>nocontext</i>	0	<i>nocontext</i>
<i>privilege_width</i>	2	<i>privilege_width_p</i> - 1
<i>return_stack_size</i>	0	<i>return_stack_size_p</i>
<i>sijump</i>	0	<i>sijump_p</i>

For ease of use it is further recommended that all of the encoder's parameters be mapped to discoverable attributes, even if not directly required by the decoder. In particular, attributes related to filtering capabilities. Table 7.3 lists the attributes associated with the filtering recommendations discussed in Chapter 4, and Table 7.4 lists attributes related to other parameters mentioned in this document.

Table 7.3: Optional filtering attributes

Name	Default	Parameter mapping
<i>comparators</i>	0	<i>comparators_p</i> - 1
<i>filters</i>	0	<i>filters_p</i> - 1
<i>ecause_choice</i>	5	<i>ecause_choice_p</i>
<i>filter_context</i>	1	<i>filter_context_p</i>
<i>filter_excint</i>	1	<i>filter_excint_p</i>
<i>filter_privilege</i>	1	<i>filter_privilege_p</i>
<i>filter_tval</i>	1	<i>filter_tval_p</i>

Table 7.4: Other recommended attributes

Name	Default	Description
<i>ctype_width</i>	1	<i>ctype_width_p</i> - 1
<i>ilastsize_width</i>	0	<i>ilastsize_width_p</i> - 1
<i>itype_width</i>	4	<i>itype_width_p</i> - 1
<i>iretire_width</i>	2	<i>iretire_width_p</i> - 1
<i>retires</i>	0	<i>retires_p</i> - 1
<i>taken_branches</i>	0	<i>taken_branches_p</i> - 1
<i>impdef_width</i>	0	<i>impdef_width_p</i> - 1

7.2 Example ipxact description

This section provides an example of discovery information represented in the ipxact form.

```
<?xml version="1.0" encoding="UTF-8"?>
<ipxact:component
  xmlns:ipxact="http://www.accellera.org/XMLSchema/IPXACT/1685-2014"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://www.accellera.org/XMLSchema/IPXACT/1685-2014
    http://www.accellera.org/XMLSchema/IPXACT/1685-2014/index.xsd">
  <ipxact:vendor>UltraSoC</ipxact:vendor>
  <ipxact:library>TraceEncoder</ipxact:library>
  <ipxact:name>TraceEncoder</ipxact:name>
  <ipxact:version>0.8</ipxact:version>
  <ipxact:memoryMaps>
    <ipxact:memoryMap>
      <ipxact:name>Trace Encoder Register Map</ipxact:name>
      <ipxact:addressBlock>
        <ipxact:name>>Trace Encoder Register Address Block</ipxact:name>
        <ipxact:baseAddress>0</ipxact:baseAddress>
        <ipxact:range>128</ipxact:range>
        <ipxact:width>64</ipxact:width>

        <ipxact:register>
          <ipxact:name>discovery_info_0</ipxact:name>
          <ipxact:addressOffset>'h0</ipxact:addressOffset>
          <ipxact:size>64</ipxact:size>
          <ipxact:access>read-only</ipxact:access>
          <ipxact:field>
            <ipxact:name>version</ipxact:name>
            <ipxact:description>text</ipxact:description>
            <ipxact:bitOffset>0</ipxact:bitOffset>
            <ipxact:bitWidth>4</ipxact:bitWidth>
          </ipxact:field>
          <ipxact:field>
            <ipxact:name>minor_revision</ipxact:name>
```

```

        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>4</ipxact:bitOffset>
        <ipxact:bitWidth>4</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>arch</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>8</ipxact:bitOffset>
        <ipxact:bitWidth>4</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>bpred_size</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>12</ipxact:bitOffset>
        <ipxact:bitWidth>4</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>cache_size</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>16</ipxact:bitOffset>
        <ipxact:bitWidth>4</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>call_counter_size</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>20</ipxact:bitOffset>
        <ipxact:bitWidth>3</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>comparators</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>23</ipxact:bitOffset>
        <ipxact:bitWidth>3</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>context_type_width</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>26</ipxact:bitOffset>
        <ipxact:bitWidth>5</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>context_width</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>31</ipxact:bitOffset>
        <ipxact:bitWidth>5</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>ecause_choice</ipxact:name>

```

```

    <ipxact:description>text</ipxact:description>
    <ipxact:bitOffset>36</ipxact:bitOffset>
    <ipxact:bitWidth>3</ipxact:bitWidth>
</ipxact:field>
<ipxact:field>
    <ipxact:name>ecause_width</ipxact:name>
    <ipxact:description>text</ipxact:description>
    <ipxact:bitOffset>39</ipxact:bitOffset>
    <ipxact:bitWidth>4</ipxact:bitWidth>
</ipxact:field>
<ipxact:field>
    <ipxact:name>filters</ipxact:name>
    <ipxact:description>text</ipxact:description>
    <ipxact:bitOffset>43</ipxact:bitOffset>
    <ipxact:bitWidth>4</ipxact:bitWidth>
</ipxact:field>
<ipxact:field>
    <ipxact:name>filter_context</ipxact:name>
    <ipxact:description>text</ipxact:description>
    <ipxact:bitOffset>47</ipxact:bitOffset>
    <ipxact:bitWidth>1</ipxact:bitWidth>
</ipxact:field>
<ipxact:field>
    <ipxact:name>filter_excint</ipxact:name>
    <ipxact:description>text</ipxact:description>
    <ipxact:bitOffset>48</ipxact:bitOffset>
    <ipxact:bitWidth>4</ipxact:bitWidth>
</ipxact:field>
<ipxact:field>
    <ipxact:name>filter_privilege</ipxact:name>
    <ipxact:description>text</ipxact:description>
    <ipxact:bitOffset>52</ipxact:bitOffset>
    <ipxact:bitWidth>1</ipxact:bitWidth>
</ipxact:field>
<ipxact:field>
    <ipxact:name>filter_tval</ipxact:name>
    <ipxact:description>text</ipxact:description>
    <ipxact:bitOffset>53</ipxact:bitOffset>
    <ipxact:bitWidth>1</ipxact:bitWidth>
</ipxact:field>
<ipxact:field>
    <ipxact:name>filter_impdef</ipxact:name>
    <ipxact:description>text</ipxact:description>
    <ipxact:bitOffset>54</ipxact:bitOffset>
    <ipxact:bitWidth>1</ipxact:bitWidth>
</ipxact:field>
<ipxact:field>
    <ipxact:name>f0s_width</ipxact:name>

```

```

        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>55</ipxact:bitOffset>
        <ipxact:bitWidth>2</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>iaddress_lsb</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>57</ipxact:bitOffset>
        <ipxact:bitWidth>2</ipxact:bitWidth>
    </ipxact:field>
</ipxact:register>

```

```

<ipxact:register>
    <ipxact:name>discovery_info_1</ipxact:name>
    <ipxact:addressOffset>'h4</ipxact:addressOffset>
    <ipxact:size>64</ipxact:size>
    <ipxact:access>read-only</ipxact:access>
    <ipxact:field>
        <ipxact:name>iaddress_width</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>0</ipxact:bitOffset>
        <ipxact:bitWidth>7</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>ilastsize_width</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>7</ipxact:bitOffset>
        <ipxact:bitWidth>7</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>itype_width</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>14</ipxact:bitOffset>
        <ipxact:bitWidth>7</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>iretire_width</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>21</ipxact:bitOffset>
        <ipxact:bitWidth>7</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
        <ipxact:name>nocontext</ipxact:name>
        <ipxact:description>text</ipxact:description>
        <ipxact:bitOffset>28</ipxact:bitOffset>
        <ipxact:bitWidth>1</ipxact:bitWidth>
    </ipxact:field>
</ipxact:register>

```

```

    <ipxact:field>
      <ipxact:name>privilege_width</ipxact:name>
      <ipxact:description>text</ipxact:description>
      <ipxact:bitOffset>29</ipxact:bitOffset>
      <ipxact:bitWidth>2</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
      <ipxact:name>retires</ipxact:name>
      <ipxact:description>text</ipxact:description>
      <ipxact:bitOffset>31</ipxact:bitOffset>
      <ipxact:bitWidth>3</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
      <ipxact:name>return_stack_size</ipxact:name>
      <ipxact:description>text</ipxact:description>
      <ipxact:bitOffset>34</ipxact:bitOffset>
      <ipxact:bitWidth>4</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
      <ipxact:name>sijump</ipxact:name>
      <ipxact:description>text</ipxact:description>
      <ipxact:bitOffset>38</ipxact:bitOffset>
      <ipxact:bitWidth>1</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
      <ipxact:name>taken_branches</ipxact:name>
      <ipxact:description>text</ipxact:description>
      <ipxact:bitOffset>39</ipxact:bitOffset>
      <ipxact:bitWidth>4</ipxact:bitWidth>
    </ipxact:field>
    <ipxact:field>
      <ipxact:name>impdef_width</ipxact:name>
      <ipxact:description>text</ipxact:description>
      <ipxact:bitOffset>43</ipxact:bitOffset>
      <ipxact:bitWidth>5</ipxact:bitWidth>
    </ipxact:field>
  </ipxact:register>

</ipxact:addressBlock>
<ipxact:addressUnitBits>8</ipxact:addressUnitBits>
</ipxact:memoryMap>
</ipxact:memoryMaps>
</ipxact:component>

```


Chapter 8

Future Directions

The current focus is the compressed branch trace, however there a number of other types of processor trace that would be useful (detailed below in no particular order). These should be considered as possible features that maybe added in the future, once the current scope has been completed.

8.1 Data trace

The trace encoder will output packets to communicate information about loads and stores to an off-chip decoder. To reduce the amount of bandwidth required, reporting data values will be optional, and both address and data will be able to be encoded differentially when it is beneficial to do so. This entails outputting the difference between the new value and the previous value of the same transfer size, irrespective of transfer direction.

Unencoded values will be used for synchronisation and at other times.

8.2 Fast profiling

In this mode the encoder will provide a non-intrusive alternative to the traditional method of profiling that requires the processor to be halted periodically so that the program counter can be sampled. The encoder will issue packets when an exception, call or return is detected, to report the next instruction executed (i.e. the destination instruction). Optionally, the encoder will also be able to report the current instruction (i.e. the source instruction).

8.3 Inter-instruction cycle counts

In this mode the encoder will trace where the hart is stalling by reporting the number of cycles between successive instruction retirements.

8.4 Transport

After the current charter has been satisfied the transport mechanism should be defined and standardised. This will include Aurora based serdes, PCIe and Ethernet.

Chapter 9

Decoder

This decoder implementation assumes there is no branch predictor or return address stack (*return_stack_size_p* and *bpred_size_p* both zero).

9.1 Decoder pseudo code

```
# global variables
global      pc                # Reconstructed program counter
global      last_pc           # PC of previous instruction
global      branches = 0      # Number of branches to process
global      branch_map = 0    # Bit vector of not taken/taken (1/0) status
                                #   for branches
global bool  stop_at_last_branch = FALSE # Flag to indicate reconstruction is to end at
                                #   the final branch
global bool  inferred_address = FALSE    # Flag to indicate that reported address from
                                #   format 0/1/2 was not following an uninferable
                                #   jump (and is therefore inferred)
global bool  start_of_trace = TRUE        # Flag indicating 1st trace packet still
                                #   to be processed
global      address            # Reconstructed address from te_inst messages
global      options            # Operating mode flags
global array return_stack      # Array holding return address stack
global      irstack_depth = 0   # Depth of the return address stack
```

```

# Process te_inst packet. Call each time a te_inst packet is received #
function process_te_inst (te_inst)
  if (te_inst.format == 3)
    if (te_inst.subformat == 3) # Support packet
      process_support(te_inst)
      return
    if (te_inst.subformat == 2) # Context packet
      return

    inferred_address = FALSE
    address          = (te_inst.address << discovery_response.iaddress_lsb)
    if (te_inst.subformat == 1 or start_of_trace)
      branches      = 0
      branch_map    = 0
    if (is_branch(get_instr(address))) # 1 unprocessed branch if this instruction is a branch
      branch_map = branch_map | (te_inst.branch << branches)
      branches++
    if (te_inst.subformat == 0 and !start_of_trace)
      follow_execution_path(address, te_inst)
    else
      pc          = address
      last_pc     = pc # previous pc not known but ensures correct
                     # operation for is_sequential_jump()
    start_of_trace = FALSE
    irstack_depth  = 0

  else
    if (start_of_trace) # This should not be possible!
      ERROR: Expecting trace to start with format 3
      return
    if (te_inst.format == 2 or te_inst.branches != 0)
      stop_at_last_branch = FALSE
      if (options.full_address)
        address = (te_inst.address << discovery_response.iaddress_lsb)
      else
        address += (te_inst.address << discovery_response.iaddress_lsb)
    if (te_inst.format == 1)
      stop_at_last_branch = (te_inst.branches == 0)
      # Branch map will contain <= 1 branch (1 if last reported instruction was a branch)
      branch_map = branch_map | (te_inst.branch_map << branches)
      if (te_inst.branches == 0)
        branches += 31
      else
        branches += te_inst.branches

    follow_execution_path(address, te_inst)

```

```

# Follow execution path to reported address #
function follow_execution_path(address, te_inst)

    local previous_address = pc
    local stop_here        = FALSE
    while (TRUE)
        if (inferred_address) # iterate again from previously reported address to
                                # find second occurrence
            stop_here = next_pc(previous_address)
            if (stop_here)
                inferred_address = FALSE
        else
            stop_here = next_pc(address)
            if (branches == 1 and is_branch(get_instr(pc)) and stop_at_last_branch)
                # Reached final branch - stop here (do not follow to next instruction as
                # we do not yet know whether it retires)
                stop_at_last_branch = FALSE
                return
            if (stop_here))
                # Reached reported address following an uninferable discontinuity - stop here
                if (branches > (is_branch(get_instr(pc)) ? 1 : 0))
                    # Check all branches processed (except 1 if this instruction is a branch)
                    ERROR: unprocessed branches
                return
            if (te_inst.format != 3 and pc == address and !stop_at_last_branch and
                (te_inst.notify != get_previous_bit(te_inst, "notify")) and
                (branches == (is_branch(get_instr(pc)) ? 1 : 0)))
                # All branches processed, and reached reported address due to notification,
                # not as an uninferable jump target
                return
            if (te_inst.format != 3 and pc == address and !stop_at_last_branch and
                !is_uninferable_discon(get_instr(last_pc)) and
                (te_inst.updiscon == get_previous_bit(te_inst, "updiscon")) and
                (branches == (is_branch(get_instr(pc)) ? 1 : 0)))
                # All branches processed, and reached reported address, but not as an
                # uninferable jump target
                # Stop here for now, though flag indicates this may not be
                # final retired instruction
                inferred_address = TRUE
                return
            if (te_inst.format == 3 and pc == address and
                (branches == (is_branch(get_instr(pc)) ? 1 : 0)))
                # All branches processed, and reached reported address
                return

```

```

# Compute next PC #
function next_pc (address)

    local instr    = get_instr(pc)
    local this_pc = pc

    if (is_inferable_jump(instr))
        pc += instr.imm
    else if (is_sequential_jump(instr, last_pc)) # lui/auipc followed by
                                                # jump using same register
        pc = sequential_jump_target(pc, last_pc)
    else if (is_implicit_return(instr))
        pc = pop_return_stack()
    else if (is_uninferable_discon(instr))
        if (stop_at_last_branch)
            ERROR: unexpected uninferable discontinuity
        else
            pc = address
    else if (is_taken_branch(instr))
        pc += instr.imm
    else
        pc += instruction_size(instr)

    if (is_call(instr))
        push_return_stack(this_pc)

    last_pc = this_pc

# Process support packet #
function process_support (te_inst)

    local stop_here = FALSE

    options = te_inst.options
    if (te_inst.qual_status != no_change)
        start_of_trace = TRUE # Trace ended, so get ready to start again
    if (te_inst.qual_status == ended_upd and inferred_address)
        local previous_address = pc
        inferred_address      = FALSE
        while (TRUE)
            stop_here = next_pc(previous_address)
            if (stop_here)
                return
        return

```

```
# Determine if instruction is a branch, adjust branch count/map,
```

```
#   and return taken status #
```

```
function is_taken_branch (instr)
```

```
    local bool taken = FALSE
```

```
    if (!is_branch(instr))
```

```
        return FALSE
```

```
    if (branches == 0)
```

```
        ERROR: cannot resolve branch
```

```
    else
```

```
        taken = !branch_map[0]
```

```
        branches--
```

```
        branch_map >> 1
```

```
    return taken
```

```
# Determine if instruction is a branch #
```

```
function is_branch (instr)
```

```
    if ((instr.opcode == BEQ)    or
```

```
        (instr.opcode == BNE)    or
```

```
        (instr.opcode == BLT)    or
```

```
        (instr.opcode == BGE)    or
```

```
        (instr.opcode == BLTU)   or
```

```
        (instr.opcode == BGEU)   or
```

```
        (instr.opcode == C.BEQZ) or
```

```
        (instr.opcode == C.BNEZ))
```

```
    return TRUE
```

```
    return FALSE
```

```
# Determine if instruction is an inferable jump #
```

```
function is_inferable_jump (instr)
```

```
    if ((instr.opcode == JAL)    or
```

```
        (instr.opcode == C.JAL) or
```

```
        (instr.opcode == C.J)    or
```

```
        (instr.opcode == JALR and instr.rs1 == 0))
```

```
    return TRUE
```

```
    return FALSE
```

```

# Determine if instruction is an uninferable jump #
function is_uninferable_jump (instr)

    if ((instr.opcode == JALR and instr.rs1 != 0) or
        (instr.opcode == C.JALR)                  or
        (instr.opcode == C.JR))
        return TRUE

    return FALSE

# Determine if instruction is an uninferable discontinuity #
function is_uninferable_discon (instr)

    if (is_uninferable_jump(instr) or
        (instr.opcode == URET)          or
        (instr.opcode == SRET)          or
        (instr.opcode == MRET)          or
        (instr.opcode == DRET)          or
        (instr.opcode == ECALL)         or
        (instr.opcode == EBREAK)        or
        (instr.opcode == C.EBREAK))
        return TRUE

    return FALSE

# Determine if instruction is a sequentially inferable jump #
function is_sequential_jump (instr, prev_addr)

    if (not (is_uninferable_jump(instr) and options.sijump))
        return FALSE

    local prev_instr = get_instr(prev_addr)

    if((prev_instr.opcode == AUIPC) or
        (prev_instr.opcode == LUI)  or
        (prev_instr.opcode == C.LUI))
        return (instr.rs1 == prev_instr.rd)

    return FALSE

```



```

# Find the target of a sequentially inferable jump #
function sequential_jump_target (addr, prev_addr)

    local instr      = get_instr(addr)
    local prev_instr = get_instr(prev_addr)
    local target      = 0

    if (prev_instr.opcode == AUIPC)
        target = prev_addr
    target += prev_instr.imm
    if (instr.opcode == JALR)
        target += instr.imm

    return target

# Determine if instruction is a call #
# - excludes tail calls as they do not push an address onto the return stack
function is_call (instr)

    if ((instr.opcode == JALR and instr.rd == 1) or
        (instr.opcode == C.JALR) or
        (instr.opcode == JAL and instr.rd == 1) or
        (instr.opcode == C.JAL))
        return TRUE

    return FALSE

# Determine if instruction return address can be implicitly inferred #
function is_implicit_return (instr)

    if (options.implicit_return == 0) # Implicit return mode disabled
        return FALSE

    if ((instr.opcode == JALR and instr.rs1 == 1 and instr.rd == 0) or
        (instr.opcode == C.JR and instr.rs1 == 1))
        if (te_inst.irfail != get_previous_bit(te_inst, "irfail") and
            te_inst.irdepth == irstack_depth)
            return FALSE
        return (irstack_depth > 0)

    return FALSE

```

```

# Push address onto return stack #
function push_return_stack (address)

    if (options.implicit_return == 0) # Implicit return mode disabled
        return

    local irstack_depth_max = discovery_response.return_stack_size ?
                                2**discovery_response.return_stack_size :
                                2**discovery_response.call_counter_size
    local instr              = get_instr(address)
    local link               = address

    if (irstack_depth == irstack_depth_max)
        # Delete oldest entry from stack to make room for new entry added below
        irstack_depth--
        for (i = 0; i < irstack_depth; i++)
            return_stack[i] = return_stack[i+1]

    link += instruction_size(instr)

    return_stack[irstack_depth] = link
    irstack_depth++

    return

# Pop address from return stack #
function pop_return_stack ()

    irstack_depth-- # function not called if irstack_depth is 0, so no need
                    # to check for underflow
    local link = return_stack[irstack_depth]

    return link

```

Chapter 10

Example code and packets

In the following examples *ret* is referred to as uninferable, this is only true if implicit-return mode is off

1. Call to `debug_printf()`, from 80001a84, in `main()`:

```
00000000800019e8 <main>:
.....: ...
80001a80: f6d42423          sw a3,-152(s0)
80001a84: ef4ff0ef          jal x1,80001178 <debug_printf>
```

PC: 80001a84 ->80001178

The target of the *jal* is inferable, thus NO `te_inst` packet is sent.

```
0000000080001178 <debug_printf>:
80001178: 7139              addi sp,sp,-64
8000117a: ...
```

2. Return from `debug_printf()`:

```
80001186: ...
80001188: 6121              addi sp,sp,64
8000118a: 8082              ret
```

PC: 8000118a ->80001a88

The target of the *ret* is uninferable, thus a *te_inst* packet IS sent:

te_inst[format=2 (ADDR_ONLY): address=0x80001a88, updiscon=0]

```

80001a88: 00000597      auipc a1,0x0
80001a8c: 65058593      addi a1,a1,1616 # 800020d8 <main+0x6f0>

```

3. exiting from Func_2(), with a final taken branch, followed by a *ret*

```

00000000800010b6 <Func_2>:
.....: ....
800010da: 4781          li a5,0
800010dc: 00a05863      blez a0,800010ec <Func_2+0x36>

```

PC: 800010dc ->800010ec, add branch TAKEN to branch_map, but no packet sent yet.
 branches = 0; branch_map = 0;
 branch_map |= 0 «branches++;

```

800010ec: 60e2          ld ra,24(sp)
800010ee: 6442          ld s0,16(sp)
800010f0: 64a2          ld s1,8(sp)
800010f2: 853e          mv a0,a5
800010f4: 6105          addi sp,sp,32
800010f6: 8082          ret

```

PC: 800010f6 ->80001b8a

The target of the *ret* is uninferable, thus a *te_inst* packet is sent, with ONE branch in the branch_map

te_inst[format=1 (DIFF_DELTA): branches=1, branch_map=0x0, address=0x80001b8a ($\Delta=0xab0$) updiscon=0]

```

00000000800019e8 <main>:
.....: ....
80001b8a: f4442603      lw a2,-188(s0)
80001b8e: ....

```

4. 3 branches, then a function return back to Proc_1()

```

0000000080001100 <Proc_6>:
.....: ....
80001112: c080          sw s0,0(s1)
80001114: 4785          li a5,1
80001116: 02f40463      beq s0,a5,8000113e <Proc_6+0x3e>

```

PC: 80001116 ->8000111a, add branch NOT taken to branch_map, but no packet sent yet.
 branches = 0; branch_map = 0; branch_map |= 1 «branches++;

```
8000111a: c81d          beqz s0,80001150 <Proc_6+0x50>
```

```
PC: 8000111a ->8000111c, add branch NOT taken to branch_map, but no packet sent yet.
branch_map |= 1 «branches++;
```

```
8000111c: 4709          li      a4,2
8000111e: 04e40063     beq     s0,a4,8000115e <Proc_6+0x5e>
```

```
PC: 8000111e ->8000115e, add branch TAKEN to branch_map, but no packet sent yet.
branch_map |= 0 «branches++;
```

```

8000115e: 60e2          ld ra,24(sp)
80001160: 6442          ld s0,16(sp)
80001162: c09c          sw a5,0(s1)
80001164: 64a2          ld s1,8(sp)
80001166: 6105          addi sp,sp,32
80001168: 8082          ret

```

```
00000000800011d6 <Proc_1>:
      .....: ....
80001258: 00093783          ld a5,0(s2)
8000125c: ....
```

PC: 80001168 ->80001258

The target of the *ret* is uninferable, thus a *te_inst* packet is sent, with THREE branches in the branch_map

```
te_inst[ format=1 (DIFF_DELTA): branches=3, branch_map=0x3, address=0x80001258
( $\Delta=0x148$ ), updiscon=0 ]
```

5. A complex example with 2 branches, 2 jal, and a ret

```
00000000800011d6 <Proc_1>:
      .....:    ....
8000121c: 441c          lw a5,8(s0)
8000121e: c795          beqz a5,8000124a <Proc_1+0x74>
```

```
PC: 8000121e ->8000124a, add branch TAKEN to branch_map, but no packet sent yet.
branches = 0; branch_map = 0;
branch_map |= 0 «branches++;
```

```
8000124a: 44c8          lw a0,12(s1)
8000124c: 4799          li a5,6
8000124e: 00c40593      addi a1,s0,12
80001252: c81c          sw a5,16(s0)
80001254: eadff0ef      jal x1,80001100 <Proc_6>
```

PC: 80001254 ->80001100

The target of the *jal* is inferable, thus no *te_inst* packet needs be sent.

```

0000000080001100 <Proc_6>:
80001100: 1101          addi sp,sp,-32
80001102: e822          sd s0,16(sp)
80001104: e426          sd s1,8(sp)
80001106: ec06          sd ra,24(sp)
80001108: 842a          mv s0,a0
8000110a: 84ae          mv s1,a1
8000110c: fedff0ef      jal x1,800010f8 <Func_3>

```

PC: 8000110c ->800010f8

The target of the *jal* is inferable, thus no *te_inst* packet needs to be sent.

```

00000000800010f8 <Func_3>:
800010f8: 1579          addi a0,a0,-2
800010fa: 00153513      seqz a0,a0
800010fe: 8082          ret

```

PC: 800010fe ->80001110

The target of the *ret* is uninferable, thus a *te_inst* packet will be sent shortly.

```

0000000080001100 <Proc_6>:
.....: ....
80001110: c115          beqz a0,80001134 <Proc_6+0x34>
80001112: ....

```

PC: 80001110 ->80001112, add branch NOT TAKEN to branch_map.

branch_map |= 1 «branches++;

te_inst[format=1 (DIFF_DELTA): branches=2, branch_map=0x2, address=0x80001110
($\Delta=0xfffffffffffef4$), updiscon=1]