








J8
PLUS AUDIO OUT





S
R CPO
T CPO




Pass-through:
LUM (B&W video)
CPC PLUS audio

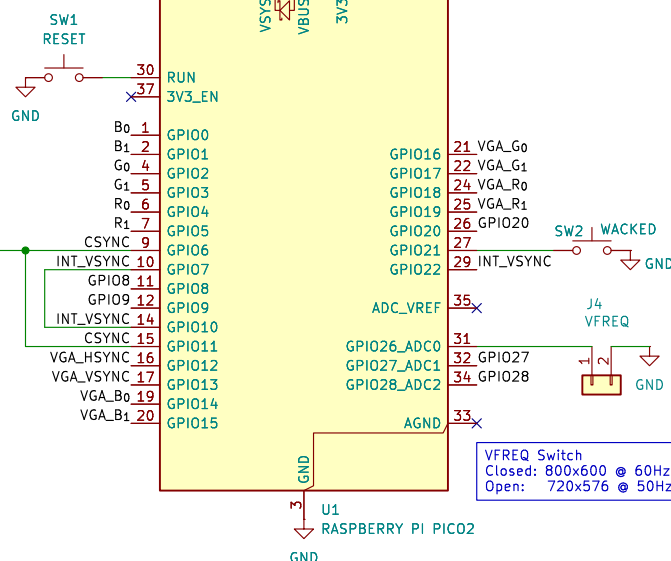

VFREQ Switch
Closed: 800x600 @ 60Hz
Open: 720x576 @ 50Hz

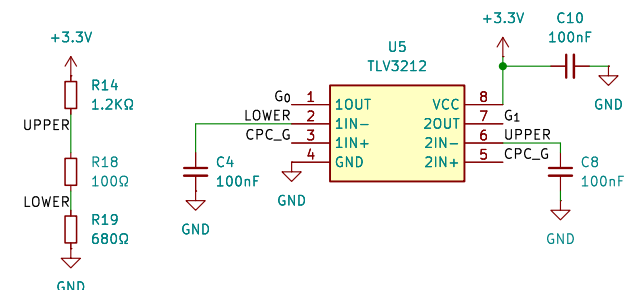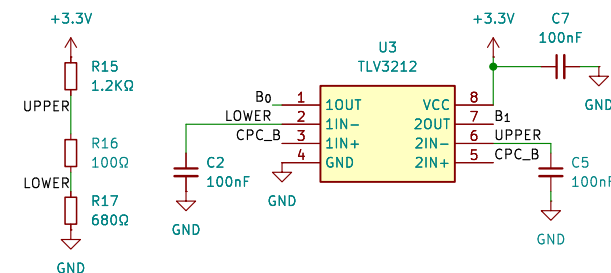


Duplicated resistor ladders to simplify PCB routing

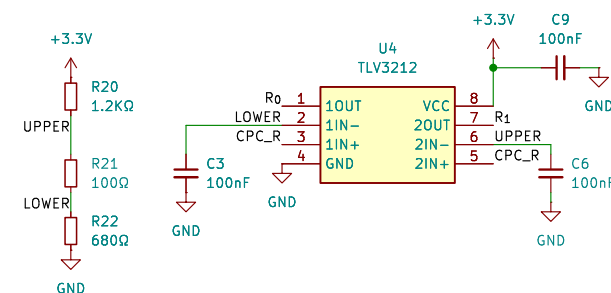

J3	KOBICONN 163-179PH-EX 2.1MM DC POWER JACK OR SIMILAR
J8	SAME SKY SJ3-35083A-TR 3.5MM STEREO JACK FOR CPC PLUS AUDIO
J1	SAME SKY SDJ-60J 6-PIN DIN FOR CPC VIDEO
J7	SAME SKY SDJ-80J 8-PIN DIN FOR CPC PLUS VIDEO
J4	2-PIN 2.54MM HEADER + STRAP
J6	AMPHENOL 177HDE15SD1CH4RHNVA DE15 VGA OR SIMILAR
J2	KOBICONN 156-0099-E RCA PHONO JACK OR SIMILAR FOR LUM
J5	7-PIN 2.54MM HEADER (SPARE GPIO PORTS)
C	CERAMIC CAPACITOR P2.5MM
R	RESISTOR D1.6MM
SW1	TACTILE SWITCH 6MM
SW2	TACTILE SWITCH 6MM (SPARE SWITCH)
U1	RASPBERRY PI PICO2
U2	NEXPERIA 74LVC125AD-Q100J OR SIMILAR (SOIC-20)
U3	TEXAS INSTRUMENTS TLV3202AID/TLV3212DGKR OR SIMILAR (SOIC-8)
U4	TEXAS INSTRUMENTS TLV3202AID/TLV3212DGKR OR SIMILAR (SOIC-8)
U5	TEXAS INSTRUMENTS TLV3202AID/TLV3212DGKR OR SIMILAR (SOIC-8)

NOT YET TESTED

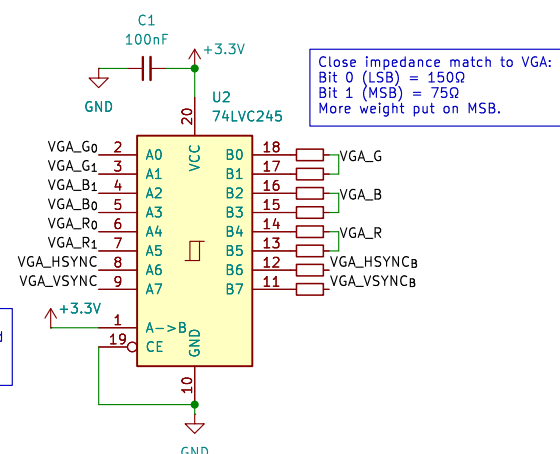

Close impedance match to VGA:
 Bit 0 (LSB) = 150Ω
 Bit 1 (MSB) = 75Ω
 More weight put on MSB.

Pico output signals buffered before VGA output stage

