


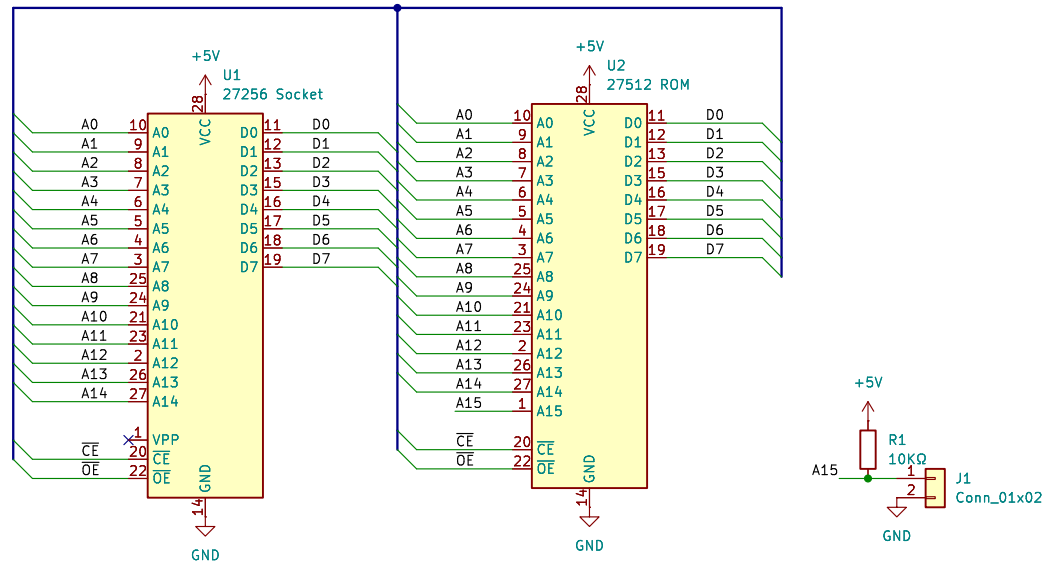

A15 open = BASIC 1.1
A15 closed = BASIC 1.0
(Of course, assuming ROM is burned with 464
firmware/BASIC 1.0 in the low bank and 6128
firmware/BASIC 1.1 in the high bank)

Install switchable BASIC 1.0/1.1
(based on my 27256-to-27512 design)

Brett Hallen

Sheet: /
File: CPC464_Dual_ROM.kicad_sch

Title: Amstrad CPC464 Dual ROM

Size: A4 Date: 20/MAY/2026

KiCad E.D.A. 9.0.9

Rev: A

Id: 1/1