

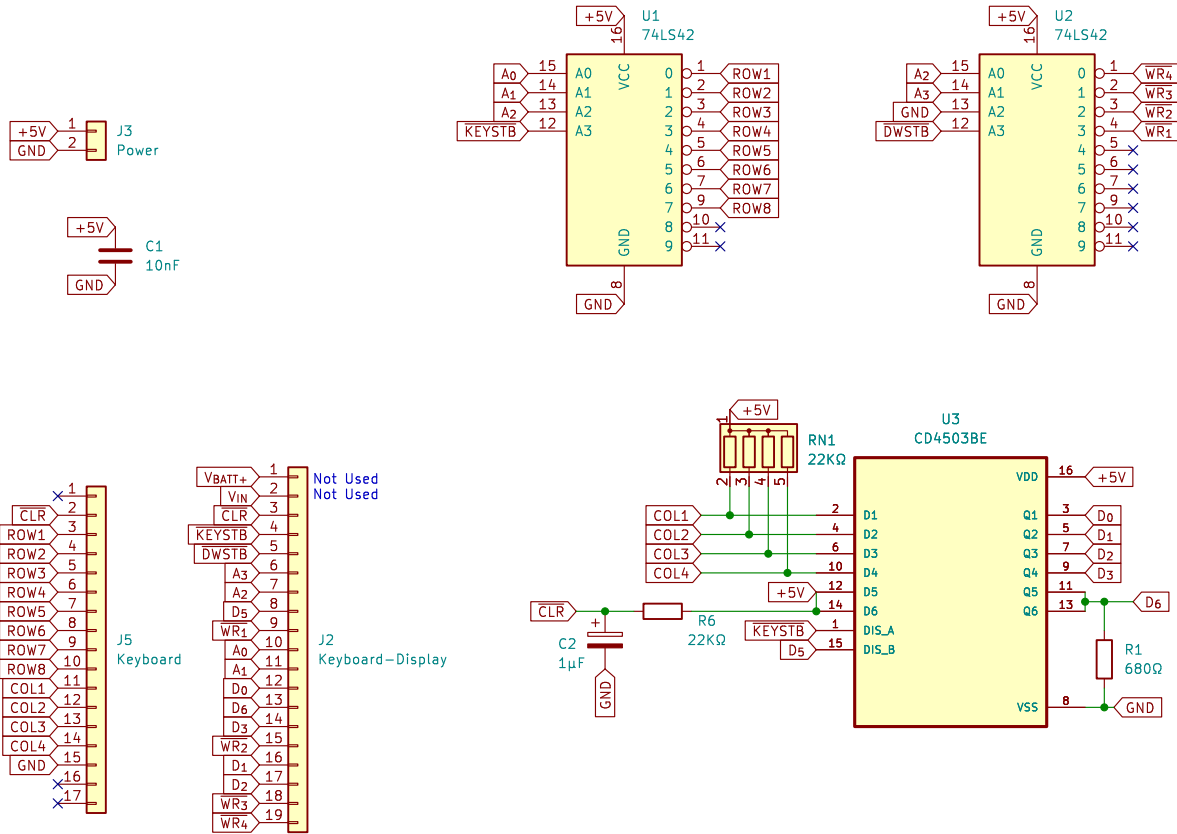


Keyboard Interface
Power is provided from Display Board via Power jumper

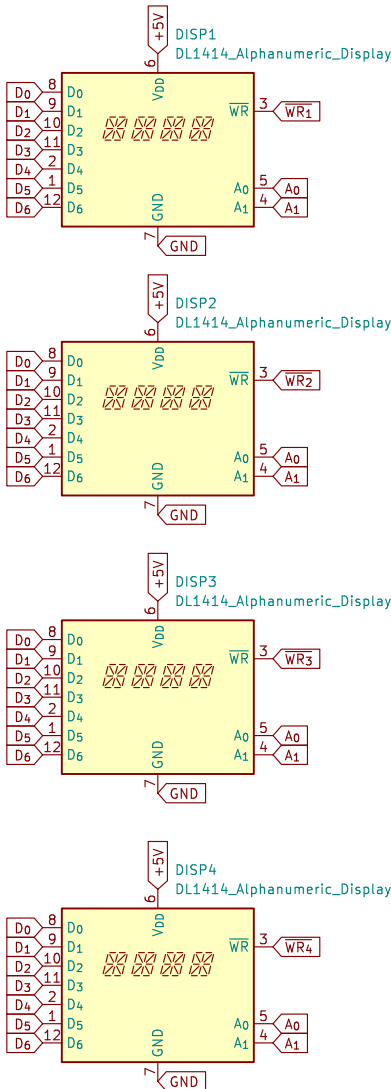


KEYSTB = keyboard strobe
DWSTB = display strobe
U1 handles the keyboard decoding
U2 handles the display module decoding
U3 is a non-inverting buffer
The DL-1414 modules require a 7-bit ASCII code to display characters between 0x20 and 0x5F ... so not really sure how D6 is magically handled ... yet.


Display Board
Power jumper supplies power to the Keyboard Interface board
DISP1 is the leftmost display module
DISP2 is the rightmost display module
Cartridge connector is "Teledyne Kinetics S 426U016"



Power Input (on Display Board)
Vout and +5V must be bridged in the cartridge to enable the LK-3000 to power on.
Battery is four AA NiCd cells connected in series.
VIN is the input power from the PSU.
Vout is the regulated +5V used by the system.
VBATT is the battery power source (charging/discharging).

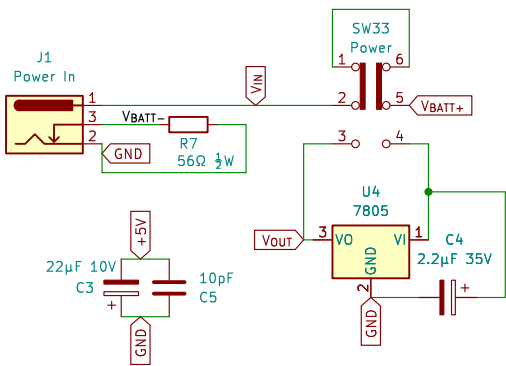

Keyboard Matrix

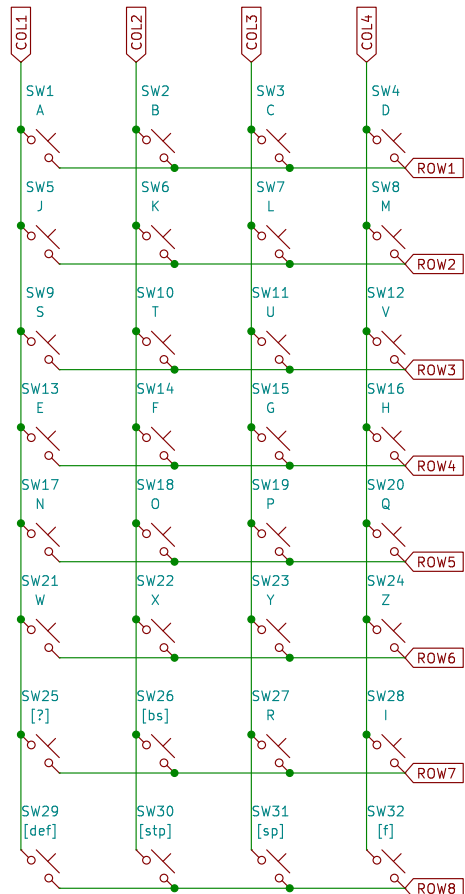

www.youtube.com/@Brfff

Brett Hallen

Sheet: /
File: LK3000_Schematics.kicad_sch

Title: Nixdorf LK-3000 Personal Computer

Size: A3 Date: 5/OCT/2025

KiCad E.D.A. 9.0.4

Rev: B

Id: 1/1