

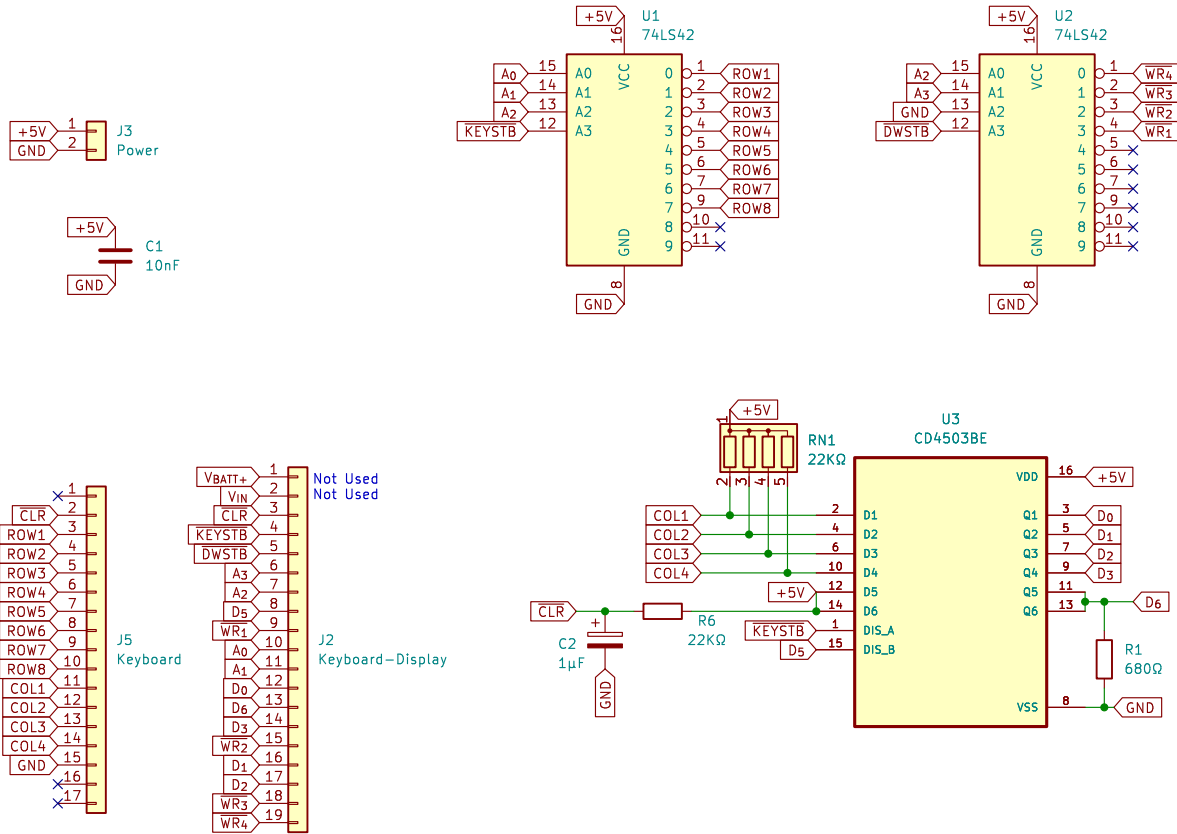
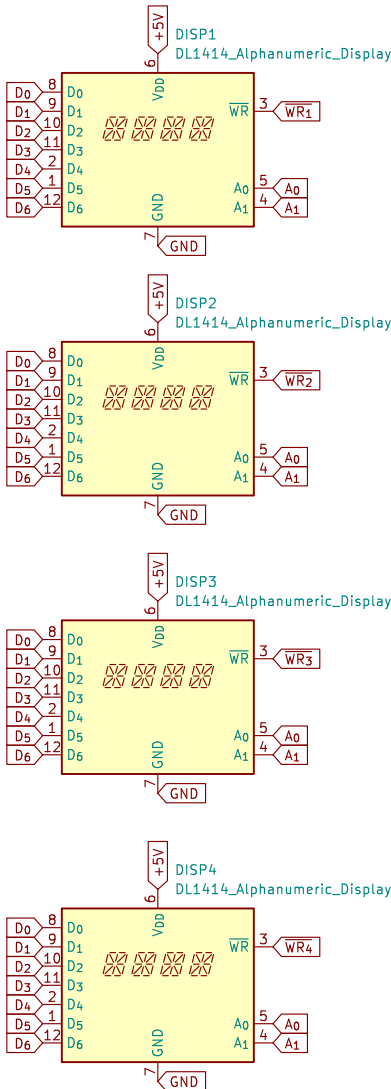


Keyboard Interface  
Power is provided from Display Board via Power jumper




KEYSTB = keyboard strobe  
DWSTB = display strobe  
U1 handles the keyboard decoding  
U2 handles the display module decoding  
U3 is a non-inverting buffer  
The DL-1414 modules require a 7-bit ASCII code to display characters between 0x20 and 0x5F ... so not really sure how D6 is magically handled ... yet.


Display Board  
Power jumper supplies power to the Keyboard Interface board  
DISP1 is the leftmost display module  
DISP2 is the rightmost display module  
Cartridge connector is "Teledyne Kinetics S 426U016"



Power Input (on Display Board)  
Vout and +5V must be bridged in the cartridge to enable the LK-3000 to power on.  
Battery is four AA NiCd cells connected in series.  
VIN is the input power from the PSU.  
Vout is the regulated +5V used by the system.  
VBATT is the battery power source (charging/discharging).

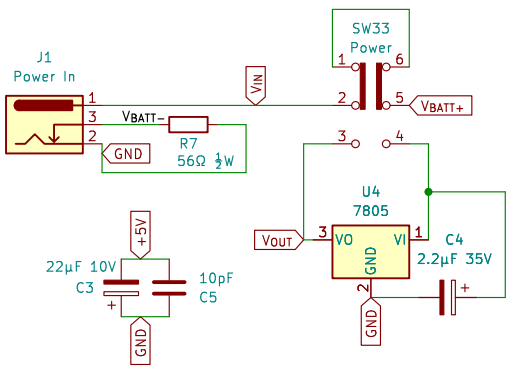

Keyboard Matrix

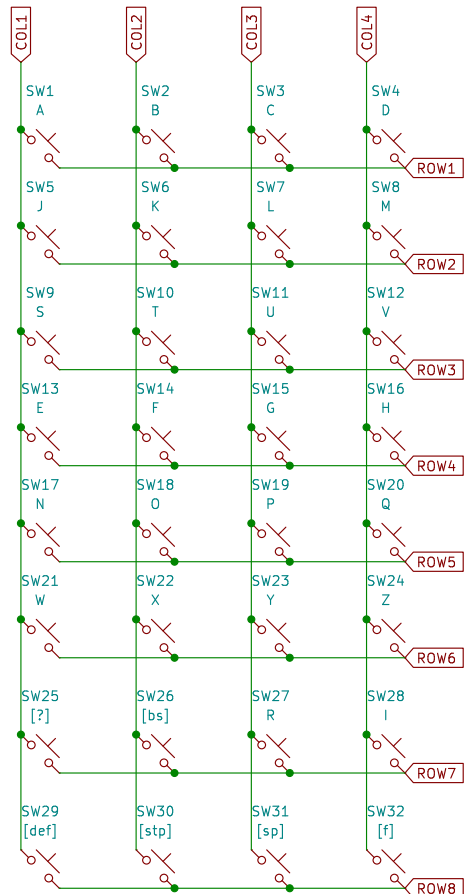

www.youtube.com/@Brfff

Brett Hallen

Sheet: /  
File: LK3000\_Schematics.kicad\_sch

Title: Nixdorf LK-3000 Personal Computer

Size: A3 Date: 5/OCT/2025

KiCad E.D.A. 9.0.4

Rev: B

Id: 1/1