

Static Route - CPT

Description:


This will cover how to configure the routing table of a router. Configuring a routing table makes it so that 2 different networks can communicate with each other, this is mostly used when an ISP is giving internet access to businesses, homes and other organizations.

Requirements:

2X PT-Empty (Any router that can support Serial cable module)
2X 2960 Switch
2X PC
2X Server

Topology:

Set up your network like this

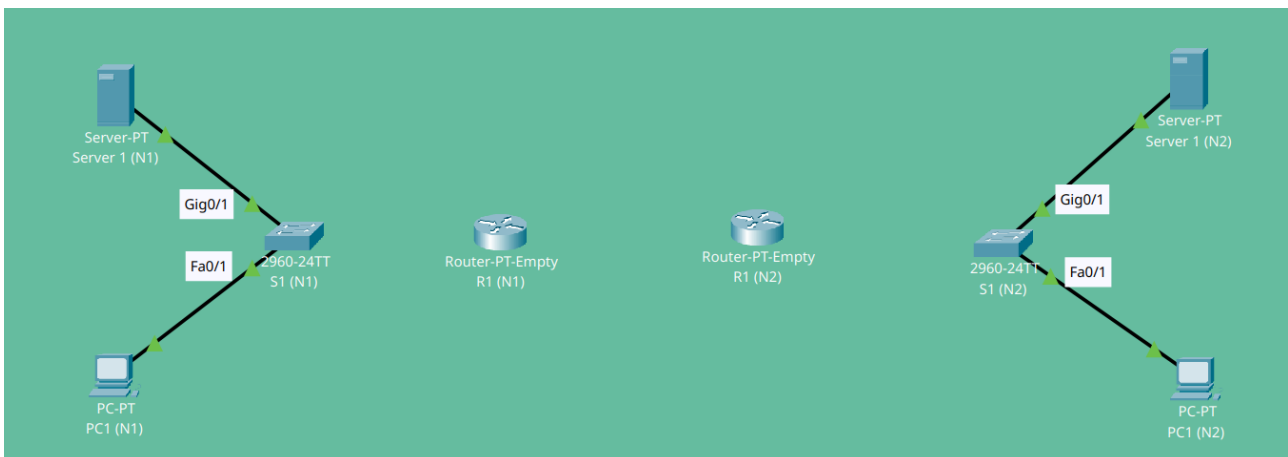


Do this to both routers, Turn them off and add these 2 modules
1.NM-1S Module, 2.NM-1CGE. Then turn them on, this allows for the router use Serial and Gigabit Ethernet connections.




Static Route - CPT

Now lets use the right cables to connect all the deives

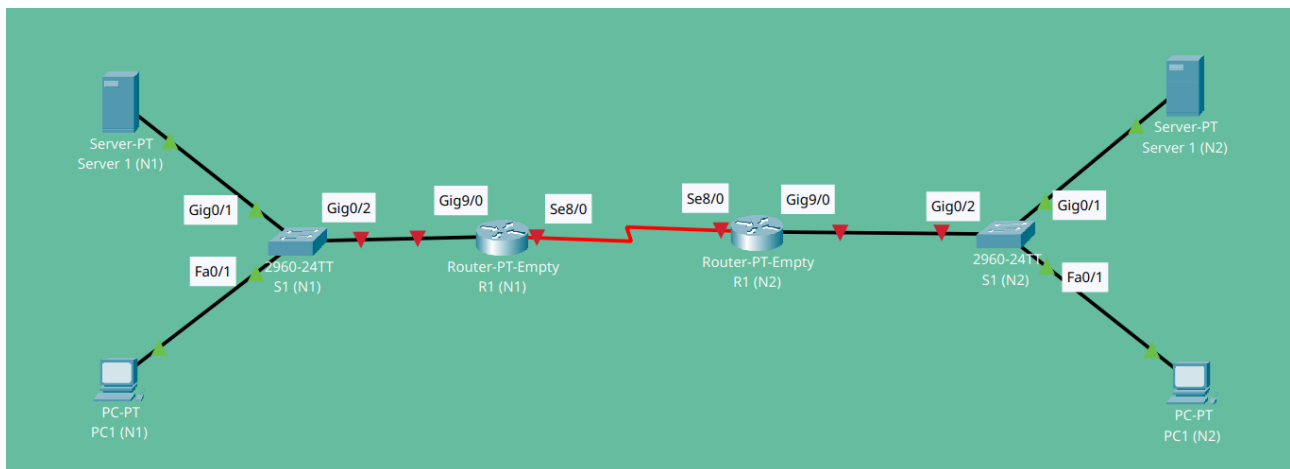

Now I will go on both servers and setup a a DHCP service and a HTTP service to test that the static route works atfer we configure the route. For this to work we need to set dynamic configurations on Both PC's so go on the PC and set it to DHCP.

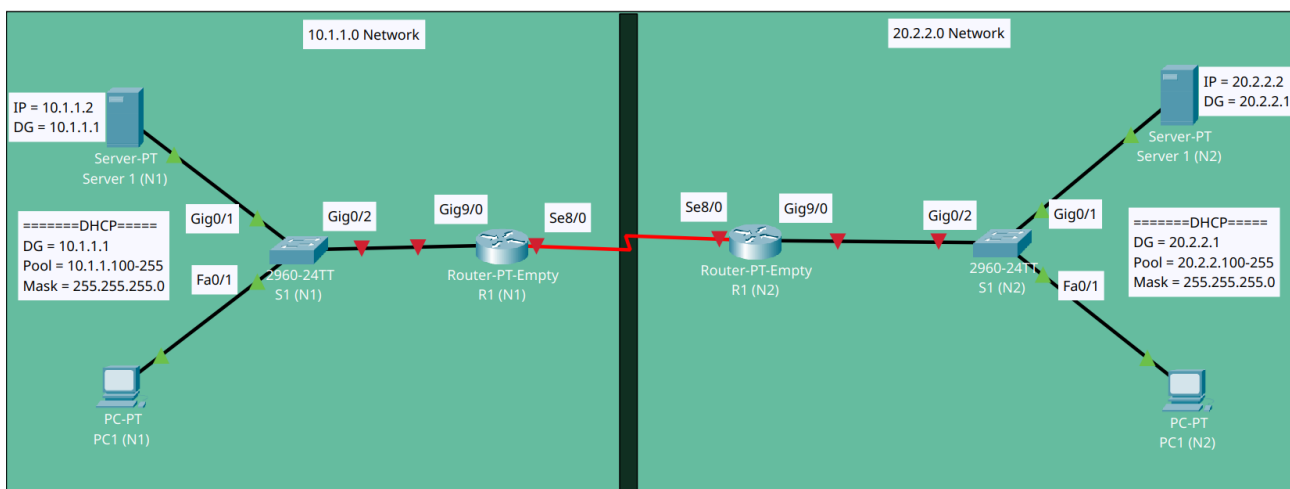

If you want a custom message for the HTTP service, I edited the index.html file with the format

```
<html>
<q> CUSTOM TEXT
</html>
```

Static Route - CPT

Router Configuration


On R1(N1) I will enter the CLI Command line to assign IP's on ports, create a static route, and save changes to startup.

Router R1(N1)

Command	Description
>en	Enter configuration state
#config t	
#int gig9/0	
#ip addr 10.1.1.1 255.255.255.0	Assign IP to Gig9/0
#no sh	
#exit	
#int se8/0	
#ip addr 10.10.10.1 255.255.255.0	Assign IP to Se8/0
#no sh	
#exit	
#ip route 20.2.2.0 255.255.255.0 20.20.20.1	Static route and next hop
#ip route 20.2.2.0 255.255.255.0 se8/0	And port
#exit	
#wri mem	Save Changes to boot

Router R1(N2)

Command	Description
>en	Enter configuration state
#config t	
#int gig9/0	
#ip addr 20.2.2.1 255.255.255.0	Assign IP to Gig9/0
#no sh	
#exit	
#int se8/0	
#ip addr 20.20.20.1 255.255.255.0	Assign IP to se8/0
#no sh	
#exit	
#ip route 10.1.1.0 255.255.255.0 10.10.10.1	Static route and next hop
#ip route 10.1.1.0 255.255.255.0 se8/0	And port
#exit	
#wri mem	Save changes to boot

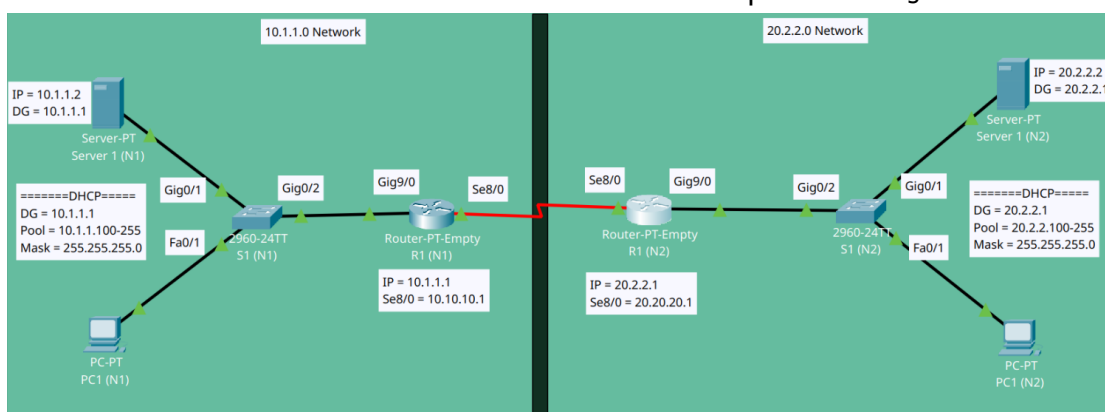

Static Route - CPT

Testing

Now I am on the web browser of both PC's on PC1(N1) I will type 20.2.2.2 and on PC1(N2) I will type 10.1.1.2 in the URL bar to pull up the websites. And now

