
ESP32 RFID Terminal · Wiring Diagram

Board: ESP32 DevKit V1 (DOIT, 30 pins) · top view, USB at the bottom
All signal pins are taken from config.h and TFT_eSPI/User_Setup.h

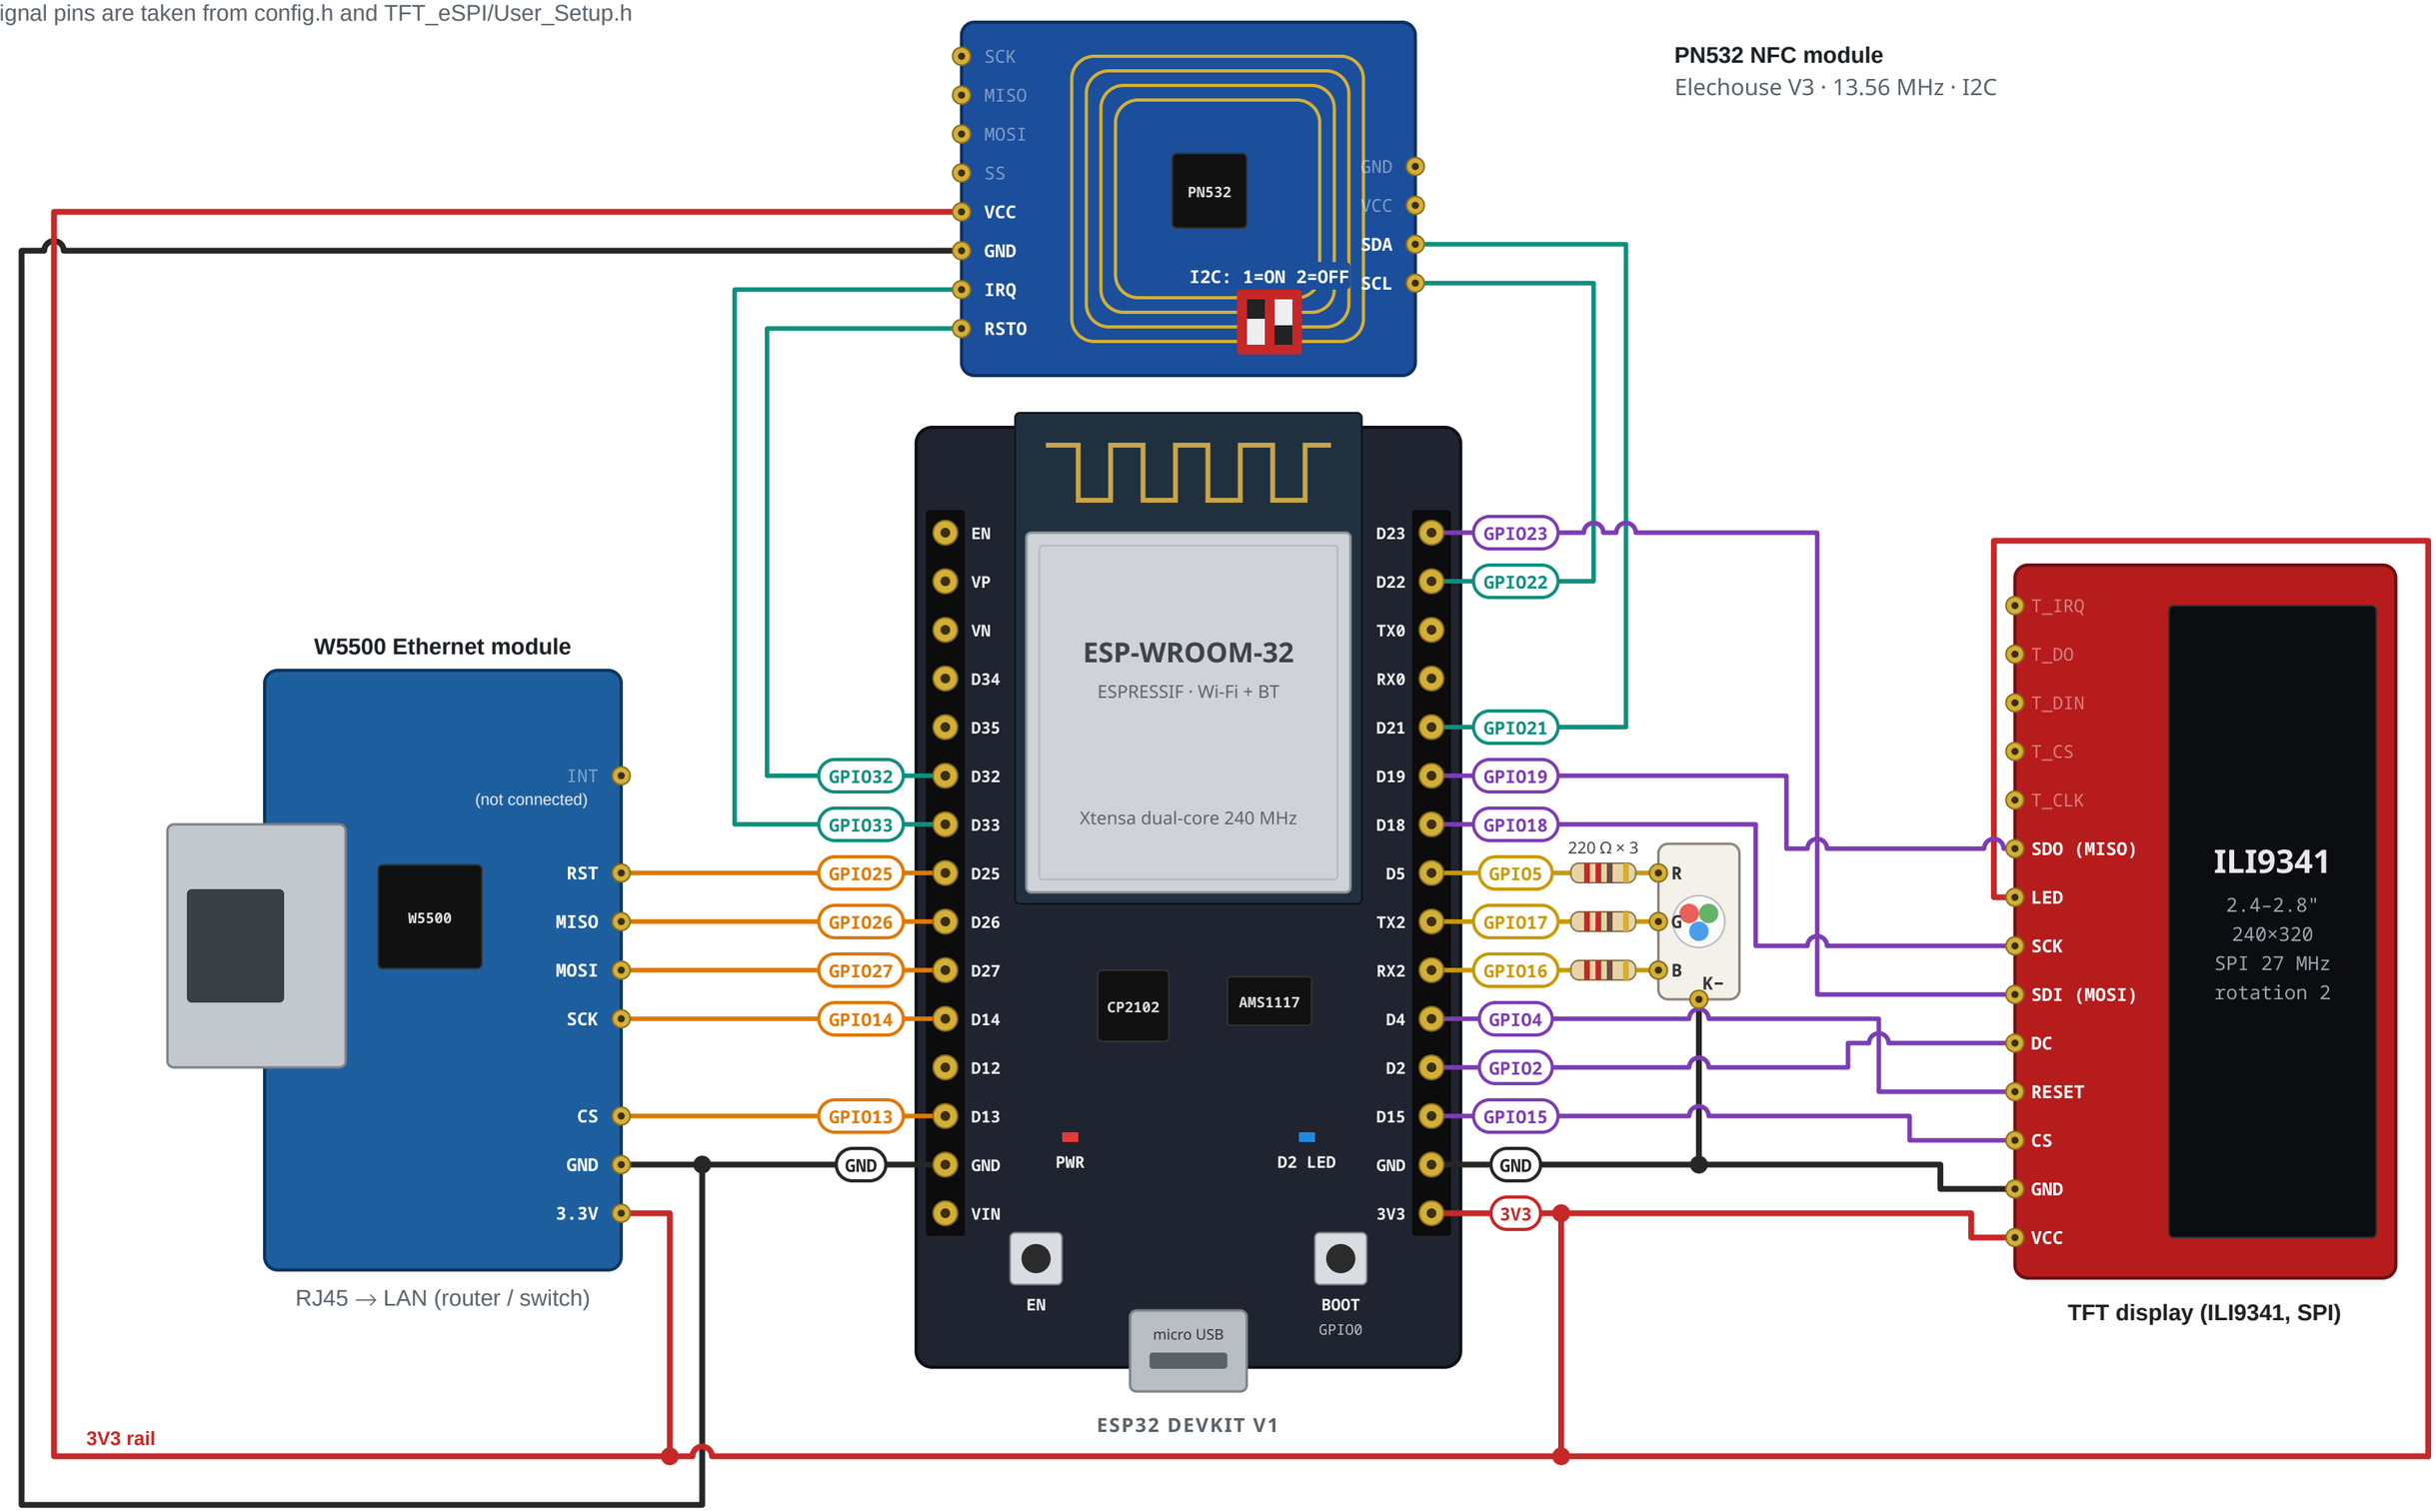

Wires: PN532 · I2C + IRQ/RST · W5500 · SPI · TFT · SPI · RGB LED · 3.3 V · GND

Arc = wires cross without connecting. Dot = junction. Grey pin = not used.