

USB-C, ESD, USB series resistors

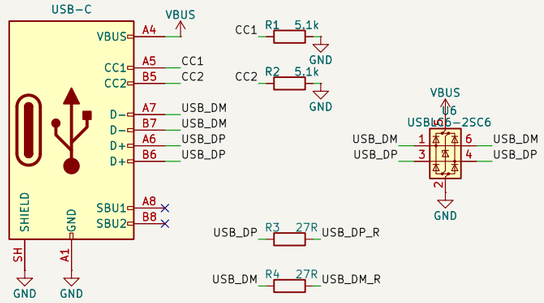


LiPo charger + power path (BQ24074)

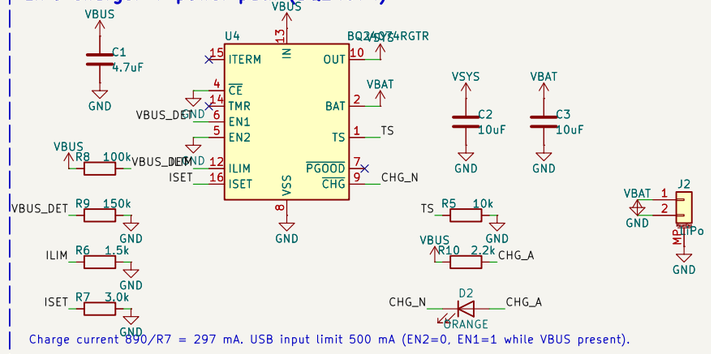

Charge current 890/R7 = 297 mA. USB input limit 500 mA (EN2=0, EN1=1 while VBUS present).

TS tied to 10k (no NTC in a 2-wire pack). Safety timers and 10% termination at defaults (TMR, ITERM open).


3V3 LDO, battery sense

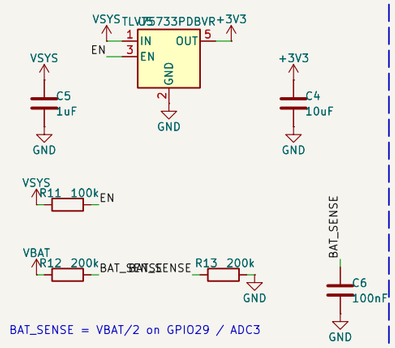

BAT_SENSE = VBAT/2 on GPIO29 / ADC3


Wi-Fi / BLE (Raspberry Pi RM2)

gSPI wired like Pico 2 W: pins: ON=GP16 CS=GP17 DATA=GP18 CLK=GP19

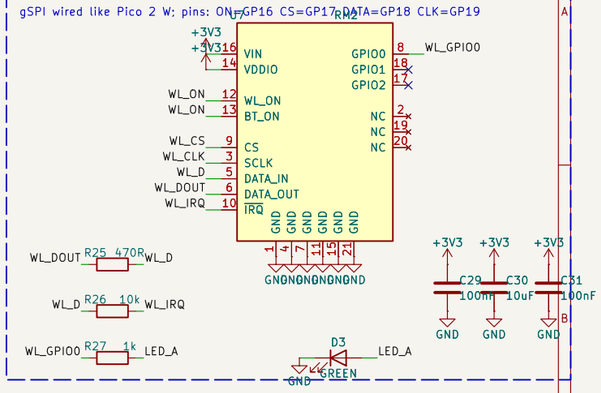

RP2350A, core SMPS, crystal, reset, SWD


Core supply: on-chip SMPS, L1 = AOTA-B201610S3R3-101-T (polarised, dot to +1V1)

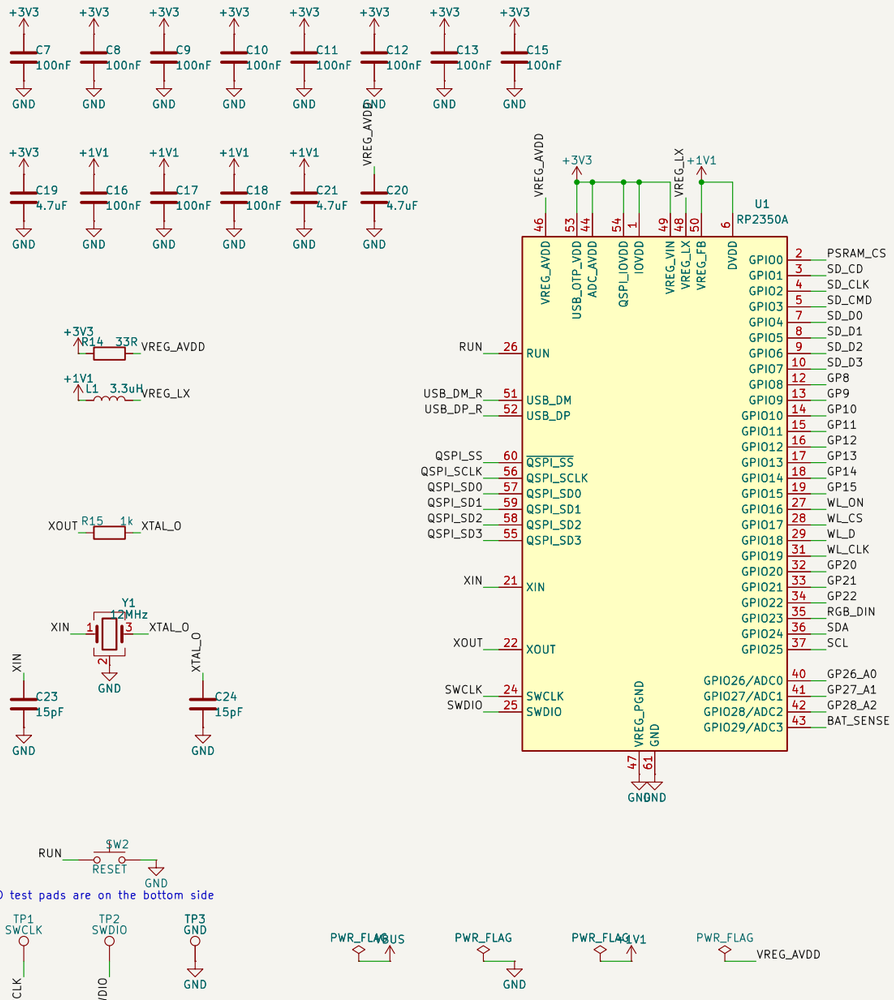


SWD test pads are on the bottom side

QSPI flash (XIP CS0) + PSRAM (XIP CS1 = GPIO0), BOOT

GPIO0 = XIP_CS1 (PSRAM), pulled up by R19

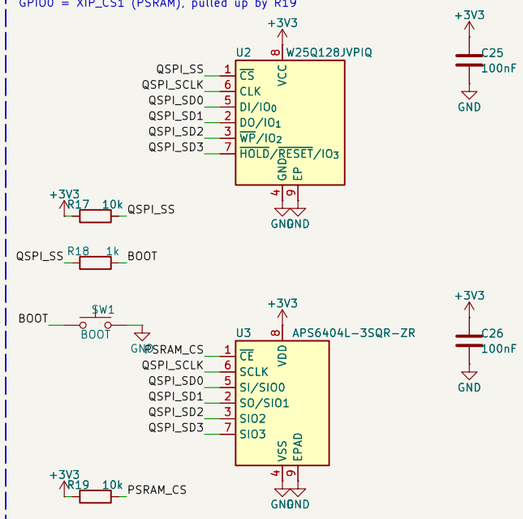


microSD (SDIO 4-bit / SPI0), pull-ups: RP2350 internal

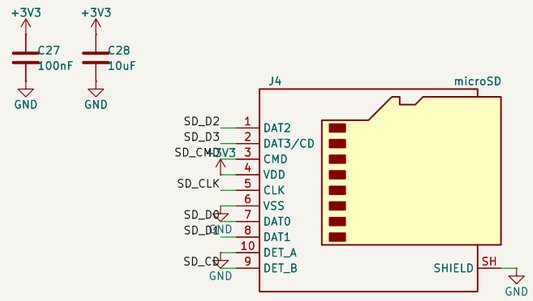

CLK=GP2 CMD=GP3 D0..D3=GP4..GP7 CD=GP1 (switch to GND)

Qwiic / STEMMA QT, RGB LED, headers (J5/J6 not populated)

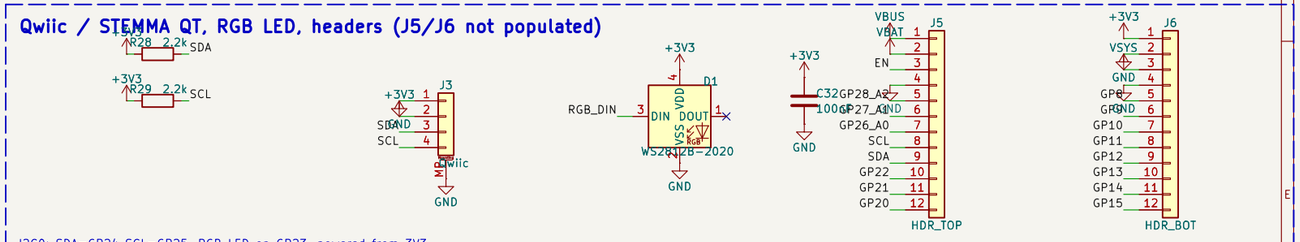

I2C0: SDA=GP24 SCL=GP25. RGB LED on GP23, powered from 3V3.

Generated from tools/design.py

RP2350A + 16MB flash + 8MB PSRAM + RM2 radio + LiPo charger + microSD + Qwiic

Sheet: /

File: rp2350-devboard.kicad_sch

Title: RP2350 Wi-Fi/BLE dev board

Size: A3	Date: 2026-11-10	**Rev: A**
KiCad E.D.A. 10.99.0-unknown		Id: 1/1