# onebee™

WX-1512 Wireless Extender

1.Introduction

WX-1512 is mainly for transfer wireless signal when distance between detectors is too long or serious obstruct between detectors, WX-1512 can magnify signal and send to control panel. Detectors can be connected with WX-1512 by learning code. WX-1512 can transfer at most 60 detectors signal, it compose with detector to one to one mode to avoid interference by learning code. WX-1512 uses advanced multilevel transfer method, at most transfer 15 levels, 150m far distance. It with tamper alarm function, and with particular address code of itself. When need multilevel transferring, WX-1512 will be used as a wireless detector which adopts data base commute among levels, the equipment above 0 level does not need to learn code, it can transfer all wireless address data including itself address code to goal transmitter.

Power
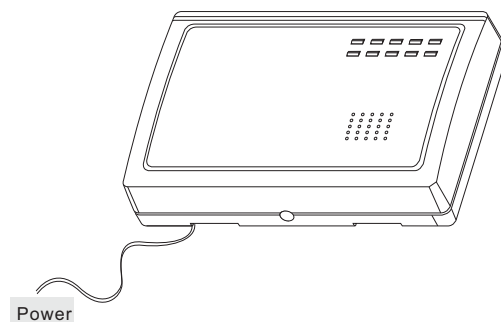
2.Technical parameter

Input Voltage AC 16.5V/DC 15~18V

Static state current :12mA

Wireless transmitting current : 22mA

Wireless receiving distance 30m open area

Wireless transmitting distance 30m open area

Appearance L*W*H 167*112*40mm

3.Installation and connecting

A. As below fig. open the upper cover with screwdriver on the 12 clips, the inner structure can be seen.

B. As below fig.: Connect battery to the interface on the PCB, the switch is for control power of battery, open is for connecting back up battery.

Power
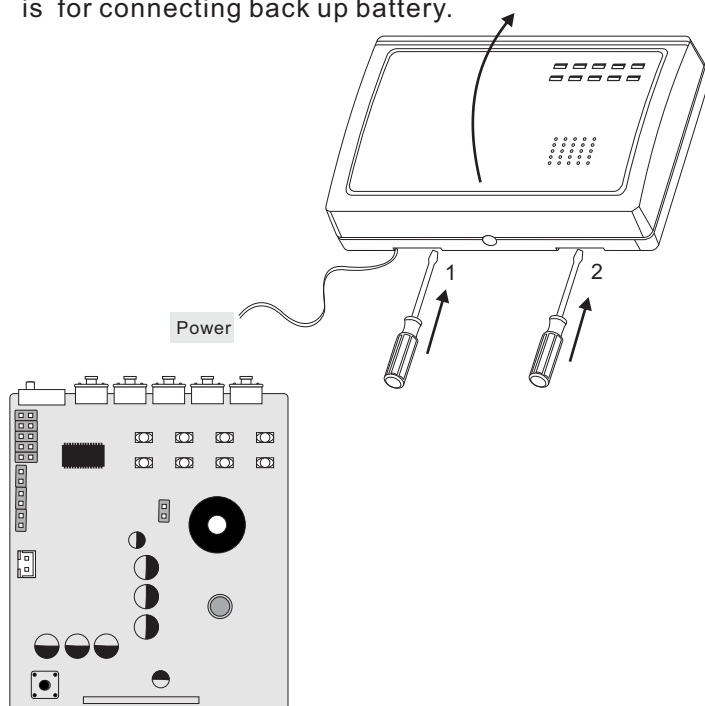
4. Learning code setting

As below fig., Press SAVE/TX button, then trigger wireless detector, after 1 second when LED-RF and LED-FS light together, release SAVE/TX, learning code over; repeat such operation for other wireless item, the item which have been learned will not be learned any more.

SAVE/TX button

LED-RF
LED-FS
blink 1 secone
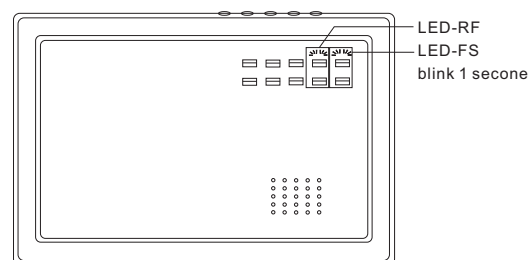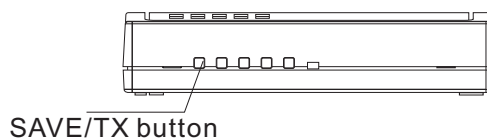
Note when wireless learning code, press SAVE/TX, if there are some other wireless items sending same format data at the same time, WX-1512   will also learn it, so we suggest shorten learning code period as fast as you can.

5.Delete detector code

Press CLR/RX and MOV switch simultaneously, trigger TAMP switch, LED-RF and LED-FS light up at the same time after alternate flash, release CLR/RX and MOV switch, then trigger TAMP switch again, code will be deleted.

CLR/RX

MOV

TAMP switch

LED-RF
LED-FS
light up at the same time after alternate flash
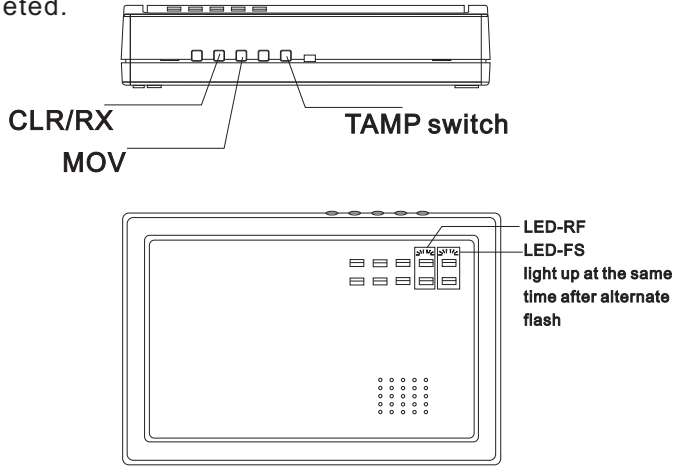
6. Level setting

Setting transmitting level by 4-digit address jump setting, at most can set 0-15 level, any transmitting system must has one 0 level transmitter, and during data base commuting, must one level to one level from 0 level, can not transmit jump one level,(eg.in 3 level transmitting system, must set 0,1,2 three levels), otherwise, it will not get the alarm signal from wireless equipment.

SAVE

0 1 2 3
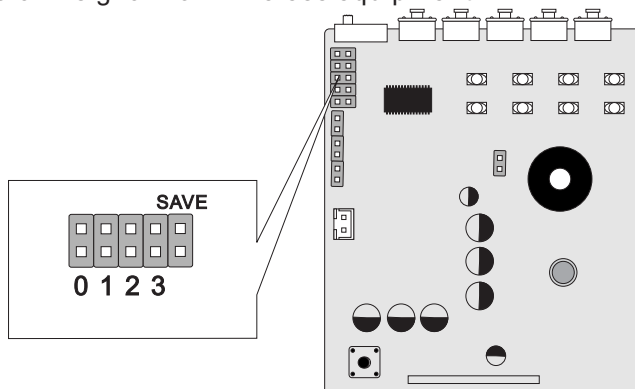
Setting method short-circuit is ON open-circuit is OFF add the four numbers of the four switches correspond, the result is the level No. Set the numbers needed to the ON position. As below fig. Showing, it is the level 10..

2+8=10

1 2 4 8

0 1 2 3

7.Data base connection(need open cover to set level)

A. Keep pressing SAVE/TX and MOV buttons on the transmitter need to set as educe data base, and then press TAMP button, LED-RF and LED-FS light up after alternate flashing, release SAVE/TX and MOV buttons, LED-TX light, LED-RF, LED-FS alternate flashing, transmitter enter educe data base mode, in order to avoid false operation, before LED-RF and LED-FS light simultaneity, release any one of SAVE/TX or MOV will cancel operation.

SAVE/TX

MOV

TAMP

LED-RX
LED-TX
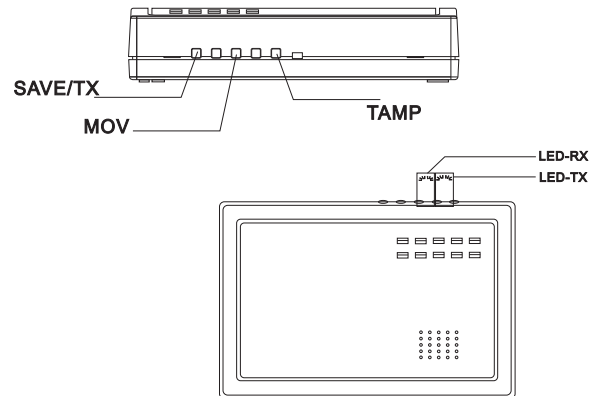
B. Keep pressing CLR-RX and MOV buttons on the transmitter need to set as entry data base, and then press TAMP button, LED-RF and LED-FS light up after alternate flashing, release CLR/RX and MOV buttons, LED-TX light, LED-RF flashing, transmitter enter entry data base mode, in order to avoid false operation, before LED-RF and LED-FS light simultaneity, release any one of CLR/RX or MOV will cancel operation.

CLR/RX

MOV

TAMP

LED-RX
LED-TX
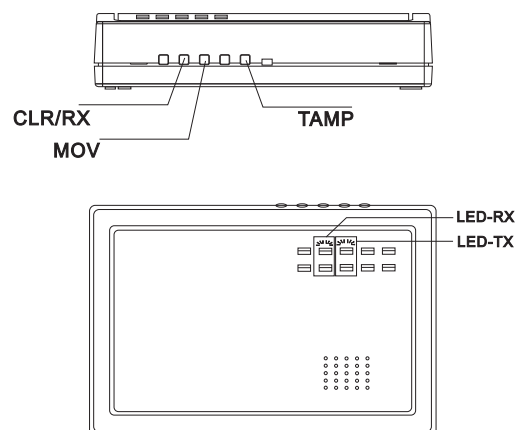
C. The LED-RF,LED-FS on the entry transmitter alternate flash after 1 second, that is to say data commute end. Then, you need trigger TAMP button on the entry, educe transmitters to exit.