GATE ASSIGNMENT 1

Amulya Tallamraju
AI20BTECH11003

Download all python codes from

https://github.com/AmulyaTallamraju/EE3900/blob/main/GATE_Assignment−2/codes/GATE_Assignment−2.py

and latex-tikz codes from

https://github.com/AmulyaTallamraju/EE3900/blob/main/GATE_Assignment−2/GATE_Assignment−2.tex

1 GATE EC 2010 Q.15

Two discrete time systems with impulse responses $h_1[n] = \delta[n-1]$ and $h_2[n] = \delta[n-2]$ are connected in cascade. The overall impulse response of the cascaded system is

2 Solution

When connecting LTI systems in cascade the impulse response of the overall system can be found using convolution . Two LTI systems with impulse responses $h_1(n)$ and $h_2(n)$ connected in cascade have as an overall impulse response

$$h(n) = [h_1 * h_2](n) = [h_2 * h_1](n) \tag{2.0.1}$$

Hence,

$$h[n] = h_1(n) * h_2(n) \tag{2.0.2}$$

$$= \sum_{m=-\infty}^{\infty} \delta[m-1]\delta[n-2-m] \tag{2.0.3}$$

$$= \delta[n-3] \tag{2.0.4}$$

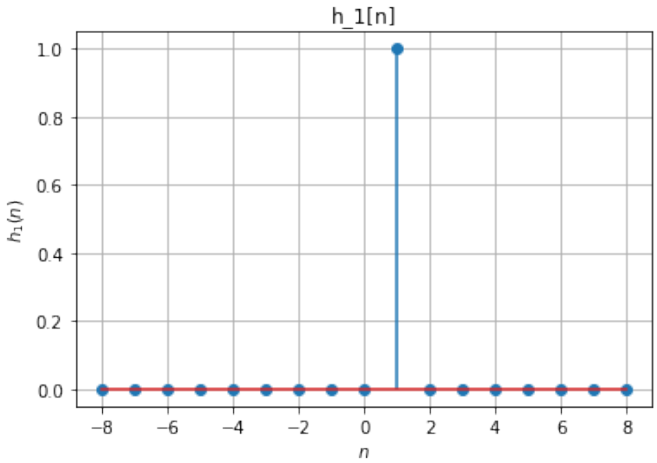

Fig. 0: Plot of $h_1[n]$

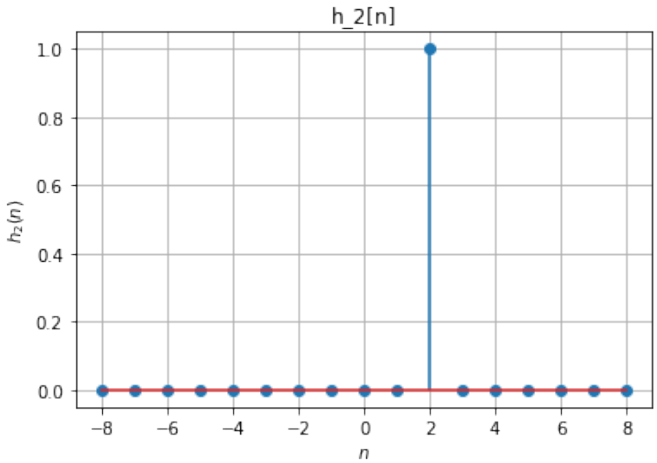

Fig. 0: Plot of $h_2[n]$

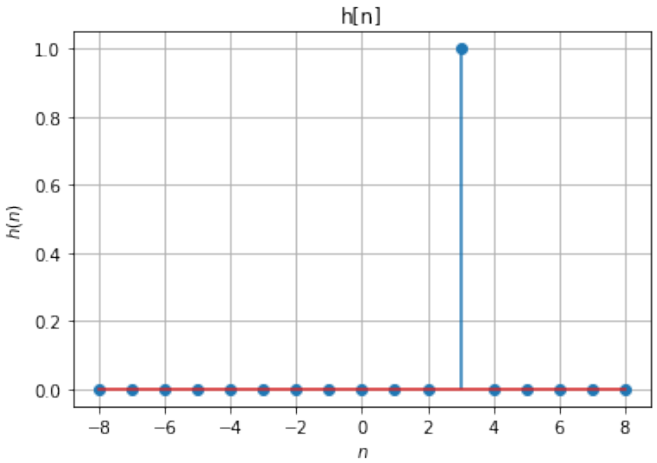

Fig. 0: Plot of $h[n]$