
EEE / FINGERPRINT TERMINAL

ROUNDED RECTANGULAR ENCLOSURE / ORTHOGRAPHIC VIEWS

REV B | 07 OCT 2026


APPROXIMATE - VERIFY HARDWARE FIT

TOP VIEW

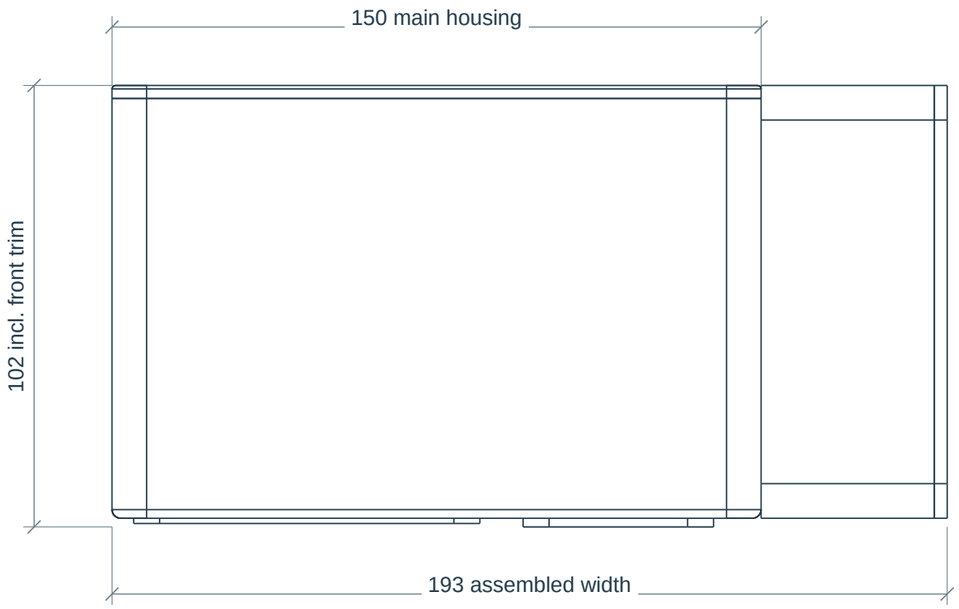

FINGERPRINT TERMINAL / RECTANGULAR CAD DRAFT B

Flat front | 150 x 100 x 100 main housing | 193 x 102 x 100 overall with panels

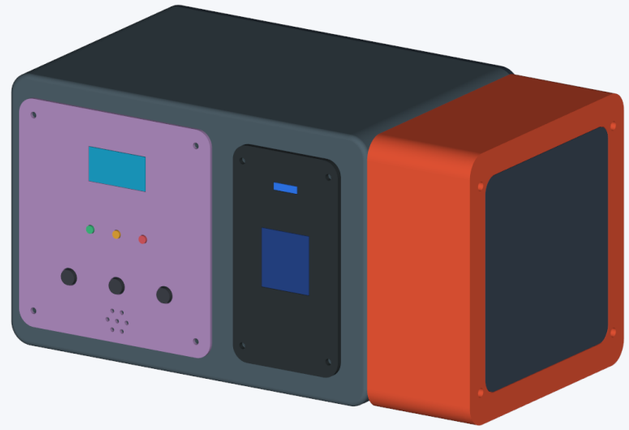


Approximate layout. Reference proportions adapted for three buttons; hardware fit requires measurement.

Body front and rear are parallel; front slope is 0 deg.


Main housing nominal 150 W x 100 D x 100 H (rear lid included).

Battery pod 40 wide plus 3-thick outer cover; front panel projects 2.

FRONT VIEW / FLAT FACE

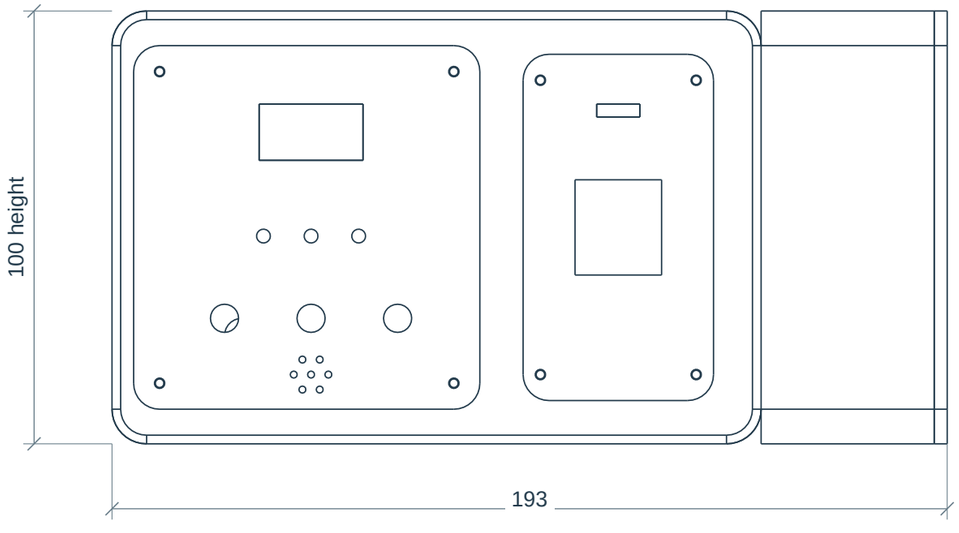

RIGHT VIEW / BATTERY COVER

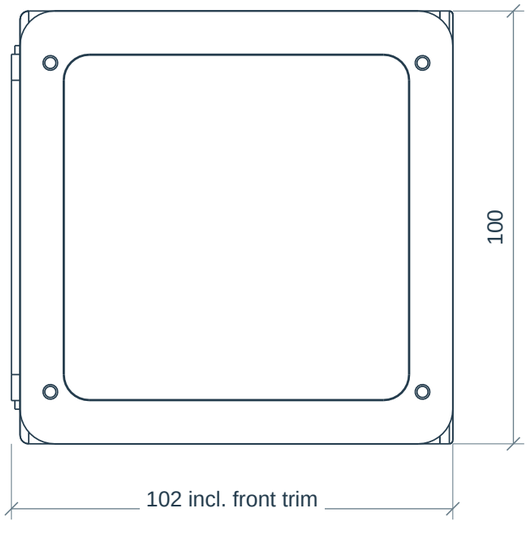

Units: mm | Views 1:1.417; preview NTS | A3 landscape | Use written dimensions; print at 100%.


EEE / FINGERPRINT TERMINAL

FRONT CUTOUTS / PANEL LAYOUT

REV B | 07 OCT 2026

APPROXIMATE - VERIFY HARDWARE FIT

BODY FRONT / TRIM PANELS OMITTED

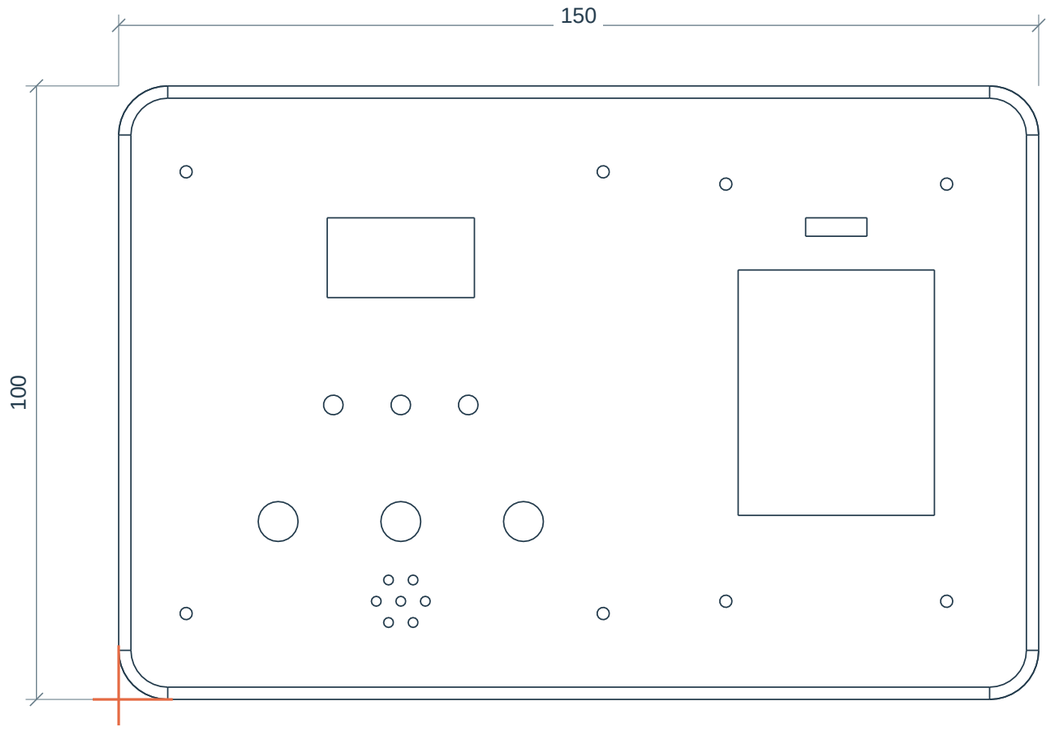

DATUM: theoretical lower-left body corner

u -> right; v -> up; x=u-75, z=v

Feature	Center u, v	Opening / pattern
OLED window	46, 72	24 x 13
Sensor body cutout	117, 50	32 x 40
Sensor indicator	117, 77	10 x 3
Adapter pilots	99/135, 16/84	4 x DIA 2.0
Buttons (3)	26/46/66, 29	3 x DIA 6.5
LEDs (3)	35/46/57, 48	3 x DIA 3.2
Buzzer grille	46, 16	7 x DIA 1.6; 6 on DIA 8 PCD
Control pilots	11/79, 14/86	4 x DIA 2.0

Left control panel: 80 W x 84 H x 1.2 thick; corners R6.

Center u=45, v=50; extents u=5..85, v=8..92.

Tall sensor adapter: 44 W x 80 H x 2 thick; corners R6.

Center u=117, v=50; extents u=95..139, v=10..90.

Panel clearance holes DIA 2.4; body pilots DIA 2.0.

Cut openings normal to the flat front through the wall.

OLED assumes 0.96-inch active area; resolution alone does not specify module size. Verify before cutting.

Button holes assume small caps or custom plungers.

Add measured brackets for sensor, OLED and switches.

Dimension references: Waveshare OLED specs | RAKwireless GROW R307 specs


EEE / FINGERPRINT TERMINAL

REAR COVER / BATTERY COVER / SENSOR ADAPTER

REV B | 07 OCT 2026


APPROXIMATE - VERIFY HARDWARE FIT

REAR COVER / INNER VIEW

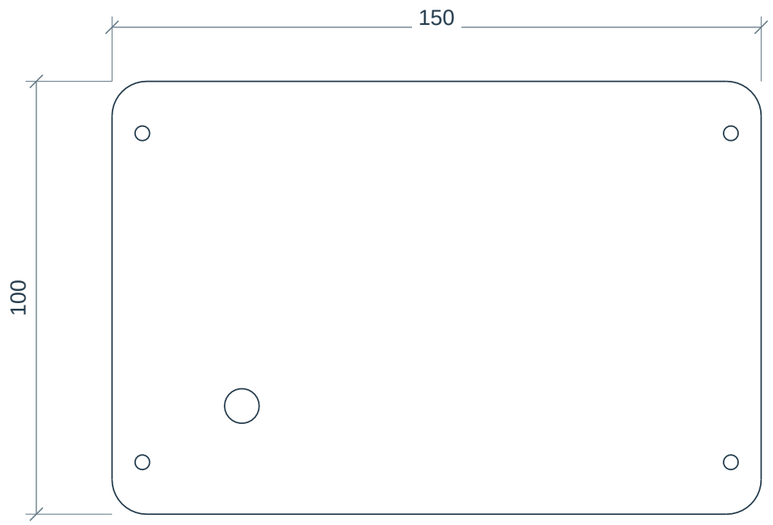

Cover 3 thick; front-outline corners R8.
4 x DIA 3.4; body pilots DIA 2.6, depth 11.
Screw x=-68/+68; z=12/88 (body axes).
Rear boss OD 11, length 14, toward front.
Power entry DIA 8 at x=-45, z=25.

BATTERY COVER / OUTER VIEW

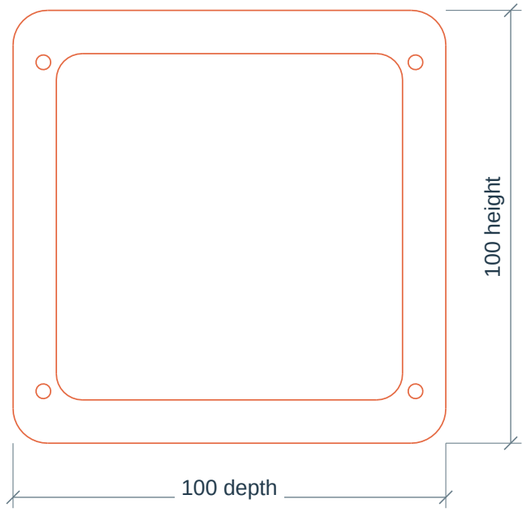

Cover 3 thick; corners R8.
4 x DIA 3.4 at y=7/93, z=12/88.
Pod bosses OD 11 x 14; pilots DIA 2.6 x 11.
Centered insert recess 80 x 80 x 0.8 deep, R6.
Insert 79.6 x 79.6 x 0.8, R5.8.
Insert has 0.2 edge gap; bonded cosmetic panel.

SENSOR ADAPTER

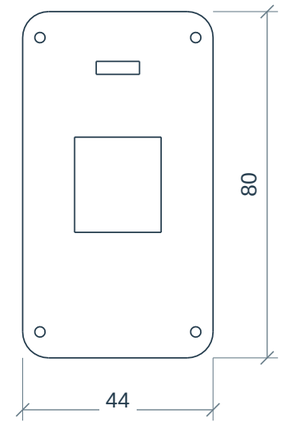


Plate 2 thick; corners R6.
4 x DIA 2.4; pitch 36 x 68.
Hole offsets from edges: 4, 6.
R307 window: 20 x 22 at plate center.
AS608 window: 15 x 19 at plate center.
Indicator: 10 x 3; center 27 above
plate center (optional LED/light pipe).

COMMON DETAILS

Main front outline R8, front edge roll R2; rear-cover exposed edge R0.8. Wall 3.2 nominal; front plate corners R6.
Pod attachment: y=62, z=15/85; body DIA 3.4 clearance, pod DIA 2.6 pilot. Wire passage DIA 8 at y=60, z=22.
Three left-side vents: 25 x 2; centers y=50, z=32/37/42. Add cable edge protection at the inter-compartment passage.
Floor pads: 8 x 8 x 4 high above 3.2 floor; centers x=-57/+15, y=46/76. PCB retention requires measured holes/clips.
Pilot sizes are provisional for printed plastic. Check screw type, engagement and fit with a small printed coupon.

EEE / FINGERPRINT TERMINAL

SPACE ALLOWANCES / CAD RECREATION & IMPORT WORKFLOW

REV B | 07 OCT 2026

APPROXIMATE - VERIFY HARDWARE FIT

Item	Provisional reservation (mm)	Fit / retention action
ESP32 development board	60 x 35 x 20	Measure board variant, antenna and USB access
0.96-inch OLED PCB	35 x 35 x 12	Confirm display opening and screw pattern
R307 / AS608 + cable	28 across x 60 inward x 35 height	Measure module/cable bend; add clamp
DS3231 breakout	40 x 26 x 12	Keep coin-cell holder accessible
Buzzer / switches	DIA 15 x 12 / 12 x 12 x 15 each	Match caps, travel, grille and retention
Veroboard / small breadboard	100 x 50 plan	Use left floor zone; measure and secure board
Battery holder + pack	25 across x 42 depth x 75 height	Choose holder/regulation/charge hardware

INTERNAL LAYOUT

Veroboard: x=-60..40, y=40..90; pads top z=7.2. Proposed 2-thick board occupies z=7.2..9.2.

Sensor envelope: x=28..56, y=3.7..63.7, z=32.5..67.5; keep tall parts out of this zone.

Battery envelope: x=83..108, y=45..87, z=12..87, avoiding the battery-cover bosses.

These three simple envelopes clear the enclosure solids; actual boards, plugs and brackets are unverified.

RECREATE THE RECTANGULAR ENCLOSURE

1. Set mm. Main shell: 150 W x 97 D x 100 H; front outline R8, front edge R2. Rear cover adds 3 depth.
2. Hollow with 3.2 front/floor/top/side walls and open rear. Add rear screw bosses and four floor pads.
3. Sketch sheet-2 cutouts on the vertical front; add separate 80 x 84 control panel and 44 x 80 sensor adapter.
4. Make a 40 x 100 x 100 pod with rounded side corners R8; hollow to outer side and add sheet-3 cover/insert.
5. Add vents, rear power entry, attachment holes and wiring passage. Check measured hardware and print tolerances.

WHEN YOU PROVIDE A CAD OR BLENDER FILE

Use its geometry as the drawing source. STEP is preferred for solids; Blender/mesh exports need confirmed scale and axes. The included project_cad.py already extracts orthographic edges from imported STEP. Uploaded geometry will be inspected before adding dimensions, sections and manufacturing details; screenshot perspective will not define the finished shape.