Introduction to eYFi-Mega Board

e-Yantra Team

Embedded Real-Time Systems (ERTS) Lab
Indian Institute of Technology, Bombay

eYFi-Mega dev board

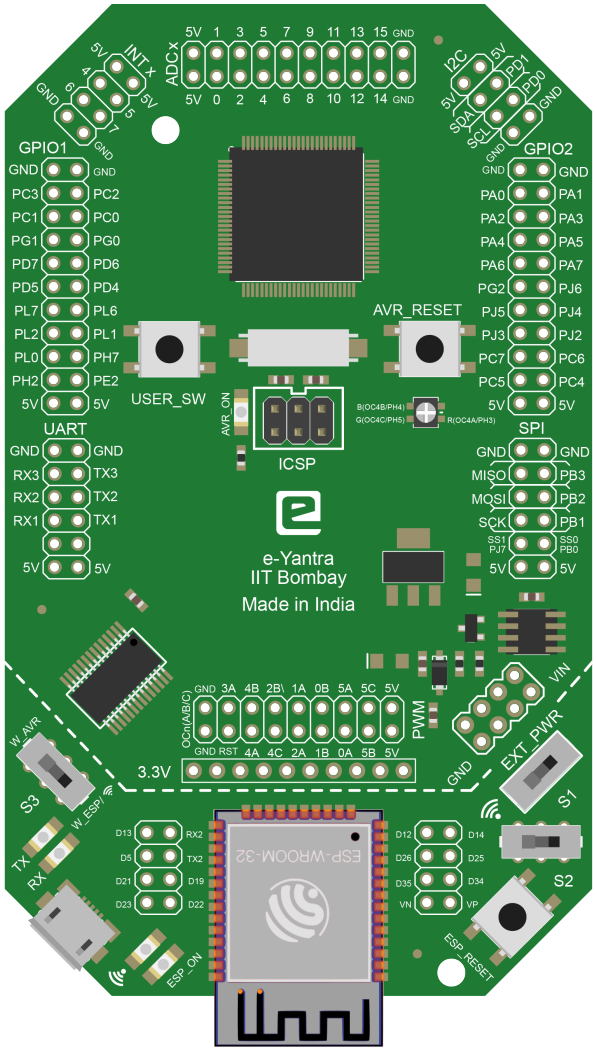

https://www.e-yantra.org/products

Features

Features

- **Dual Micro-controller Board:**
  - 8-bit ATmega 2560
  - 32-bit ESP32

Features

- **Dual Micro-controller Board:**
  - 8-bit ATmega 2560
  - 32-bit ESP32
- **High Output Power:** 12.5 W (5V, 2.5A)

Features

- **Dual Micro-controller Board:**
  - 8-bit ATmega 2560
  - 32-bit ESP32
- **High Output Power:** 12.5 W (5V, 2.5A)
- **Wi-Fi**:
  - Protocol: 802.11 b/g/n (802.11n up to 150 Mbps)
  - Frequency Range: 2.4 GHz $\sim$ 2.5 GHz

Features

- **Dual Micro-controller Board:**
  - 8-bit ATmega 2560
  - 32-bit ESP32
- **High Output Power:** 12.5 W (5V, 2.5A)
- **Wi-Fi**:
  - Protocol: 802.11 b/g/n (802.11n up to 150 Mbps)
  - Frequency Range: 2.4 GHz $\sim$ 2.5 GHz
- **Bluetooth Low Energy:**
  - Protocol: Bluetooth v4.2 BR / EDR and BLE specification

Features

- **Dual Micro-controller Board:**
  - 8-bit ATmega 2560
  - 32-bit ESP32
- **High Output Power:** 12.5 W (5V, 2.5A)
- **Wi-Fi**:
  - Protocol: 802.11 b/g/n (802.11n up to 150 Mbps)
  - Frequency Range: 2.4 GHz $\sim$ 2.5 GHz
- **Bluetooth Low Energy:**
  - Protocol: Bluetooth v4.2 BR / EDR and BLE specification
- **On-board File Storage:** 700 KB SPI-Flash File System (expandable up to 3 MB)

Features

- **Dual Micro-controller Board:**
  - 8-bit ATmega 2560
  - 32-bit ESP32
- **High Output Power:** 12.5 W (5V, 2.5A)
- **Wi-Fi**:
  - Protocol: 802.11 b/g/n (802.11n up to 150 Mbps)
  - Frequency Range: 2.4 GHz $\sim$ 2.5 GHz
- **Bluetooth Low Energy:**
  - Protocol: Bluetooth v4.2 BR / EDR and BLE specification
- **On-board File Storage:** 700 KB SPI-Flash File System (expandable up to 3 MB)
- **Compatible with FreeRTOS:** Both micro-controllers are capable of running FreeRTOS

Features

- **Dual Micro-controller Board:**
  - 8-bit ATmega 2560
  - 32-bit ESP32
- **High Output Power:** 12.5 W (5V, 2.5A)
- **Wi-Fi**:
  - Protocol: 802.11 b/g/n (802.11n up to 150 Mbps)
  - Frequency Range: 2.4 GHz $\sim$ 2.5 GHz
- **Bluetooth Low Energy:**
  - Protocol: Bluetooth v4.2 BR / EDR and BLE specification
- **On-board File Storage:** 700 KB SPI-Flash File System (expandable up to 3 MB)
- **Compatible with FreeRTOS:** Both micro-controllers are capable of running FreeRTOS
- **Arduino Programming Language:** Both micro-controllers can be programmed using Arduino API

Specifications

Specifications

- **Dimensions:** 107.95 mm x 64.01 mm x 24 mm (L x W x H)

Specifications

- **Dimensions:** 107.95 mm x 64.01 mm x 24 mm (L x W x H)
- **Board Supply Voltage:**
  - 4.75 V to 5.25 V from USB Micro-B cable
  - 7.0 V to 21.0 V from External Power Supply

Specifications

- **Dimensions:** 107.95 mm x 64.01 mm x 24 mm (L x W x H)
- **Board Supply Voltage:**
  - 4.75 V to 5.25 V from USB Micro-B cable
  - 7.0 V to 21.0 V from External Power Supply
- **Break-out power output;**
  - 3.3 V (max. 800 mA)
  - 5.0 V (max. 2.5 A)

Specifications

- **Dimensions:** 107.95 mm x 64.01 mm x 24 mm (L x W x H)
- **Board Supply Voltage:**
  - 4.75 V to 5.25 V from USB Micro-B cable
  - 7.0 V to 21.0 V from External Power Supply
- **Break-out power output;**
  - 3.3 V (max. 800 mA)
  - 5.0 V (max. 2.5 A)
- **RoHS status:** Compliant

Block Diagram (ATmega 2560)

Block Diagram (ATmega 2560)

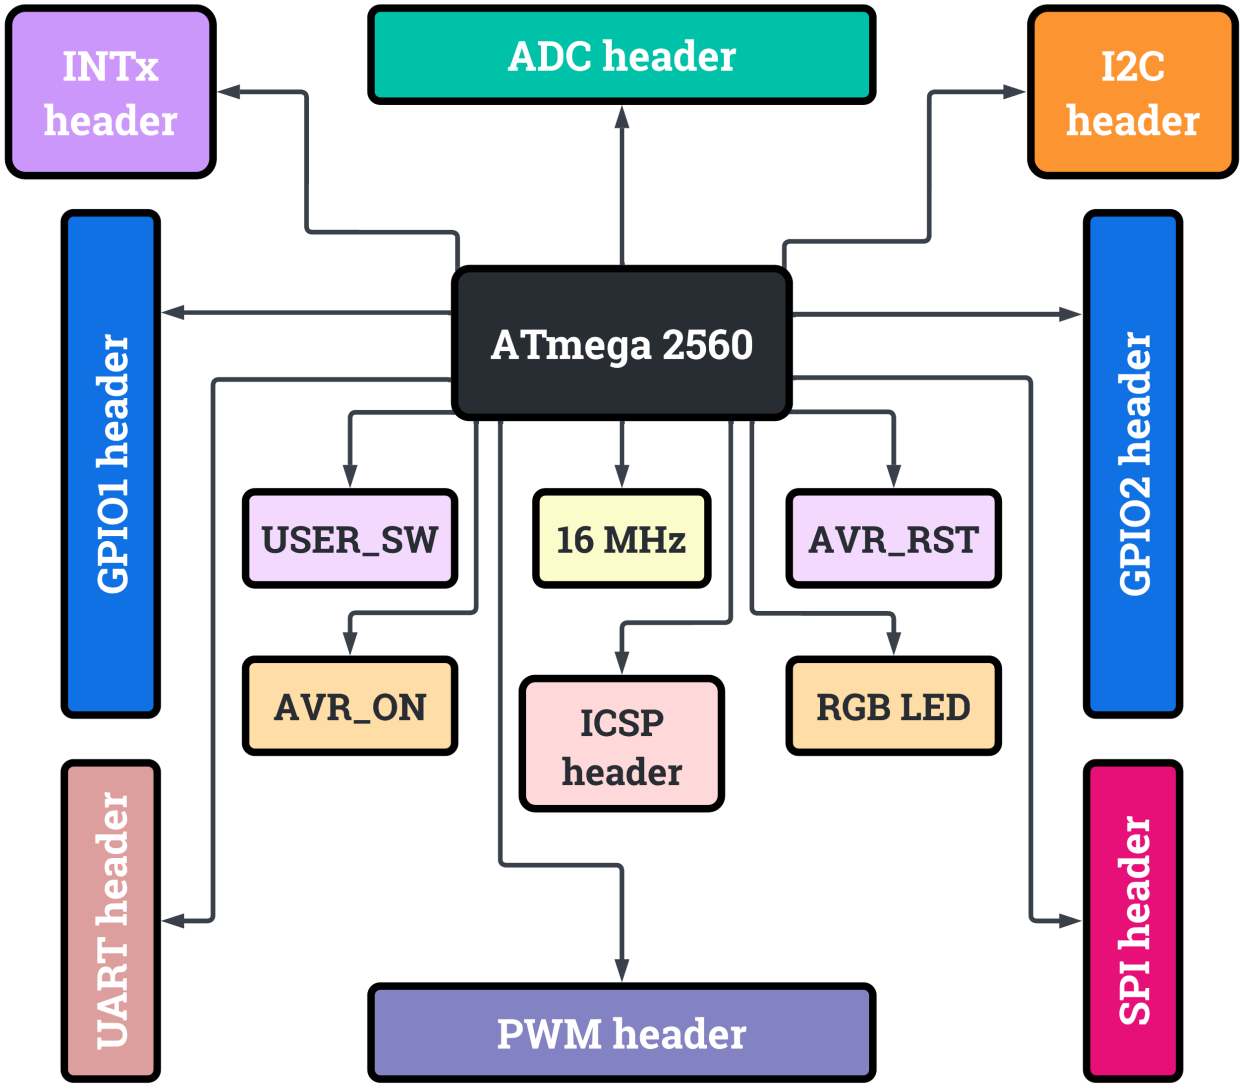

Block Diagram (ESP32)

Block Diagram (ESP32)

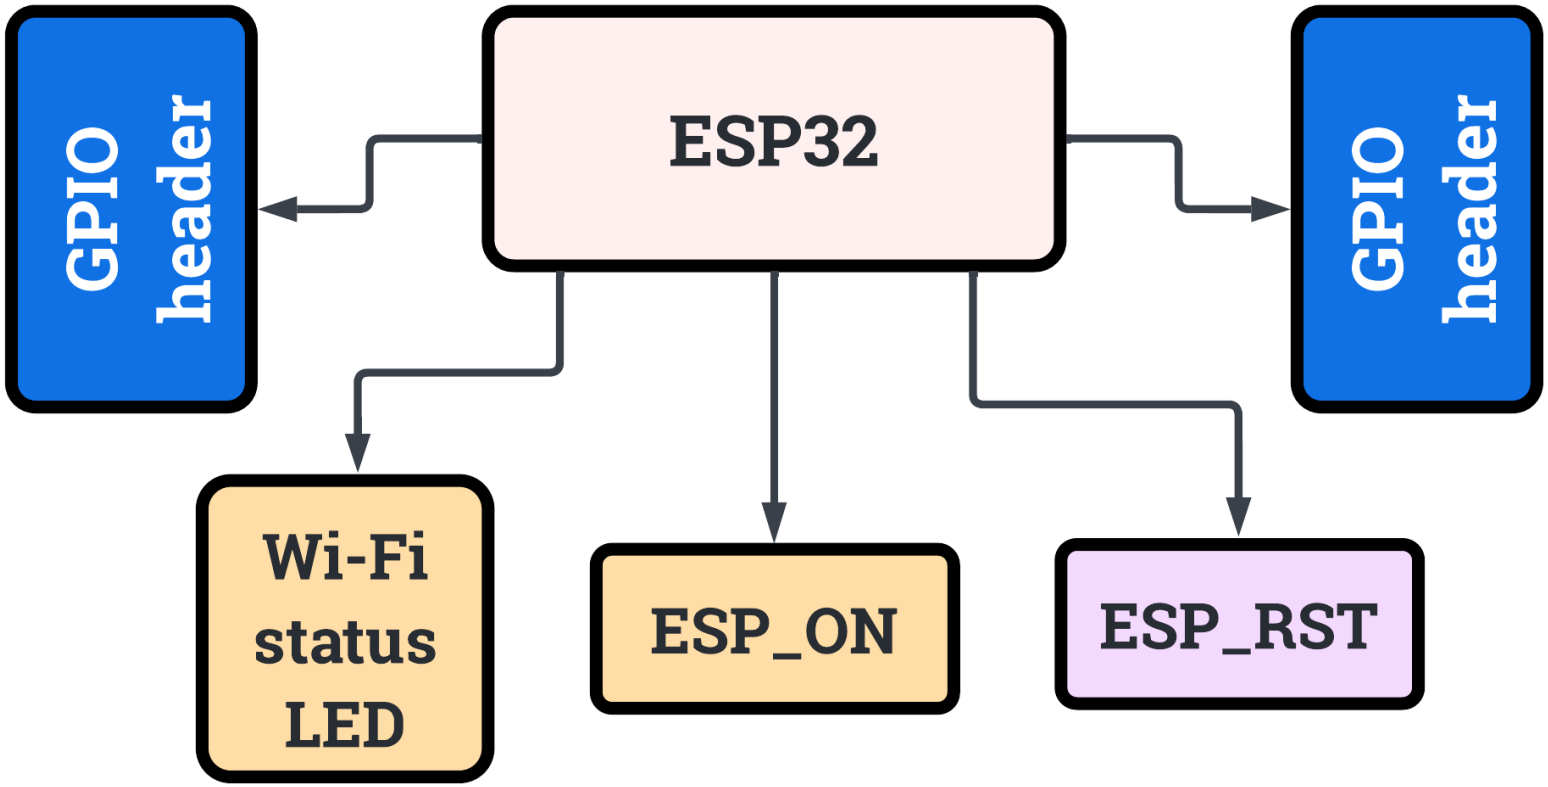

ESP32 Partition Table

ESP32 Partition Table

Partition Name	Start Address	Size
reserved area (nvs, otadata, phy_init)	–	300 KB
factory (ota-app)	0x10000	1 MB
app1 (user-app)	0x110000	2 MB
storage (spiffs)	0x310000	700 KB

Switches S1, S2 and S3

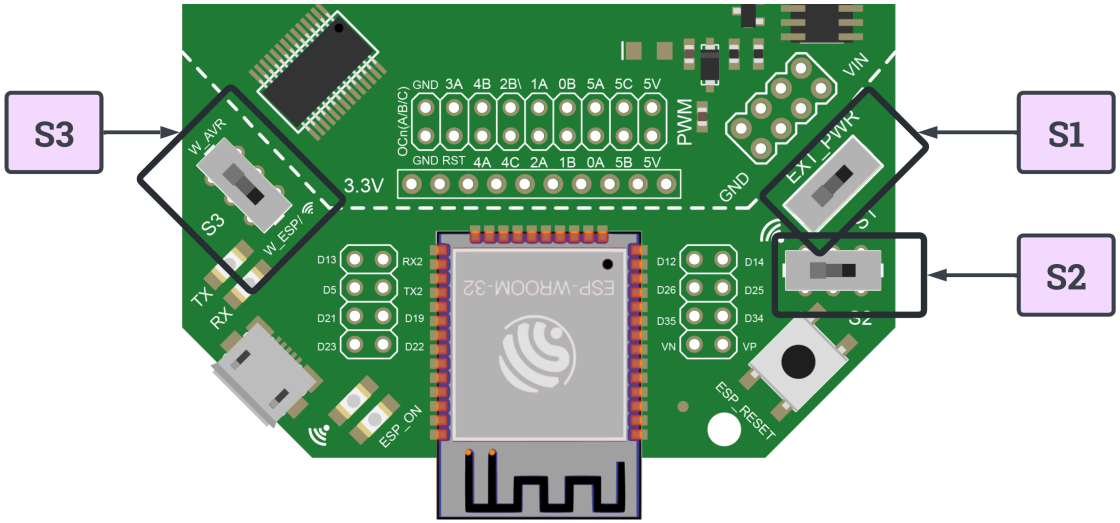

Switches S1, S2 and S3

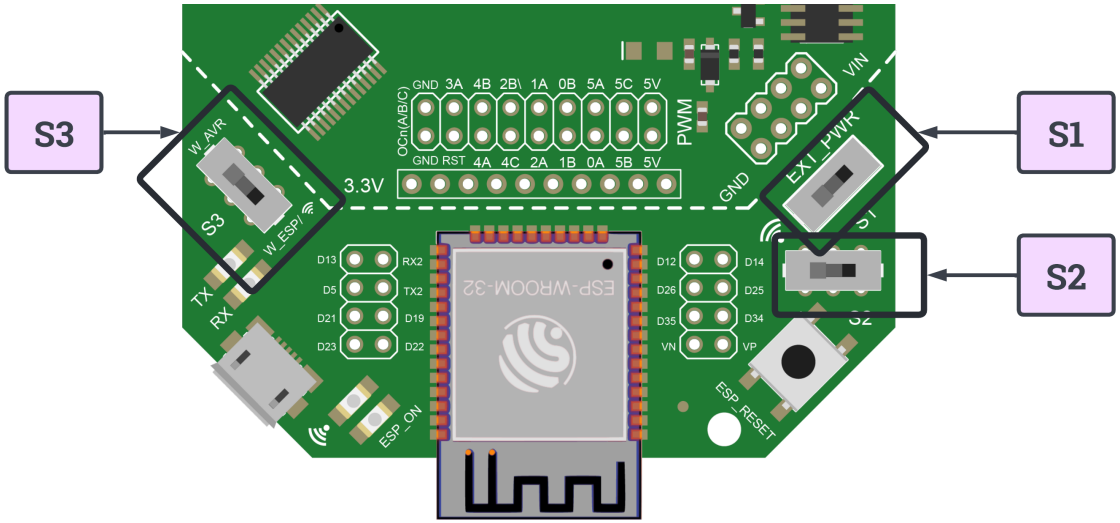

- **Switch S1**
  - ESP32 Partition Selection Switch (OTA-App / User-App selection)

Switches S1, S2 and S3

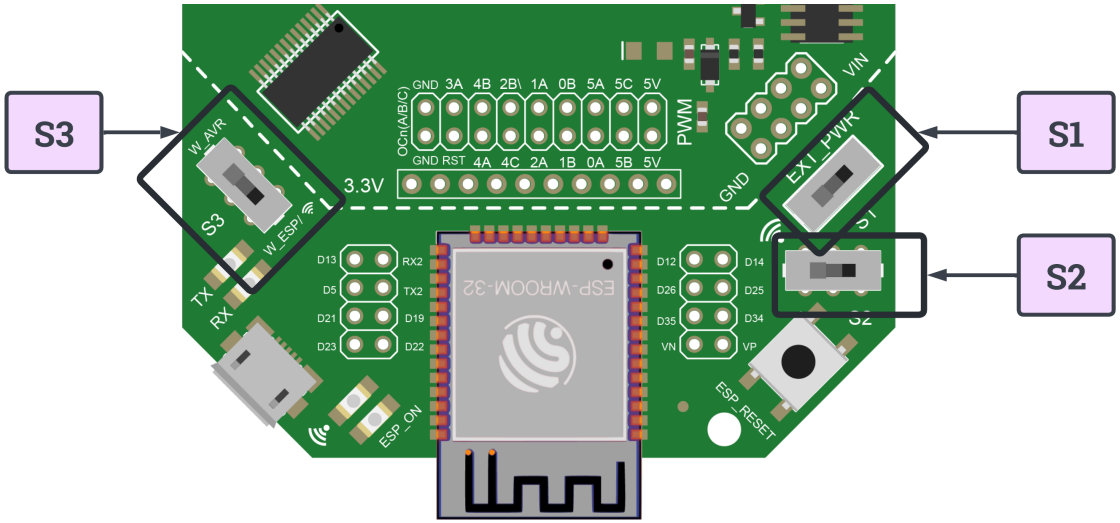

- **Switch S1**
  - ESP32 Partition Selection Switch (OTA-App / User-App selection)
- **Switch S2**
  - Toggle ESP32 UART1 connection with ATmega2560 UART0

Switches S1, S2 and S3

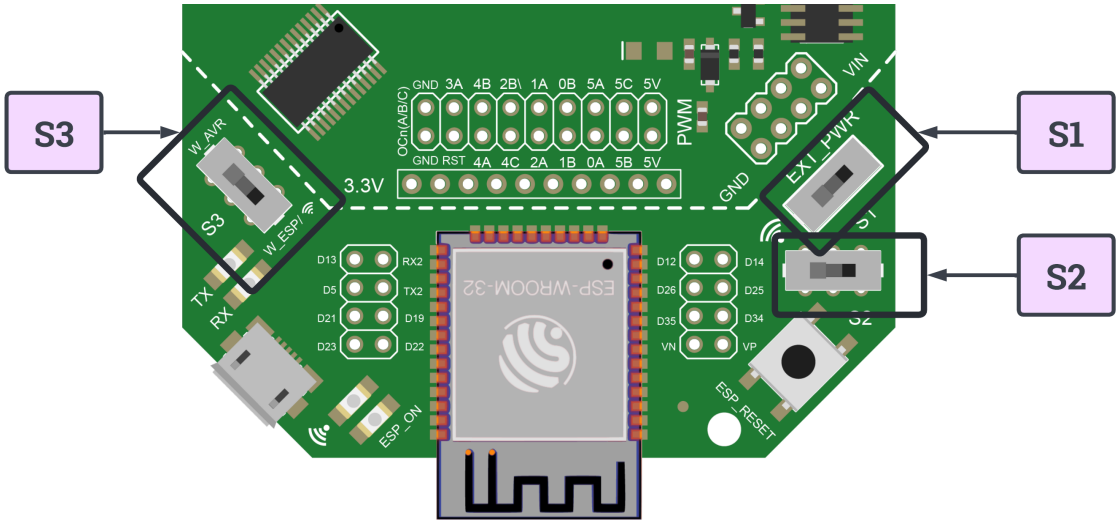

- **Switch S1**
  - ESP32 Partition Selection Switch (OTA-App / User-App selection)
- **Switch S2**
  - Toggle ESP32 UART1 connection with ATmega2560 UART0
- **Switch S3**
  - Wired flashing of ATmega 2560 *OR* ESP32

Switch positions for Programming

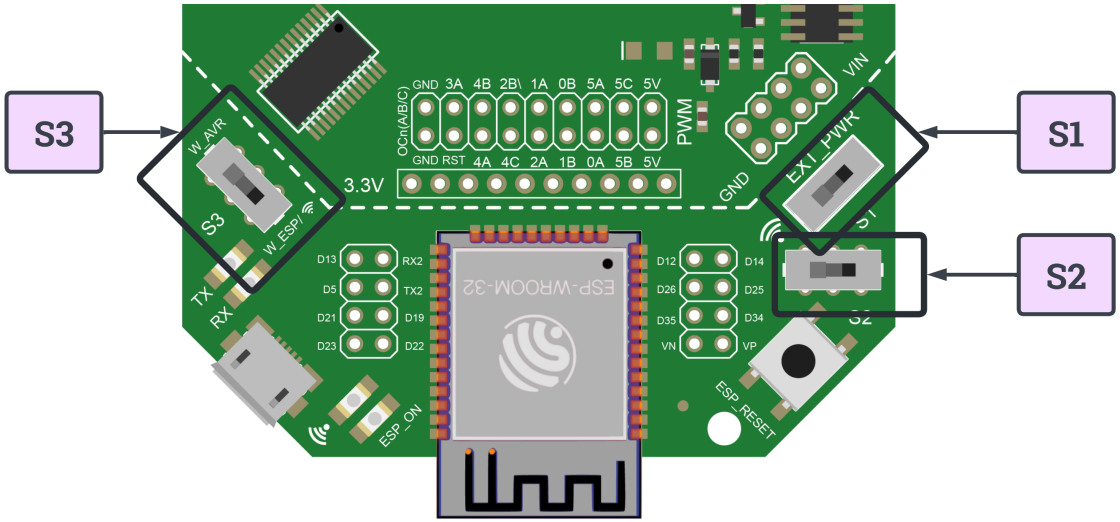

Switch positions for Programming

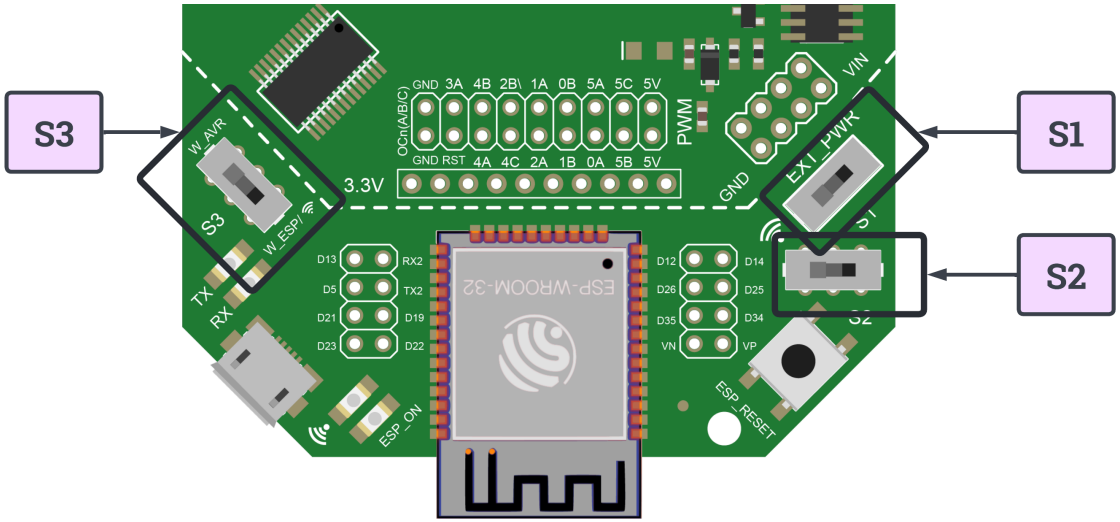

Programming Mode	S1 Position (towards)	S2 Position (towards)	S3 Position (towards)
ATmega2560 Wired	–	–	W_AVR
ATmega2560 Wireless	Wi-Fi symbol	Wi-Fi symbol	W_ESP / Wi-Fi symbol
ESP32 Wired	–	–	W_ESP / Wi-Fi symbol
ESP32 Wireless	Wi-Fi symbol	Wi-Fi symbol	W_ESP / Wi-Fi symbol

Wi-Fi Status LED Patterns

State	Wi-Fi Status LED Pattern
Wi-Fi client is connected to ESP32	ON
Wi-Fi client disconnected from ESP32	OFF
File Upload Start	OFF
File Upload End	Blink Fast for 100 ms
Firmware Flash Start	Blink Fast
Firmware Flash End - AVR	Blink Slow for 5 sec
Firmware Flash End - ESP32	Blink Slow till S1 switch is toggled

Power headers

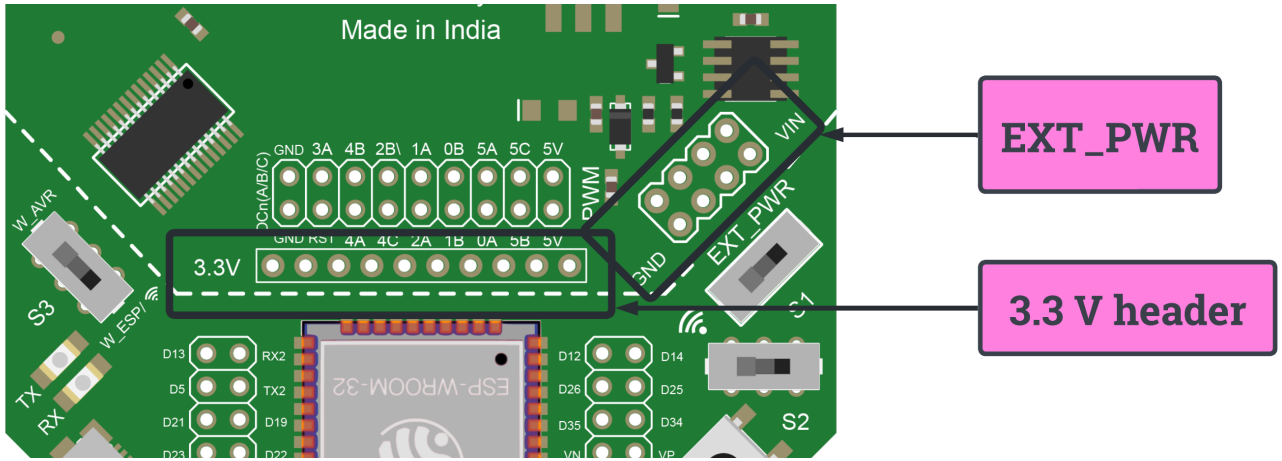

Power headers

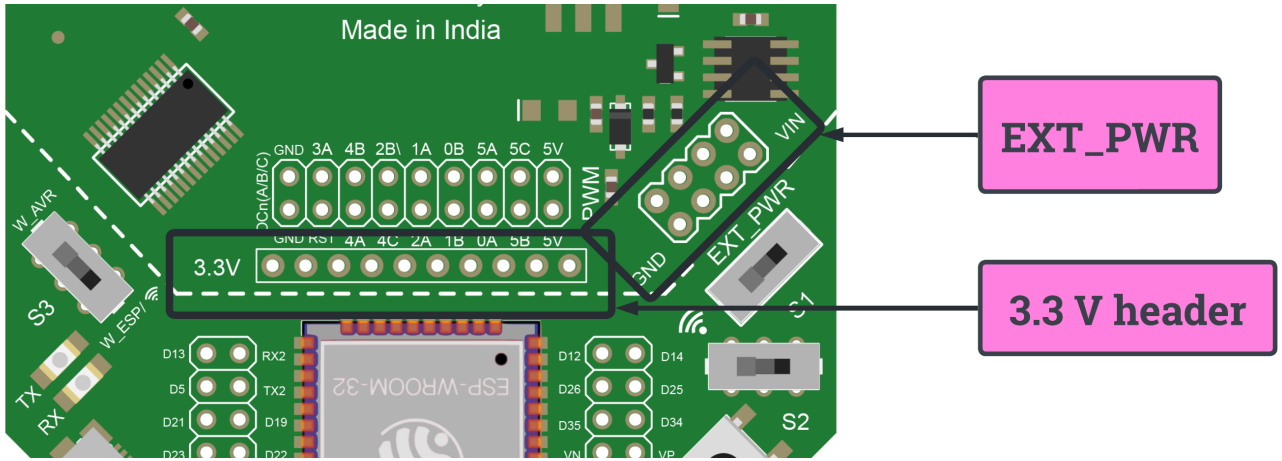

- **5 V**
  - Multiple 5 V supply available around the board

Power headers

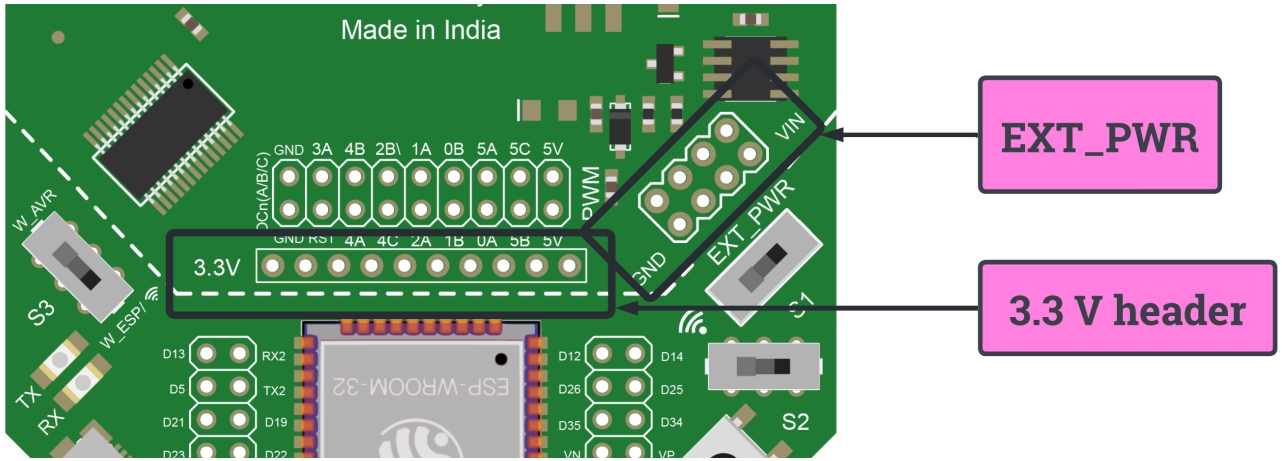

- **5 V**
  - Multiple 5 V supply available around the board
- **3.3 V**
  - Max. 800 mA can be drawn
  - Drawing high current not advisable

Power headers

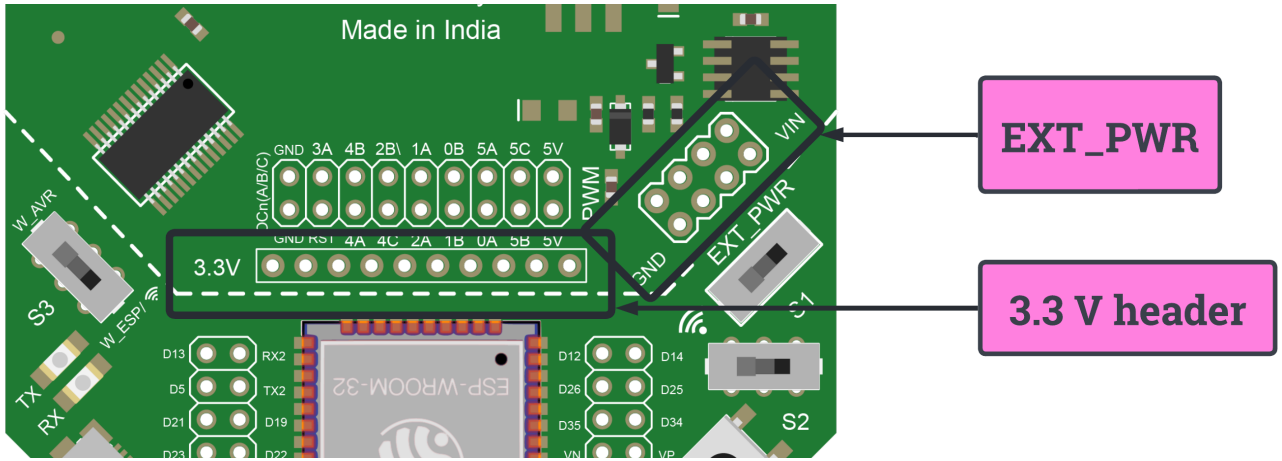

- **5 V**
  - Multiple 5 V supply available around the board
- **3.3 V**
  - Max. 800 mA can be drawn
  - Drawing high current not advisable
- **External Power**
  - Ext. Supply strictly in range 7.0 V to 21.0 V
  - Typically 1 A and max. 2.5 A can be drawn

Thank You!

Post your queries on: helpdesk@e-yantra.org