


Input Voltage	W (mm)	H (mm)	D (mm)	W1 (mm)	H1 (mm)	D1 (mm)	Fix Hole (mm)	Fig.
EN760-4T2200P/2000G	300	1150	505	180	1005	509.5	13	Fig.d
EN760-4T2500P/2200G								
EN760-4T2800P/2500G	330	1310	550	230	1165	554.5	13	Fig.d
EN760-4T3150P/2800G								
EN760-4T3550P/3150G	340	1415	555	240	1270	559.5	13	Fig.d
EN760-4T3750P/3550G								
EN760-4T4000P/3750G								
EN760-4T4500P/4000G								
EN760-4T5000P/4500G								


Three-phase input adapter copper busbar assembly (correspondence table between Frequency Inverter and three-phase input adapter copper busbar assembly)

Input Voltage	Three-phase input adapter copper busbar assembly model
EN760-4T2000P/1850G	SP-CTP-2200
EN760-4T2200P/2000G	
EN760-4T2500P/2200G	
EN760-4T2800P/2500G	SP-CTP-2800
EN760-4T3150P/2800G	
EN760-4T3550P/3150G	SP-CTP-4000
EN760-4T3750P/3550G	
EN760-4T4000P/3750G	
EN760-4T4500P/4000G	
EN760-4T5000P/4500G	


Operating Keypad and Keypad Mounting Box Outline Dimensions (unit: mm)

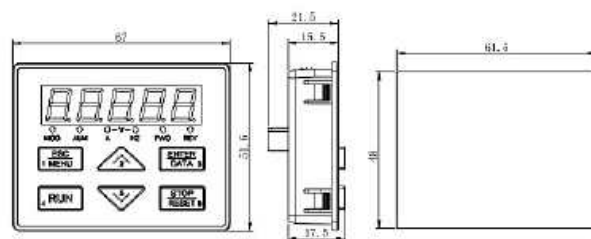

❖ EN-LED15 Keyboard Shape and Cutout Dimensions

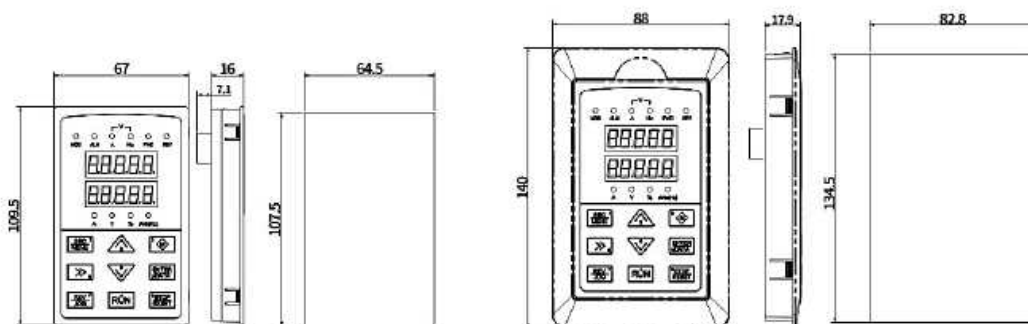

❖ EN-LED16 Keyboard Shape and Cutout Dimensions

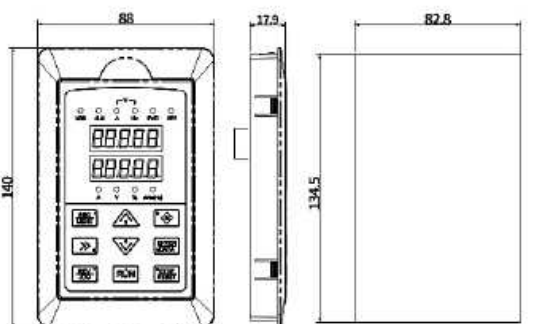

❖ EN-LED16 Keyboard Mounting Box Shape and Cutout Dimensions

Note:

- (1) When using the EN-LED15 or EN-LED15-D keypad for remote mounting, it cannot be installed using the keypad mounting box; only the keypad itself can be installed. Please refer to the diagram for the cutout dimensions.
- (2) When using the EN-LED16 or EN-LED16-D keypad for remote mounting, customers can choose the cutout dimensions based on either the keypad or the keypad mounting box according to actual needs. It is recommended that the mounting panel thickness be between 1.0 mm and 1.5 mm.
- (3) If installation requires the keypad mounting box, it must be ordered separately.