IKON

IKL334 face fix louvre



Product description

Blade Centre 34mm . Blade angle 60 degree.

Visual free area 59%. Physical free area 43.5%.

Frame depth 36.2mm

Tested to EN 13030:2001

BSRIA Test report 104080/2

K Factor 23.56

Watertightness	%	Class
Velocity 0.0	99.5	A
0.5	98.6	B
1.0	95.8	B
1.5	78.3	D
2.0	44.0	D
2.5	24.4	D

Ce 0.206

Pressure Drop	Pd
Face Velocity 0.5	6.70
1.0	20.0
1.5	39.7
2.0	65.9
2.5	98.7
3 .0	137.9

Options

Standard RAL or BS colours. Anodizing to special order.

Drainage channel

Insect mesh

Bird mesh

Single skin, or double skin insulated blanking panels

with or without plenum box.

Performance: airflow, louvre with insect mesh

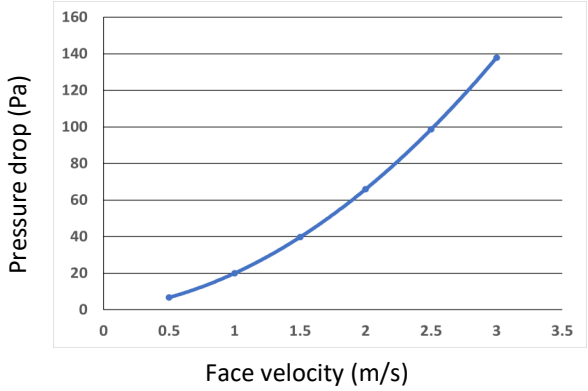

Unit 1-3 Yardley Brook Industrial Park, Leaford Way, Shard End, Birmingham, B33 9TX

Tel: 0121 789 9936, Fax 0121 783 7905, Web : www.ikonaluminium.com, Sales : info@ikonaluminium.co.uk

Issue 1—02/01/24