
Hubbard capacity of the reference implementations

Conditional circuit costs: τ = 1, r = 4, U/J = 4, p = 10^{-3}

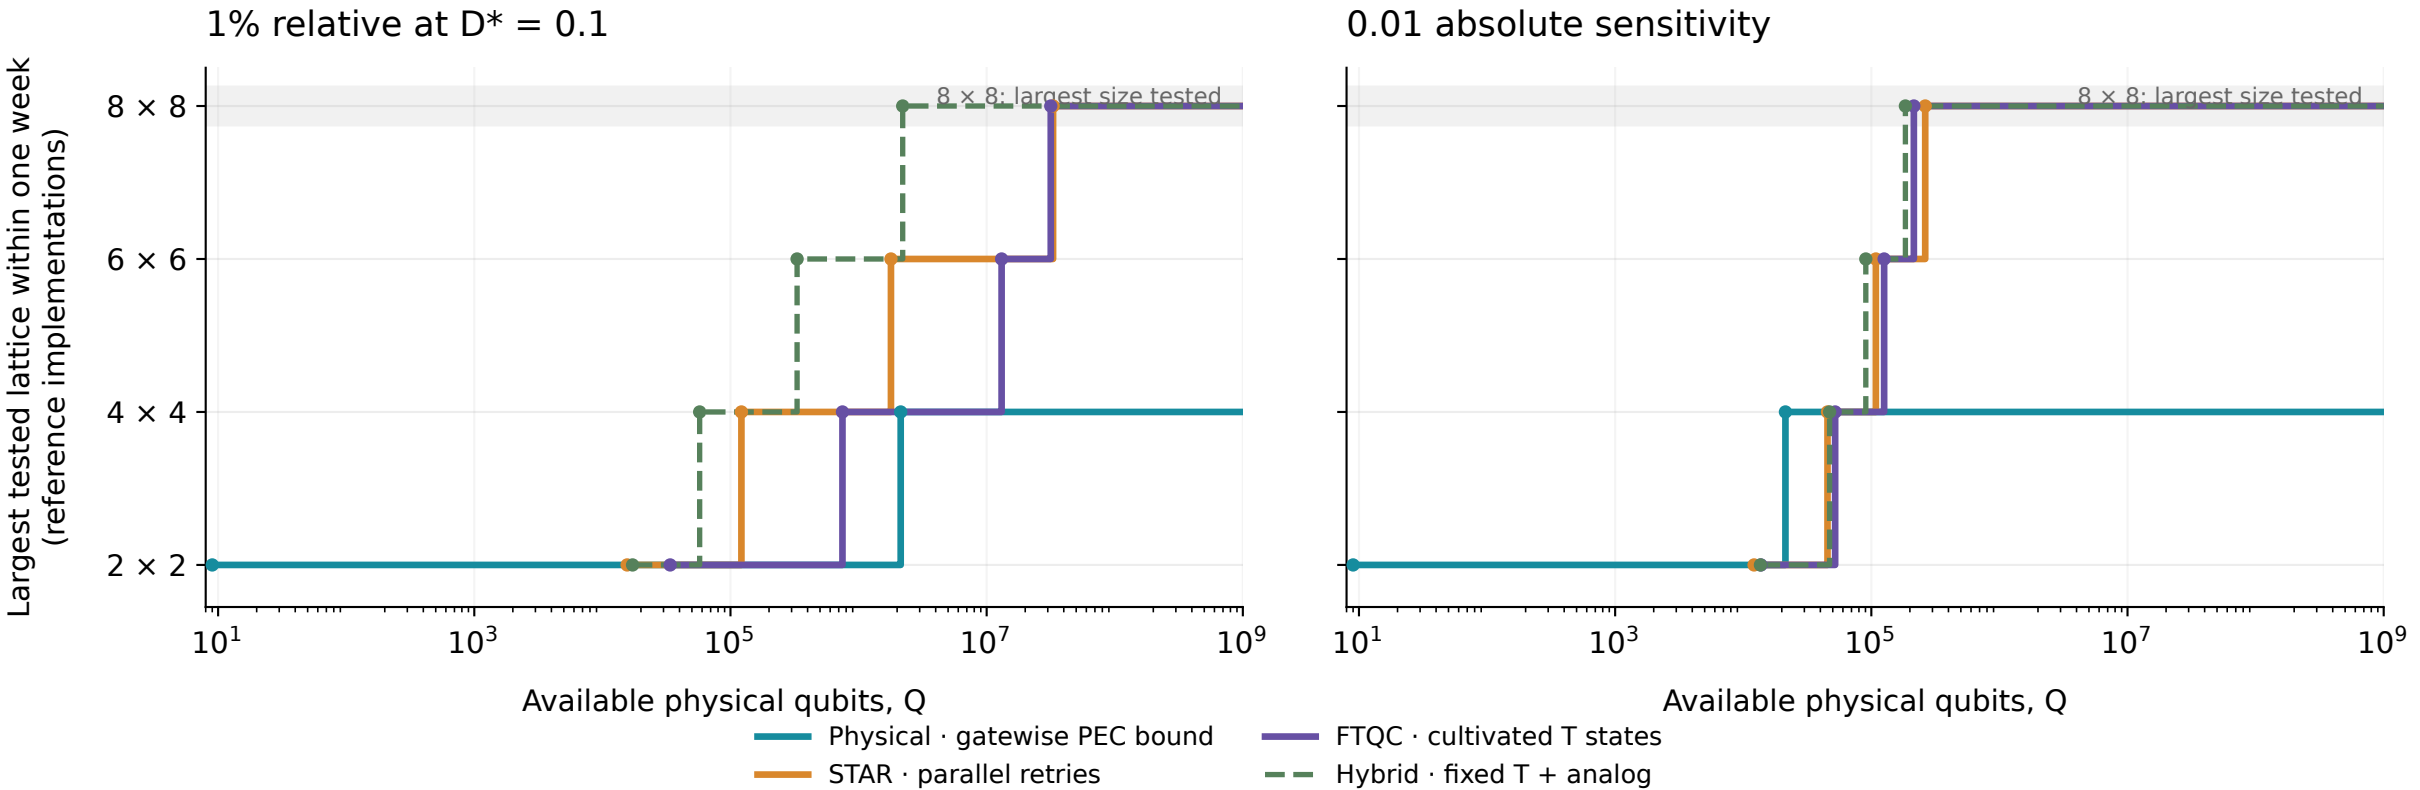

The physical arm uses a sufficient gatewise PEC budget, not an optimized hardware limit. Steps show tested sizes only.
Four-step accuracy is unvalidated at L ≥ 4 and fails the smaller-patch checks.