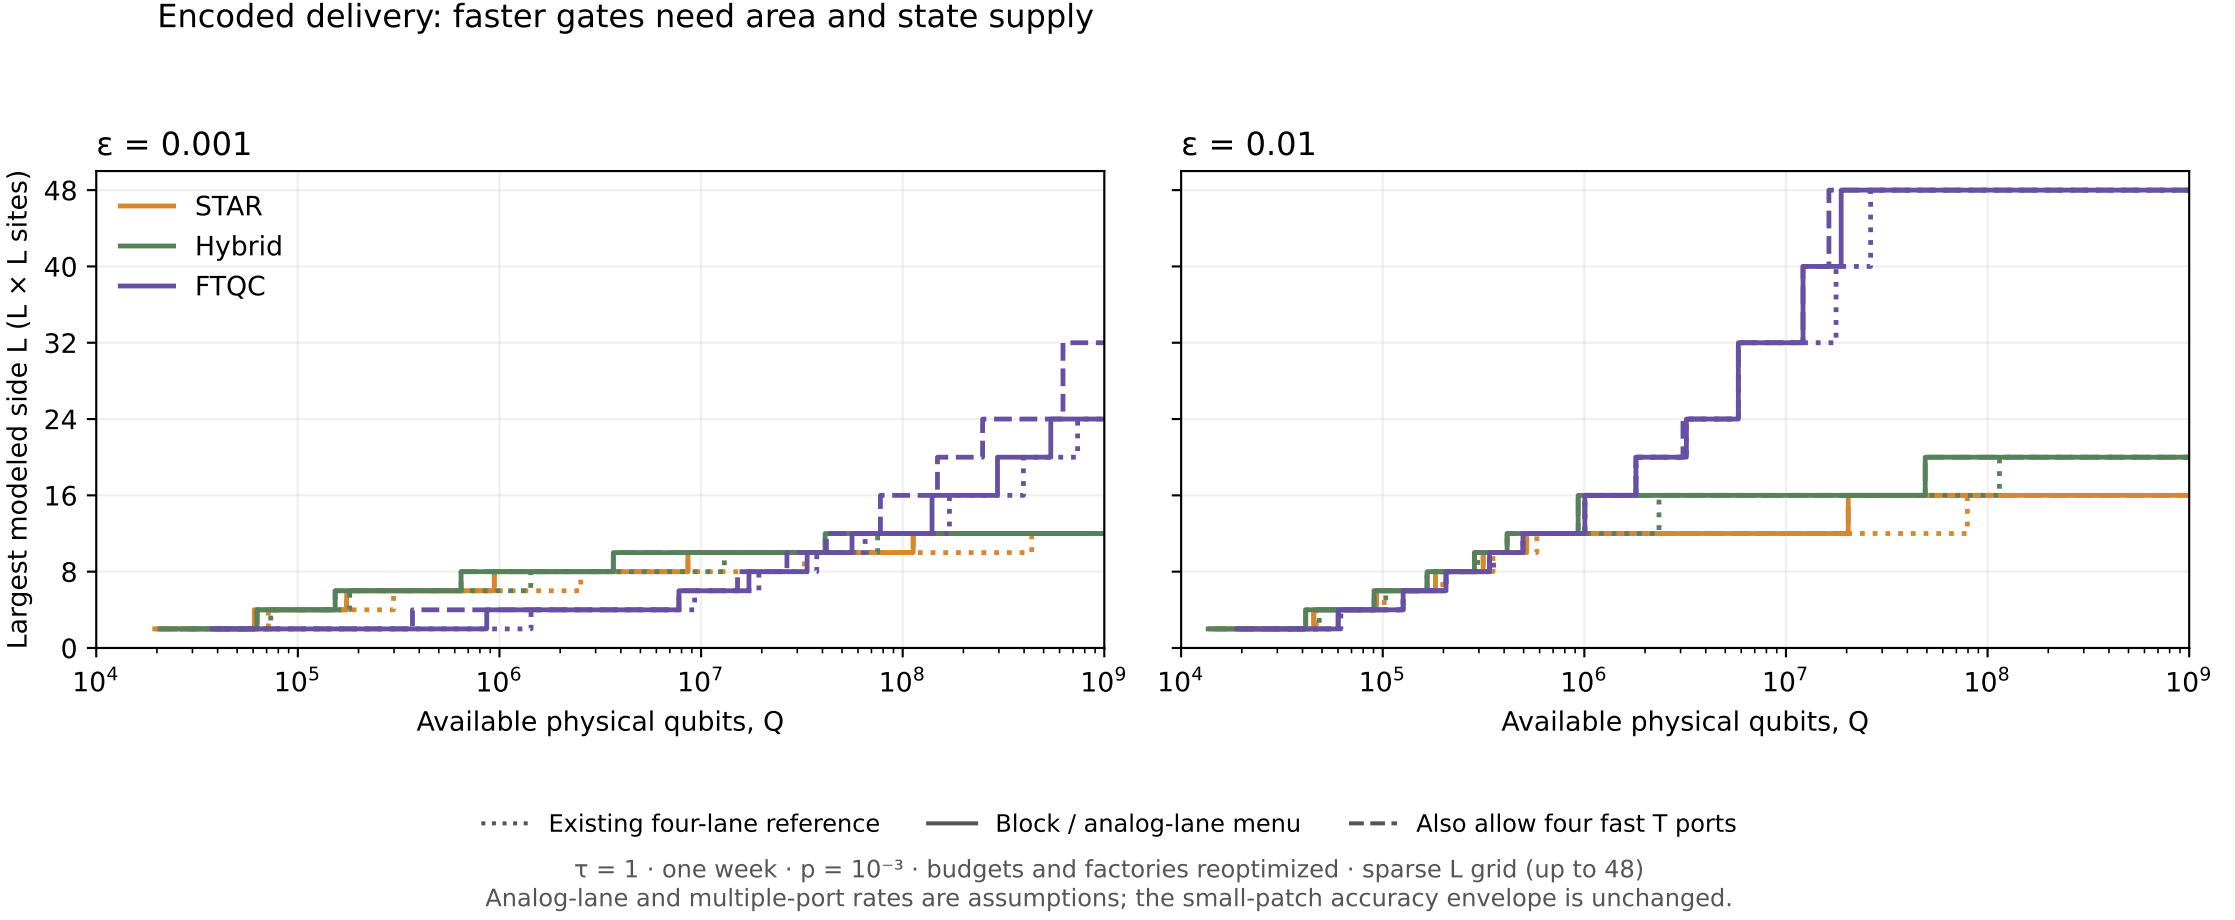
Encoded delivery: faster gates need area and state supply
ε = 0.001
ε = 0.01
STAR
Hybrid
FTQC
Largest modeled side L (L × L sites)
0
8
16
24
32
40
48
10^4
10^5
10^6
10^7
10^8
10^9
Available physical qubits, Q
Existing four-lane reference
Block / analog-lane menu
Also allow four fast T ports
τ = 1 · one week · p = 10^{-3} · budgets and factories reoptimized · sparse L grid (up to 48)
Analog-lane and multiple-port rates are assumptions; the small-patch accuracy envelope is unchanged.