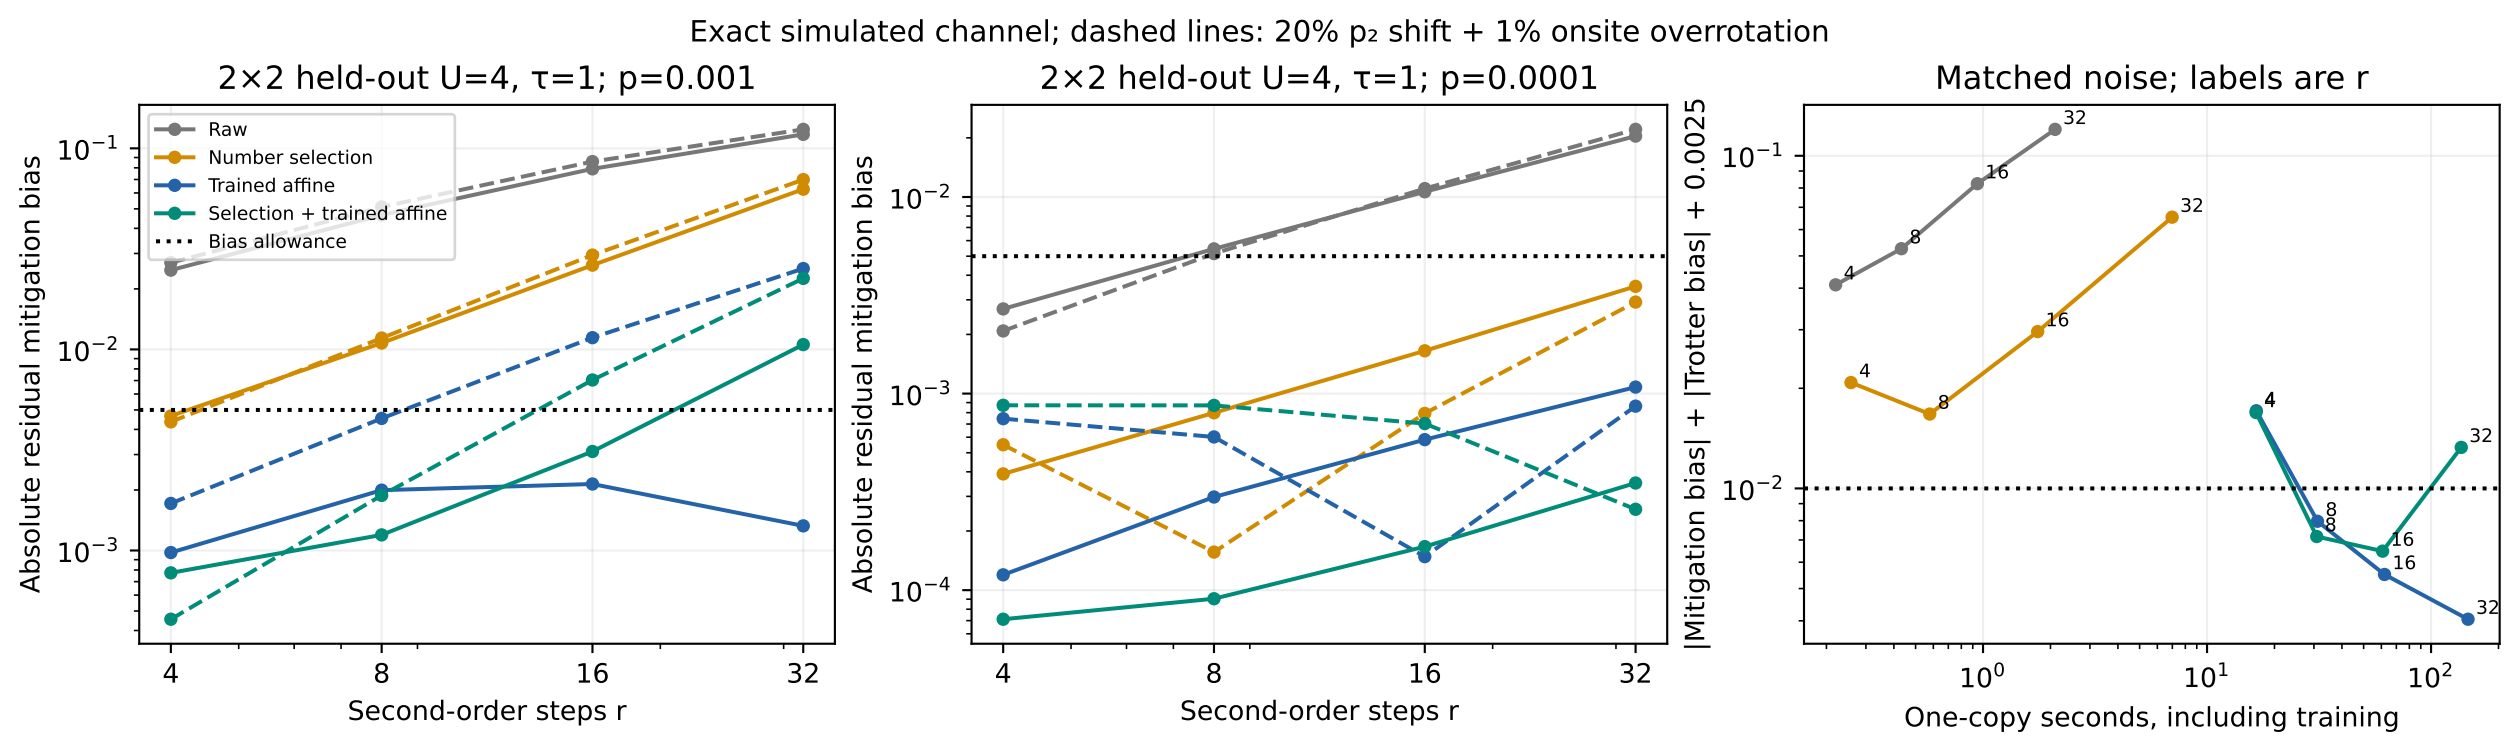
Exact simulated channel; dashed lines: 20% p₂ shift + 1% onsite overrotation
2×2 held-out U=4, τ=1; p=0.001
2×2 held-out U=4, τ=1; p=0.0001
Matched noise; labels are r
Raw
Number selection
Trained affine
Selection + trained affine
Bias allowance
Absolute residual mitigation bias
Second-order steps r
|Mitigation bias| + |Trotter bias| + 0.0025
One-copy seconds, including training