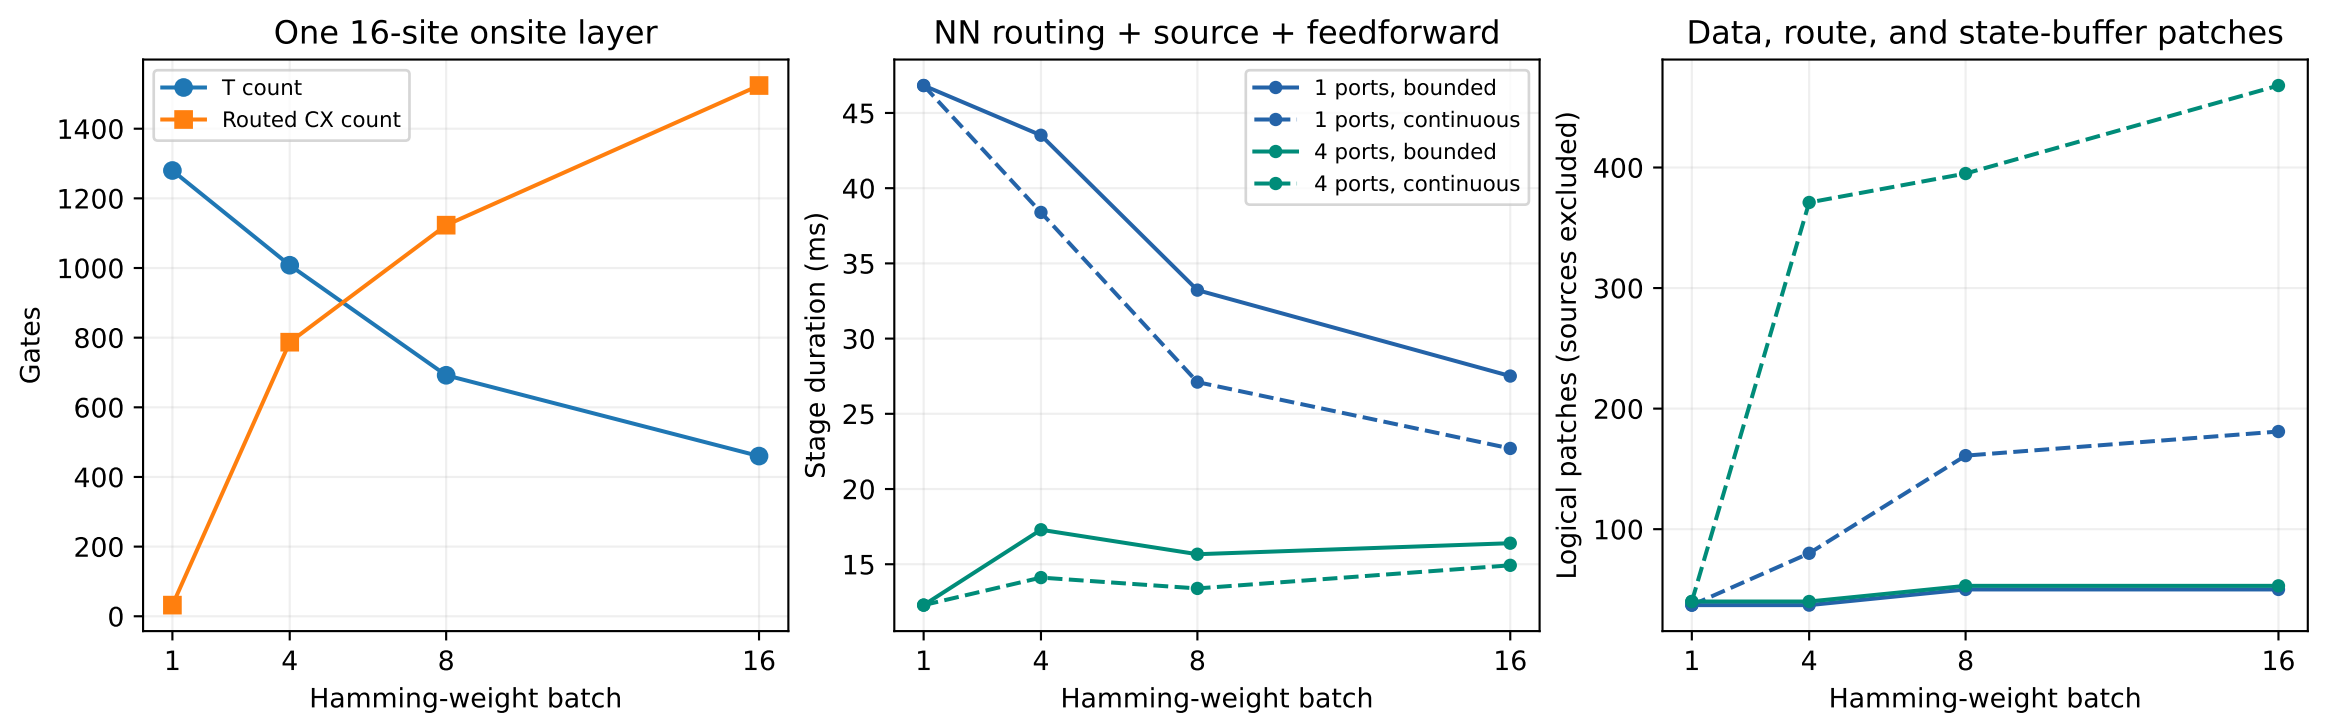
One 16-site onsite layer
T count
Routed CX count
Gates
0
200
400
600
800
1000
1200
1400
1
4
8
16
Hamming-weight batch
NN routing + source + feedforward
1 ports, bounded
1 ports, continuous
4 ports, bounded
4 ports, continuous
Stage duration (ms)
15
20
25
30
35
40
45
1
4
8
16
Hamming-weight batch
Data, route, and state-buffer patches
Logical patches (sources excluded)
100
200
300
400
1
4
8
16
Hamming-weight batch