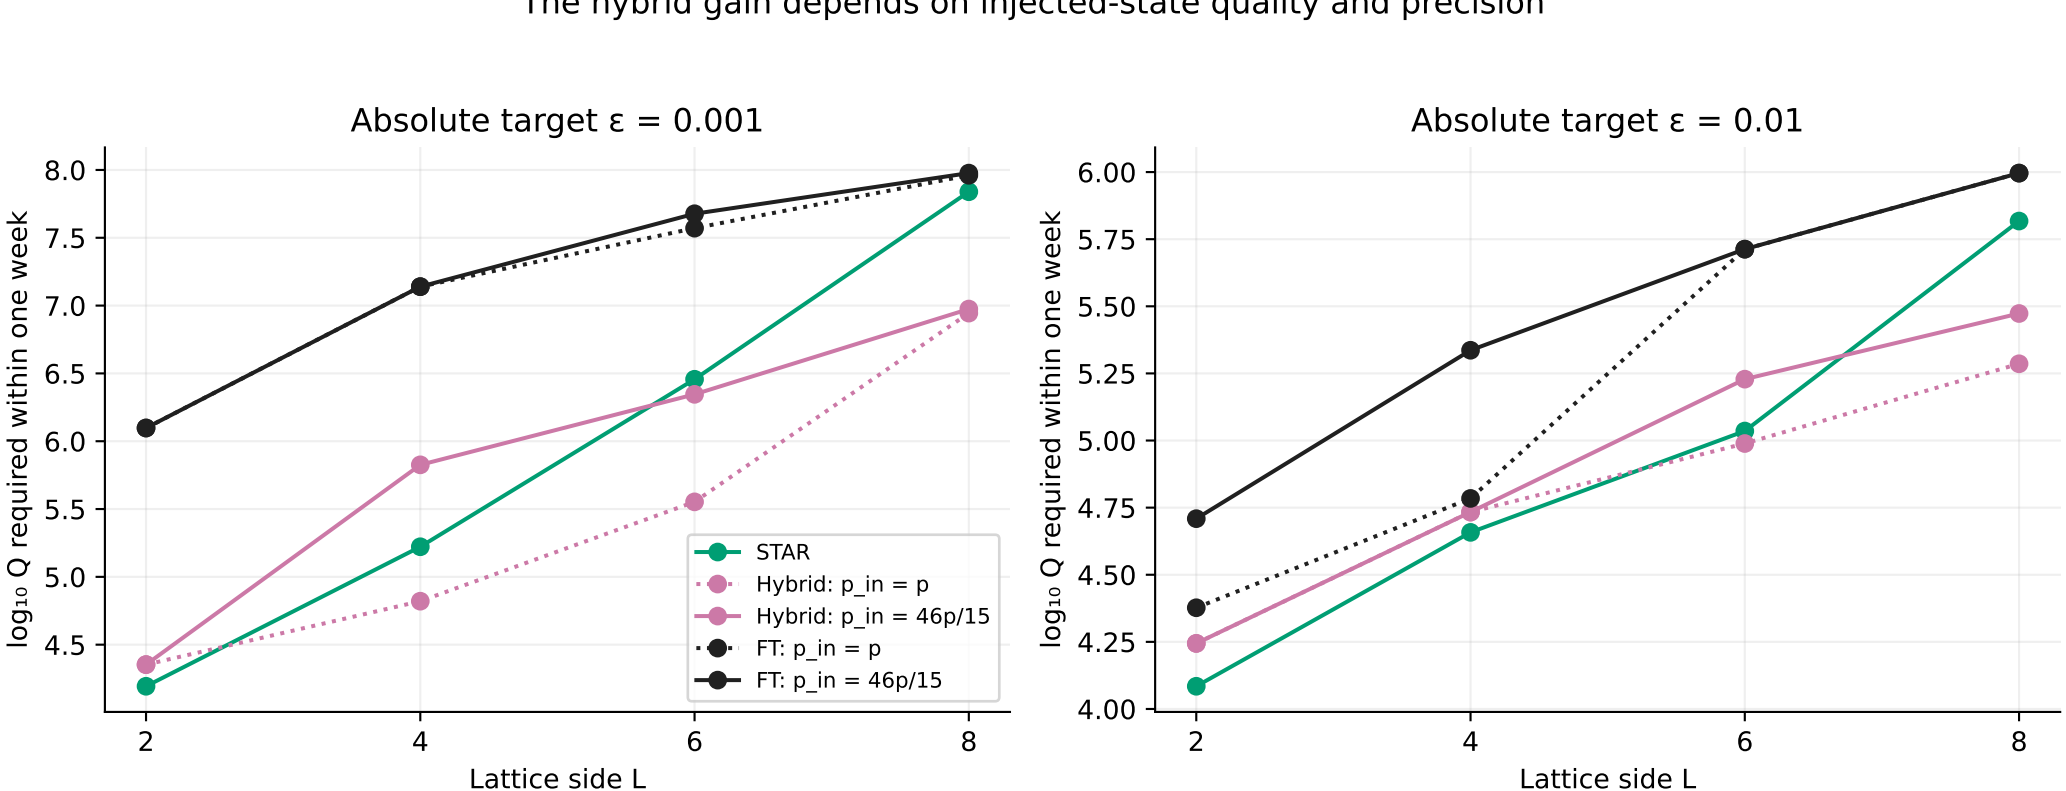
The hybrid gain depends on injected-state quality and precision
Absolute target ε = 0.001
Absolute target ε = 0.01
log₁₀ Q required within one week
Lattice side L
STAR
Hybrid: p_in = p
Hybrid: p_in = 46p/15
FT: p_in = p
FT: p_in = 46p/15
Plaquette τ = 1, r = 4. Same compiled FT words in both panels; encoded timings are reference models.