
31.A/C Filter

A: REPLACEMENT

- 1) Remove the pocket assembly. <Ref. to El-63, REMOVAL, Glove Box.>
- 2) Pinch the tabs to release the lock, and remove the filter kit.

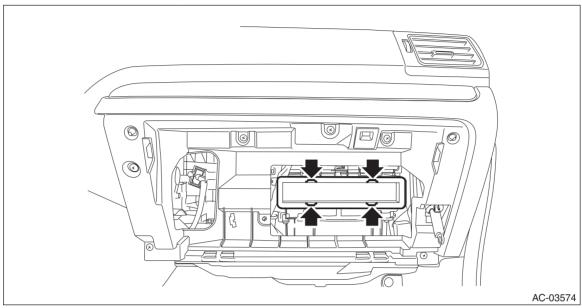

NOTE:

Pull out while tilting the front side of the filter downward to prevent dirt or dust from falling inside the case.

- 3) Install a new filter kit.
- 4) Install the pocket assembly.