

# Industrial Fire Safety System

Project by:

Arjun S

**Table of Content:**

S. No	Content	Page No
1	Abstract	2
2	Introduction	3
3	About the Project	4
4	Source Code	7
5	Output	10
6	Conclusion	12

# Abstract

---

The Industrial Fire Safety System Project presented in this report is a comprehensive solution designed to enhance the safety and security of workers in industries. With the integration of various sensors and the utilization of an Arduino Uno microcontroller, this system provides real-time monitoring and early detection of environmental conditions that could lead to fire hazards. The system incorporates a DHT11 Temperature Sensor, MQ2 Gas Sensor, MQ136 Gas Sensor, Flame Sensor, LED indicators, a Buzzer, and an LCD display to create a multifaceted approach to industrial fire safety.

The DHT11 Temperature Sensor is utilized to monitor the ambient temperature within the industrial environment, allowing for the detection of abnormal temperature fluctuations. The MQ2 and MQ136 Gas Sensors play a crucial role in monitoring the presence of hazardous gases such as Methane, Smoke, H<sub>2</sub>S which are potential precursors to industrial fires. The Flame Sensor is employed to detect the presence of an open flame, which is a critical component in fire detection.

The system's hardware components are complemented by an Arduino Uno microcontroller, which serves as the central processing unit for data collection and decision-making. When abnormal conditions are detected, the system triggers various warning mechanisms. LEDs are used to provide visual alerts, and a Buzzer generates an audible alarm, ensuring that both visual and auditory notifications are delivered to the workers on site. Additionally, real-time data is displayed on an LCD screen, allowing for immediate assessment of environmental conditions and evacuation of workers.

The Industrial Fire Safety System Project addresses the pressing need for timely fire hazard detection in industrial settings. By combining various sensors and intelligent processing, this system provides an effective and reliable means of preventing accidents, protecting lives, and safeguarding valuable industrial assets. The integration of real-time data display and multi-modal alerts enhances the system's usability, making it an essential tool in industrial safety management.

This project offers valuable insights into the practical application of sensor technology and microcontroller-based systems for enhancing safety in industrial environments. The comprehensive approach taken in this project can serve as a foundation for further developments and improvements in industrial fire safety systems.

# Introduction

---

Industrial facilities are vital components of modern society, serving as hubs for manufacturing, energy production, and numerous other critical activities. However, the industrial environment is not without its risks, and one of the most pressing concerns is the potential for fire hazards. Fires in industrial settings can lead to catastrophic consequences, including loss of life, property damage, environmental pollution, and economic disruption. As such, the development and implementation of robust fire safety systems are of paramount importance.

The Industrial Fire Safety System Project presented in this report addresses the urgent need for a proactive, real-time monitoring and early detection solution in industrial settings. This project aims to integrate cutting-edge technology, including an Arduino Uno microcontroller, a DHT11 Temperature Sensor, MQ2 and MQ136 Gas Sensors, a Flame Sensor, LED indicators, a Buzzer, and an LCD display, to create a multifunctional system designed to enhance industrial fire safety.

The significance of this project lies in several key aspects:

**Early Detection of Fire Hazards:** The ability to detect potential fire hazards before they escalate is crucial in preventing catastrophic accidents. Industrial facilities often handle flammable materials and operate in conditions that are susceptible to temperature fluctuations and gas leaks. An early warning system can significantly reduce the risk of fire outbreaks.

**Minimizing Losses and Downtime:** In the event of a fire, rapid response is essential to minimize damage and disruption. Early detection systems can alert personnel and trigger fire suppression systems, mitigating the extent of the fire and allowing for a more efficient response.

**Protection of Human Lives:** Ensuring the safety of personnel working in industrial facilities is paramount. By detecting and alerting to potential fire hazards in real-time, this project contributes to safeguarding the lives of employees and emergency responders.

**Asset Protection:** Industrial facilities house expensive machinery, equipment, and materials. Fire incidents can lead to substantial financial losses. The timely identification of fire hazards can protect these valuable assets.

**Environmental Protection:** Industrial fires often result in the release of hazardous materials into the environment, causing long-term ecological damage. An early fire detection system can prevent or minimize such releases, contributing to environmental protection.

# About the Project

---

The Industrial Fire Safety System Project is designed to continuously monitor environmental conditions within industrial facilities and provide early detection and alerts for potential fire hazards. It accomplishes this by integrating various sensors, an Arduino Uno microcontroller, and alert mechanisms. A detailed breakdown of the project's components, their roles, and the circuit diagram is given below.

## Components Used:

- i) Arduino Uno
- ii) DHT11 Temperature Sensor
- iii) MQ2 Gas Sensor
- iv) MQ136 Gas Sensor
- v) Flame Sensor
- vi) LED
- vii) Buzzer
- viii) LCD


## Working:

The functions of all the hardware components are described below:


- (i) **Arduino Uno:** The Arduino Uno serves as the central processing unit of the system, responsible for collecting data from the various sensors, processing it, and triggering alerts when abnormal conditions are detected.
- (ii) **DHT11 Temperature Sensor:** The DHT11 measures the ambient temperature within the industrial environment. An abnormal rise in temperature can be an early indicator of a fire hazard.
- (iii) **MQ2 Gas Sensor:** The MQ2 Gas Sensor is designed to detect hazardous gases like Methane, Butane, LPG and Smoke. It plays a critical role in identifying potential gas leaks or emissions that could lead to fire incidents.
- (iv) **MQ136 Gas Sensor:** The MQ136 Gas Sensor complements the MQ2 by detecting another hazardous gas, H<sub>2</sub>S which is used in many industries. Like the MQ2, it helps in identifying gas leaks or unsafe gas concentrations within the industrial setting.
- (v) **Flame Sensor:** The Flame Sensor is designed to detect the presence of an open flame. In industrial settings, the presence of flames when they are not expected can be a direct sign of a fire emergency.
- (vi) **LED, Buzzer and LCD:** LEDs are used to provide visual alerts. When abnormal conditions are detected, the appropriate LED(s) light up, indicating which hazard has been detected.


The Buzzer generates an audible alarm when a potential fire hazard is detected. This auditory alert is essential for drawing immediate attention to the situation. The LCD display is also used as a visual alert.

### Circuit in Fritzing:

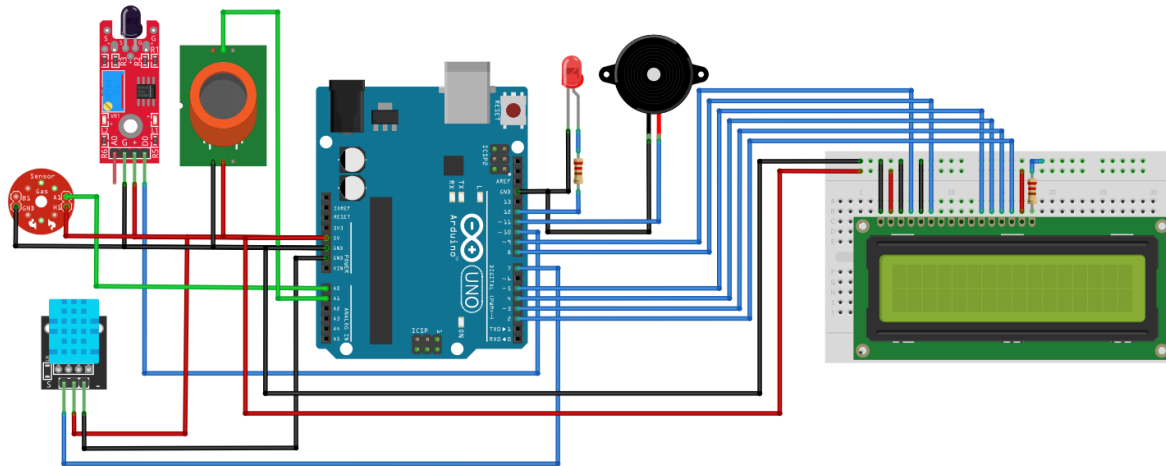

### Circuit in TinkerCad:

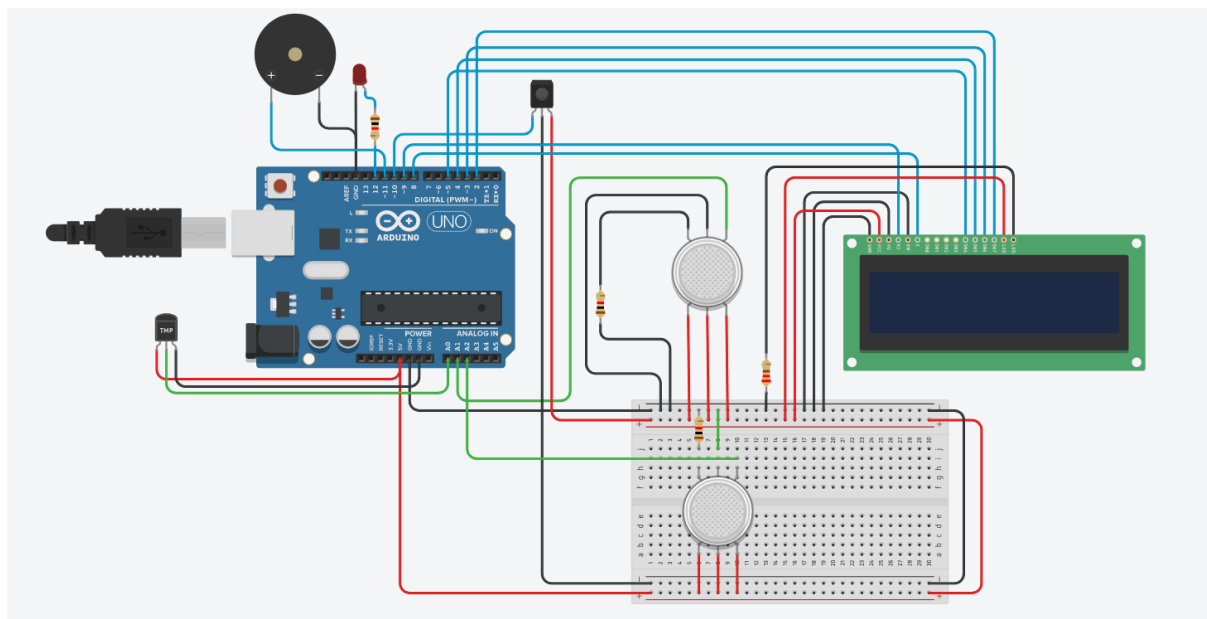

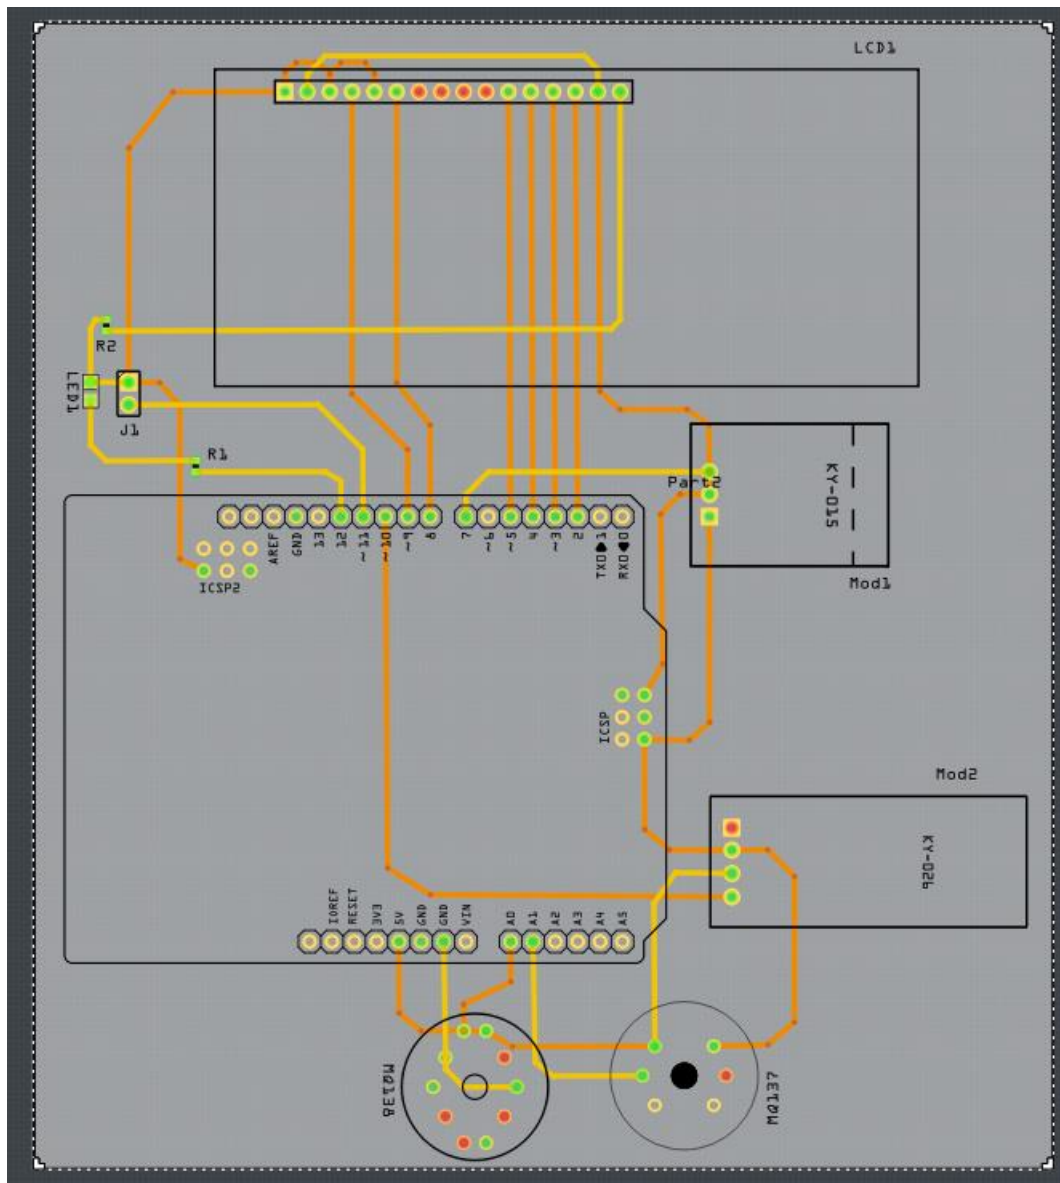**PCB Design:**

## Source Code:

---

```
#include<LiquidCrystal.h>

#include<DHT.h>

#define DHTTYPE DHT11


#define TEMP 7

#define MQ2 A1

#define MQ136 A0

#define Buzzer 11

#define LED 12

#define Gas_Thres 250

#define Temp_Thres 58

#define FlamePin 10

float Temp;

float MQ2_Value;

float MQ136_Value;

int Flame = HIGH;


LiquidCrystal lcd(9, 8, 5, 4, 3, 2);

DHT dht(TEMP, DHTTYPE);


void setup()

{

pinMode(TEMP, INPUT);

pinMode(MQ2, INPUT);

pinMode(MQ136, INPUT);

pinMode(Buzzer, OUTPUT);

pinMode(LED, OUTPUT);

pinMode(FlamePin, INPUT);

lcd.begin(16, 2);
```



```
Serial.begin(9600);
```

```
dht.begin();
```

```
}
```

```
int temperature()
```

```
{
```

```
Temp = dht.readTemperature();
```

```
if (Temp > Temp_Thres) return 1; //if smoke is detected
```

```
else return 0;
```

```
delay (50);
```

```
}
```

```
int mq2()
```

```
{
```

```
MQ2_Value = analogRead(MQ2); // reads the analog value from smoke sensor
```

```
if ( MQ2_Value > Gas_Thres ) return 1; //if smoke is detected
```

```
else return 0;
```

```
delay (50);
```

```
}
```

```
int mq136()
```

```
{
```

```
MQ136_Value = analogRead(MQ136); // reads the analog value from smoke sensor
```

```
if ( MQ136_Value > Gas_Thres ) return 1; //if smoke is detected
```

```
else return 0;
```

```
delay (50);
```

```
}
```



```
int flamesensor()
```



```
{
```

```
Flame = digitalRead(FlamePin);
if (Flame == LOW) return 1;
else return 0;
delay(50);
}

void loop()
{
int t = temperature();
int g1 = mq2();
int g2 = mq136();
int f = flamesensor();
if (t == 1 || g1 == 1 || g2 == 1 || f == 1)
{
digitalWrite(LED,HIGH); // turns the LED on
digitalWrite(Buzzer,HIGH);
lcd.setCursor(2,0);
lcd.print("Fire Alert !!");
lcd.setCursor(1,1);
lcd.print("Evacuate Place !!");
}
else
{
digitalWrite(LED, LOW); // turns the LED off
digitalWrite(Buzzer,LOW);
lcd.clear();
}
delay(10);
}
```

# Output

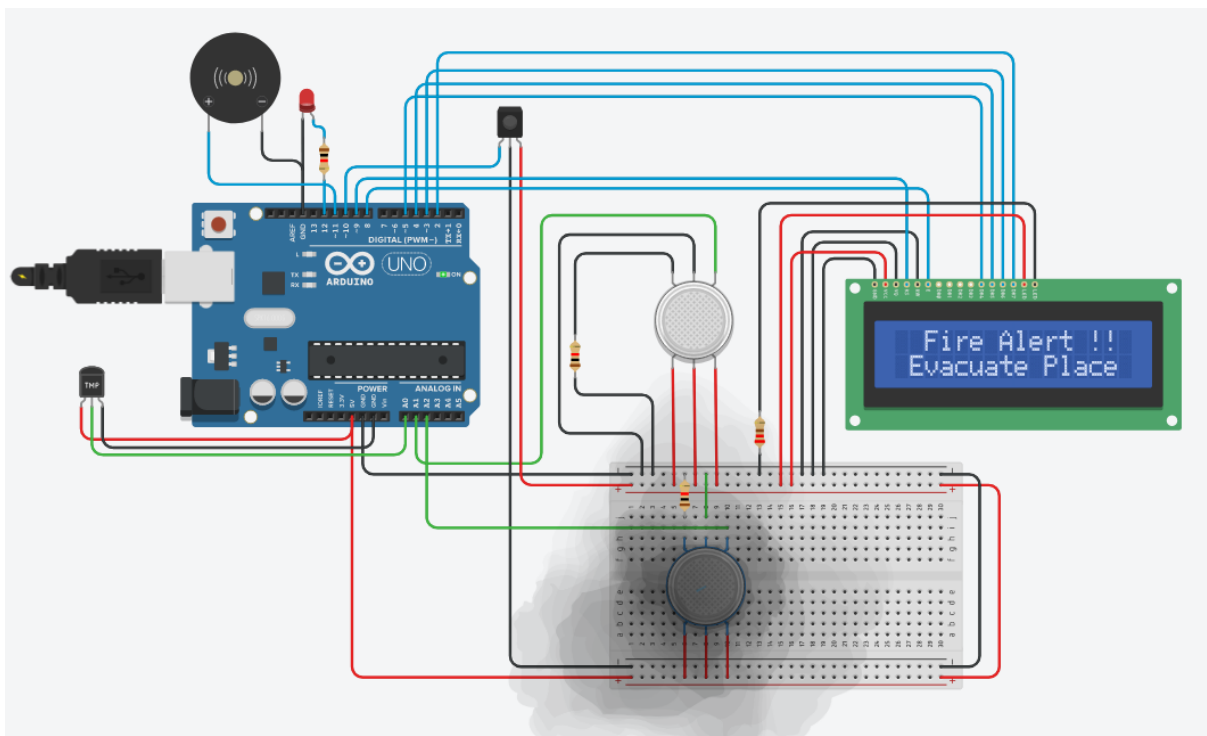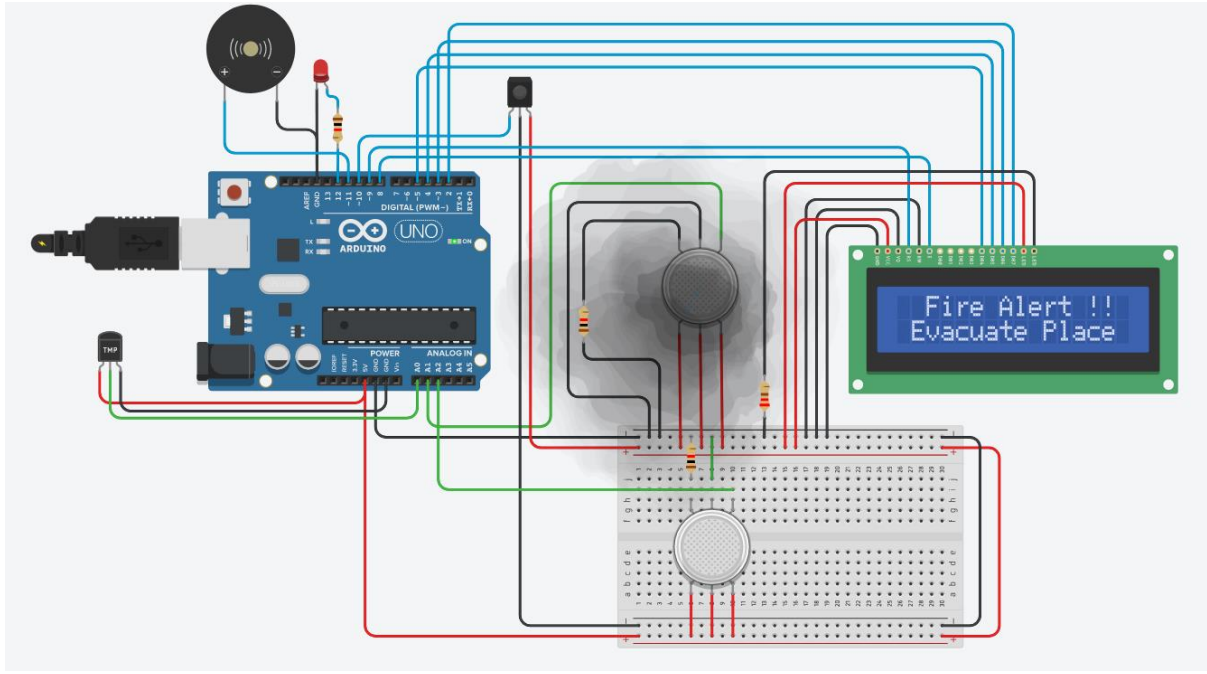

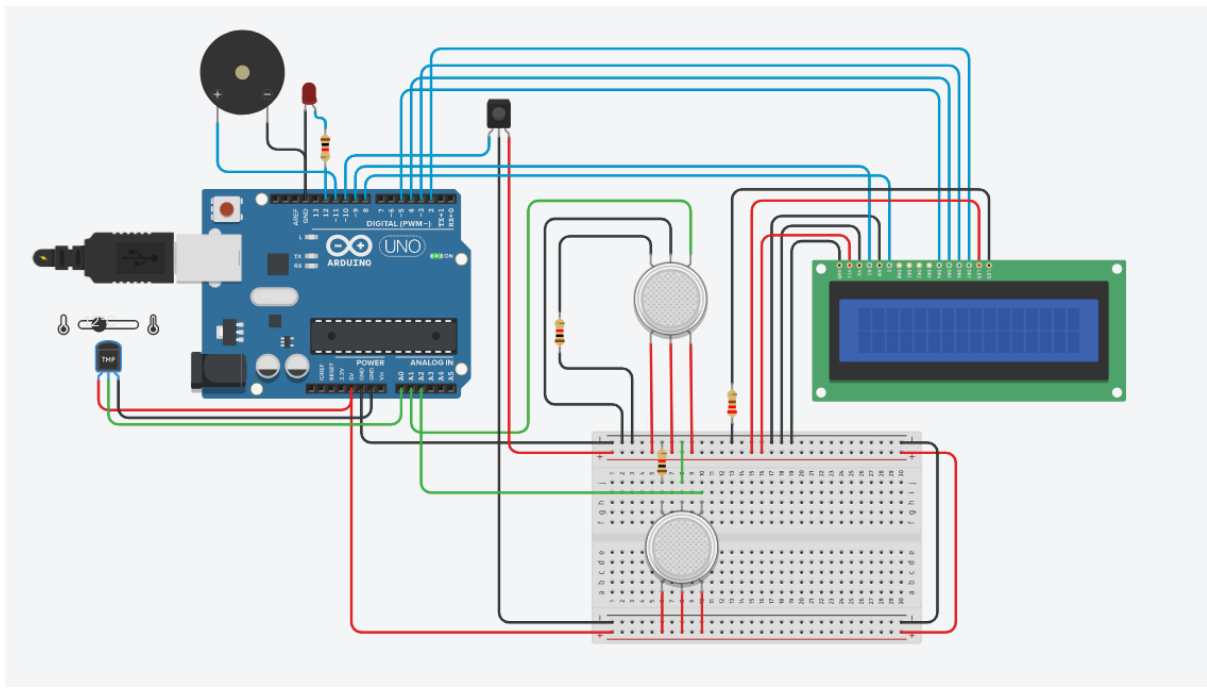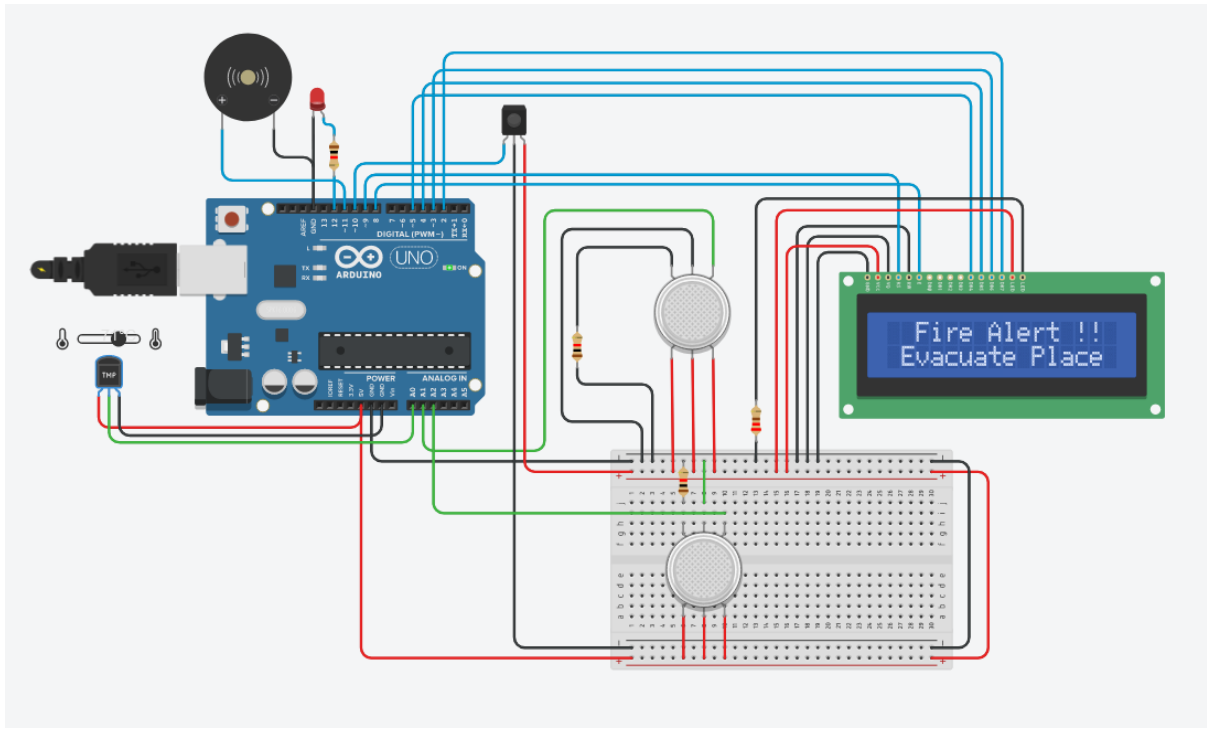

## Conclusion

---

The Industrial Fire Safety System Project represents a significant step forward in addressing the critical issue of fire safety in industrial environments. By integrating a range of sensors, an Arduino Uno microcontroller, and alert mechanisms, this project offers a comprehensive solution for real-time monitoring, early detection, and prompt response to potential fire hazards.

**GitHub Repository Link:**

<https://github.com/ArjGit123/Industrial-Fire-Safety-System-Project>