




Key matrix (right half, COL2ROW, 48 keys)

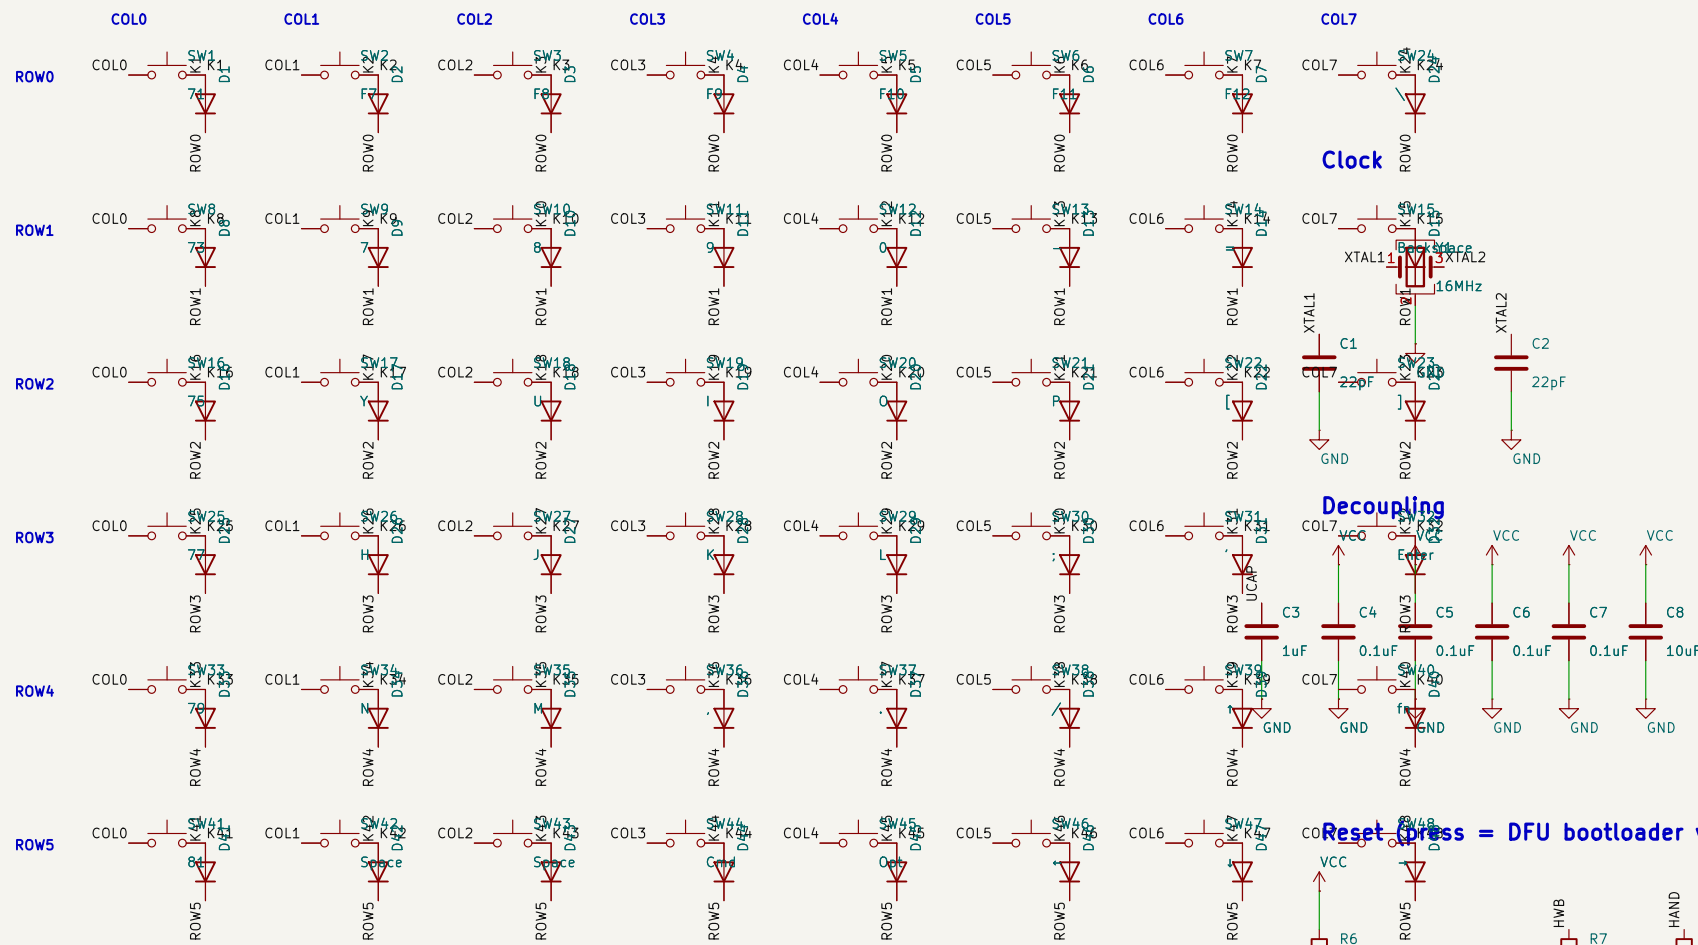


Clock



Decoupling

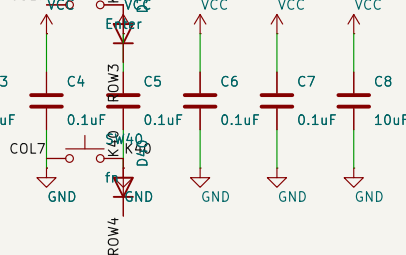


Reset Press = DFU bootloader via HWB

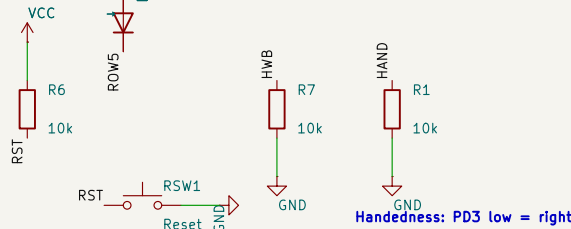


Handedness: PD3 low = right


MCU: ATmega32U4-AU (TQFP-44), 16 MHz, 5 V

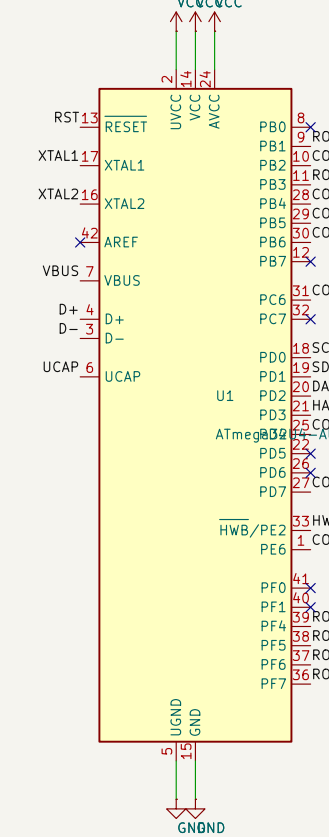


USB-C (USB 2.0 device)

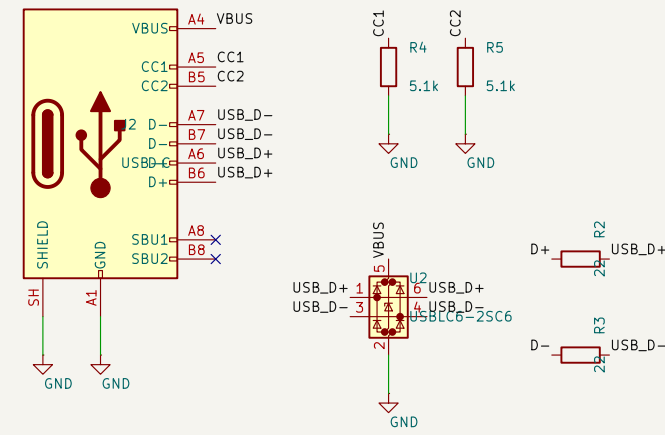

Power

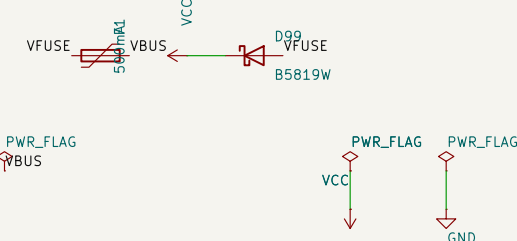

Split link: TRRS 3.5 mm (QMK soft serial)



OLED 0.91" 128x32 (I2C SSD1306)



Thumbwheel sensor AS5600 (I2C 0x36, magnet in the wheel)

