


Key matrix (left half, COL2ROW, 44 keys)

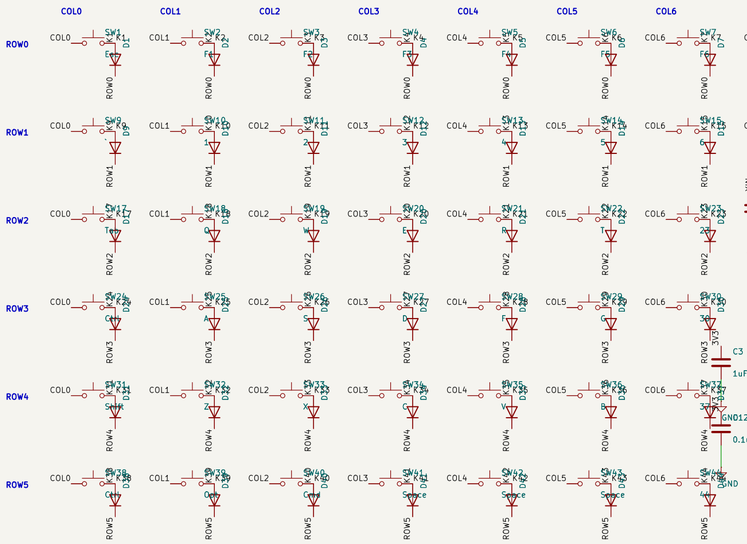


Flash




Clock



Decoupling




MCU: RP2040 (QFN-56), 12 MHz, 3.3 V I/O, 16 MB QSPI flash

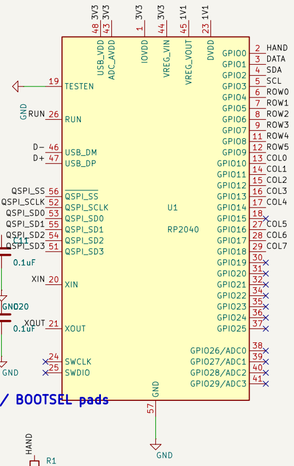


Reset (double-tap = bootloader) / BOOTSEL pads




USB-C (USB 2.0 device)

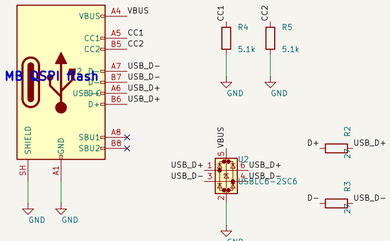

Power




Split link: TRRS 3.5 mm (5 V + QMK serial)




OLED 0.91" 128x32 (I2C, SSD1306, 3.3 V)



Thumbwheel sensor AS5600 (I2C 0x36, 3.3 V: VDD5V tied to VDD3V3)



3.3 V LDO



nrsk	
Sheet: /	
File: nrsk-left.kicad_sch	
Title: nrsk split keyboard – left half	
Size: A2	Date:
KiCad E.D.A. 10.0.6	Id: 1/1
	Rev: 2.0