


Key matrix (right half, COL2ROW, 48 keys)

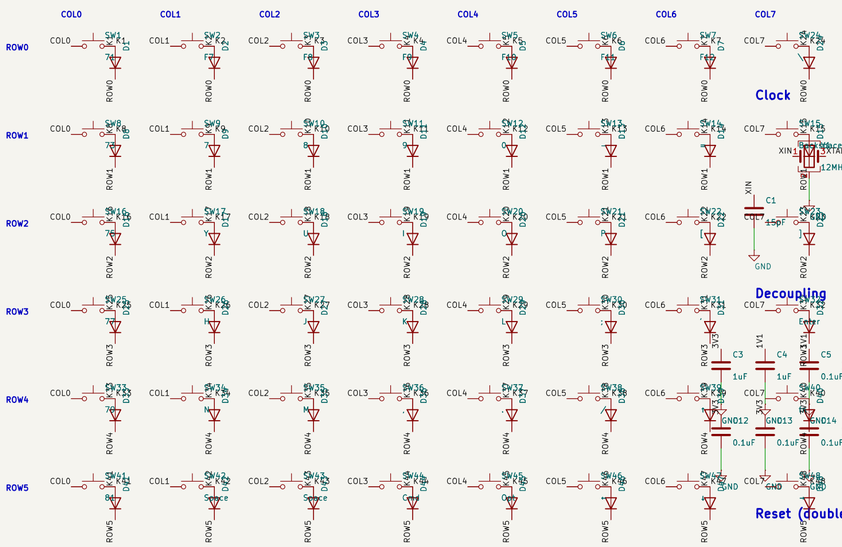


Flash




Clock



Decoupling




MCU: RP2040 (QFN-56), 12 MHz, 3.3 V I/O, 16 MB QSPI flash

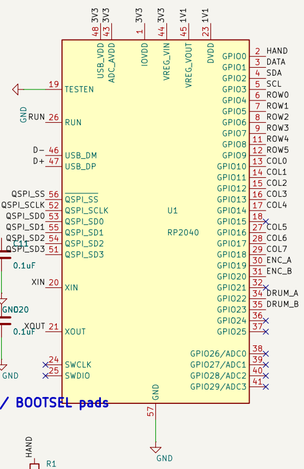


Reset (double-tap = bootloader) / BOOTSEL pads




3.3 V LDO




USB-C (USB 2.0 device)

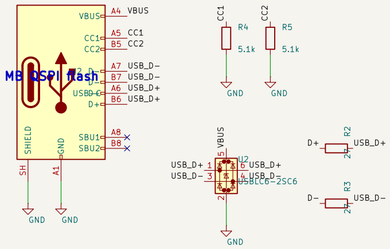

Power



Split link: USB-C (5 V + QMK serial on D+, CC open)



OLED 0.91" 128x32 (I2C, SSD1306, 3.3 V)



Thumbwheel encoder Alps EC05E1220401 (12 detents / 12 pulses, C = common)



Drum dial encoder Alps EC10E1220505 (24 detents / 12 pulses, C = common)



nrsk		
Sheet: /		
File: nrsk-right.kicad_sch		
Title: nrsk split keyboard – right half		
Size: A2	Date:	**Rev: 2.0**
KiCad E.D.A. 10.0.6		Id: 1/1