




Key matrix (left half, COL2ROW, 44 keys)

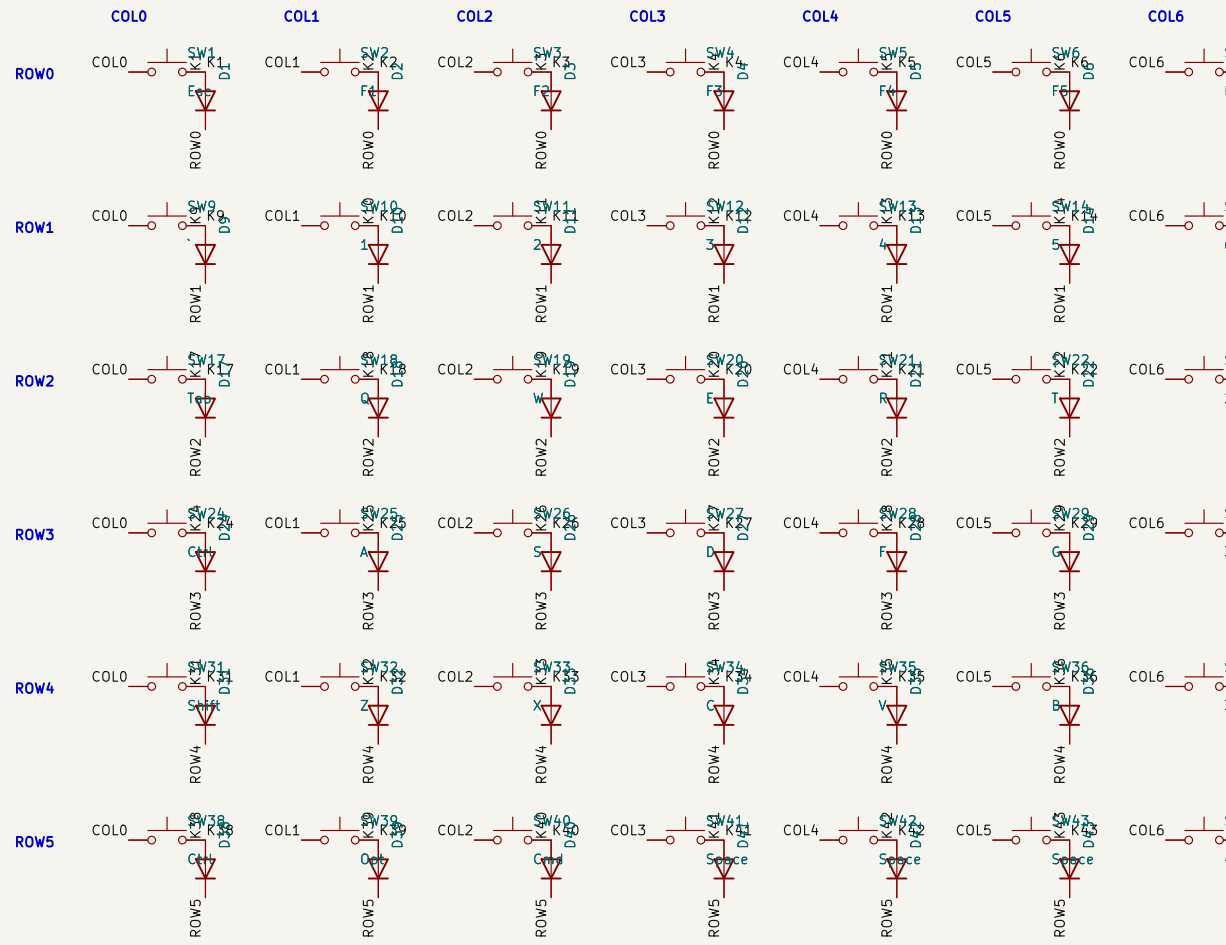


Clock




Decoupling

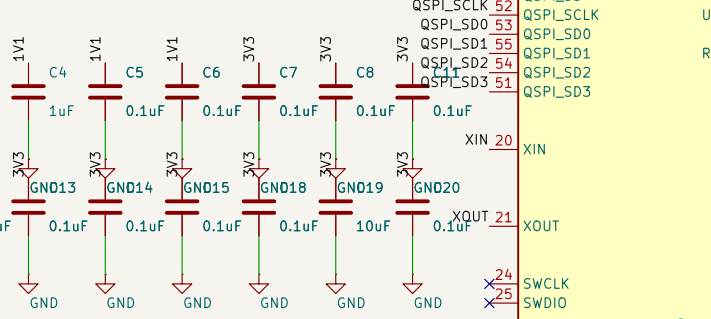


Reset (double-tap = bootloader) / BOOTSEL pads

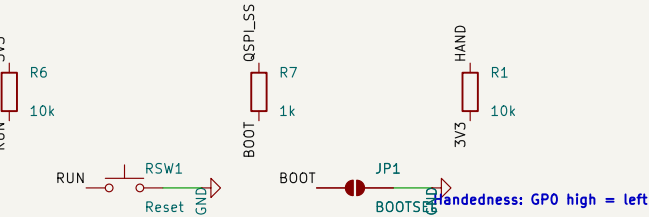


3.3 V LDO




Flash




MCU: RP2040 (QFN-56), 12 MHz, 3.3 V I/O, 16 MB QSPI Flash

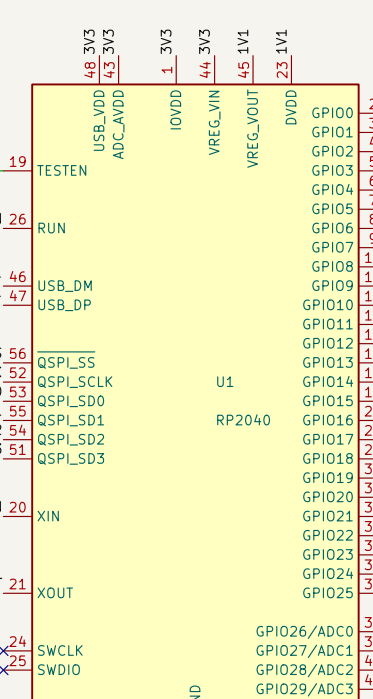


USB-C (USB 2.0 device)

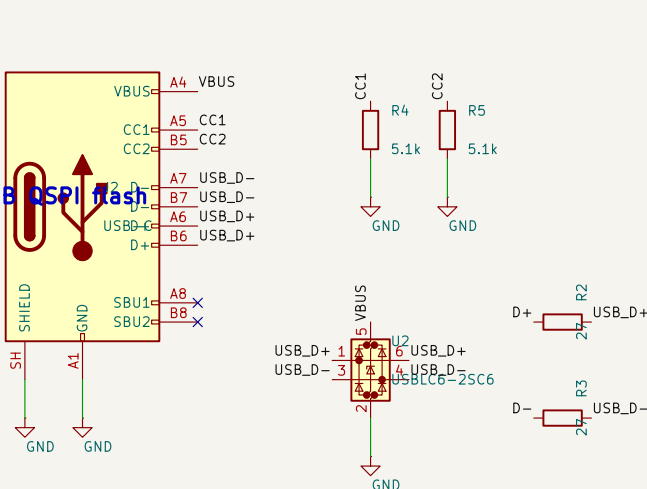

Power

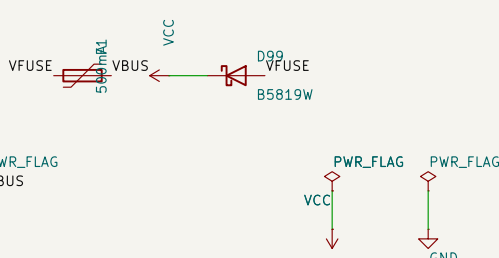

Split link: TRRS 3.5 mm (5 V + QMK serial)



OLED 0.91" 128x32 (I2C, SSD1306, 3.3 V)



Thumbwheel sensor AS5600 (I2C 0x36, 3.3 V: VDD5V tied to VDD3V3)

