


Key matrix (left half, COL2ROW, 44 keys)

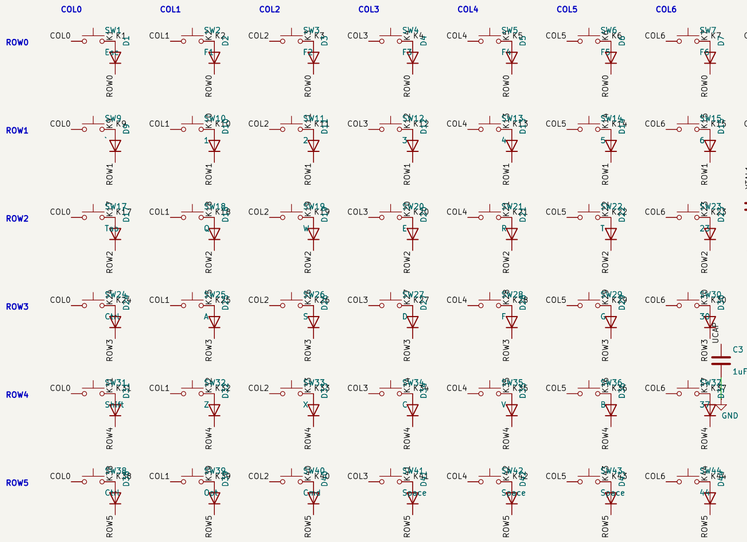


Clock




Decoupling




Reset (press = DFU bootloader via HWB)




MCU: ATmega32U4-AU (TQFP-44), 16 MHz, 5 V

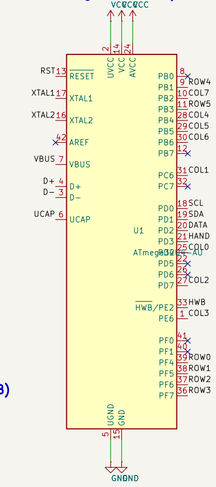


USB-C (USB 2.0 device)

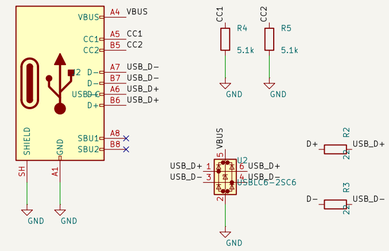


Power




Split link: TRRS 3.5 mm (QMK soft serial)



OLED 0.91" 128x32 (I2C, SSD1306)



Thumbwheel sensor AS5600 (I2C 0x36, magnet in the wheel)



nrsk	
Sheet: /	
File: nrsk-left.kicad_sch	
Title: nrsk split keyboard – left half	
Size: A2	Date:
KiCad E.D.A. 10.0.6	Id: 1/1
	Rev: 2.0