




Key matrix (left half, COL2ROW, 44 keys)

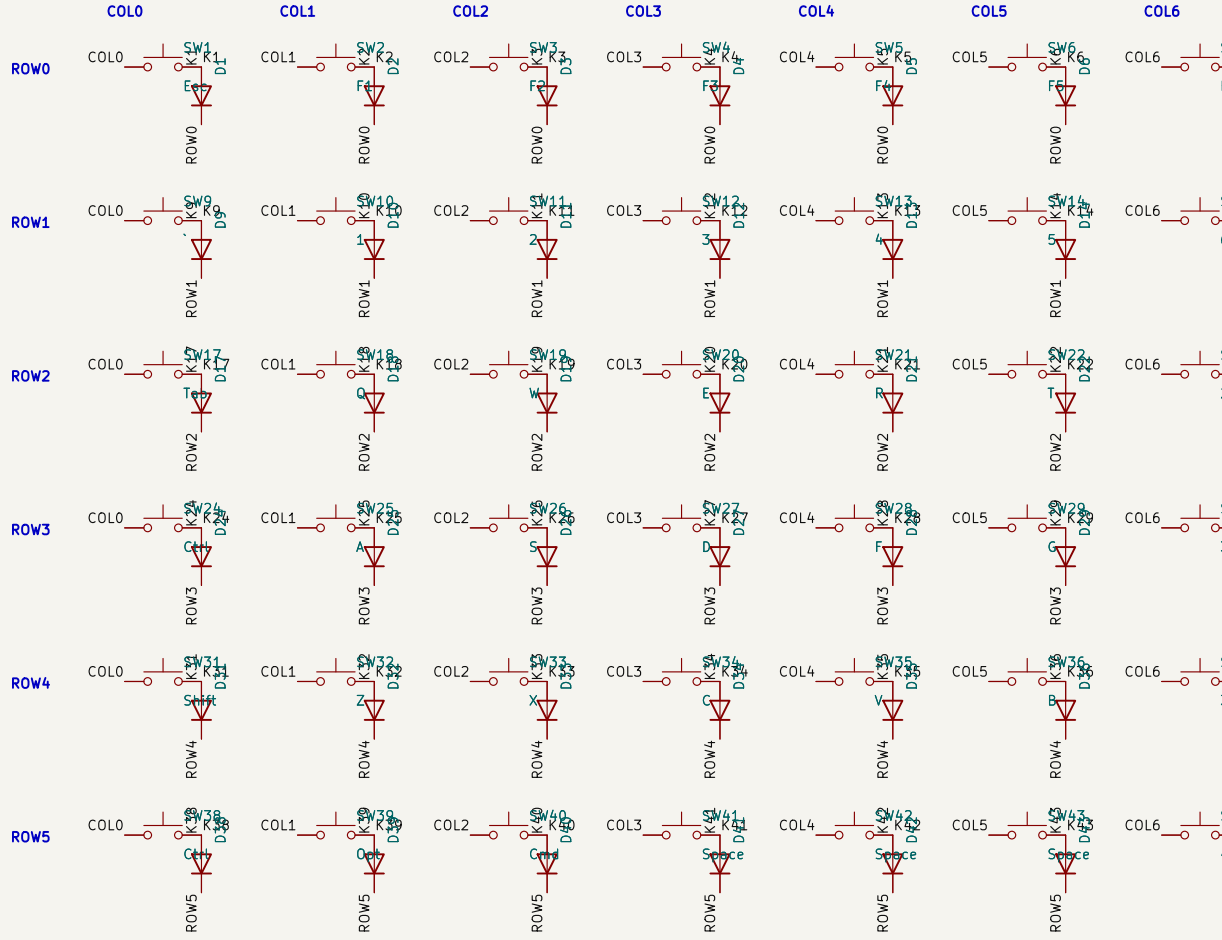


Decoupling

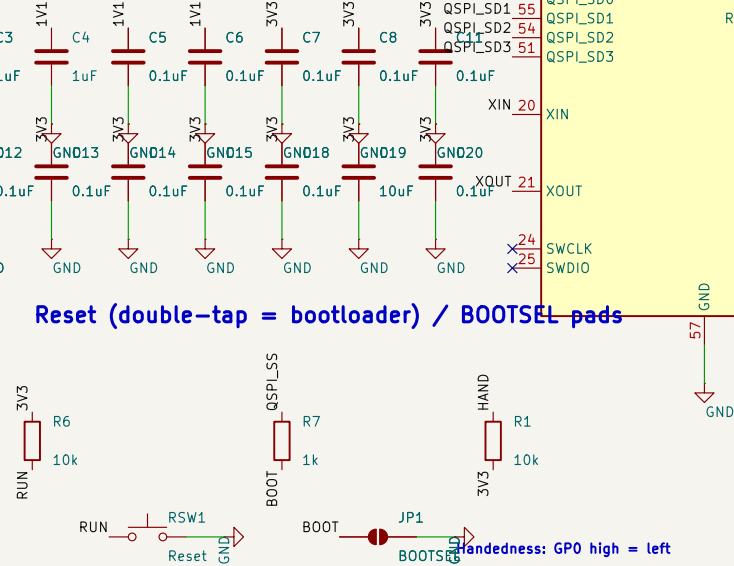


3.3 V LDO




Reset (double-tap = bootloader) / BOOTSEL pads

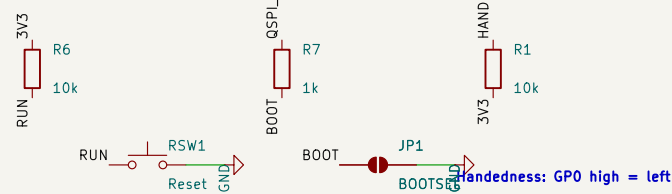


Handedness: GP0 high = left




Clock

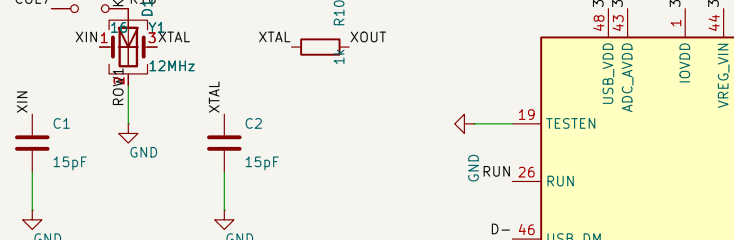


MCU: RP2040 (QFN-56), 12 MHz, 3.3 V I/O, 16 MB QSPI Flash

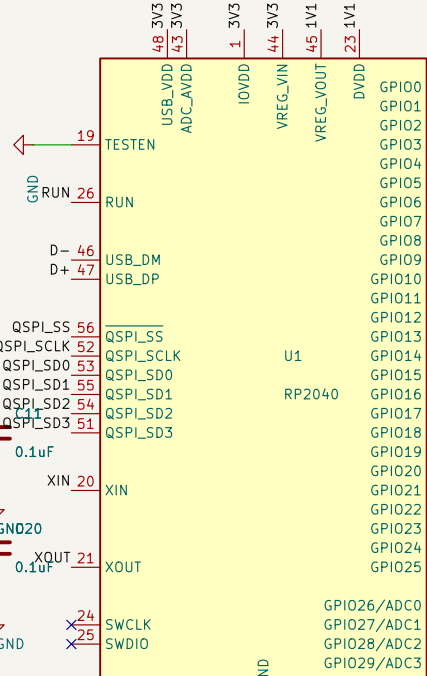


USB-C (USB 2.0 device)

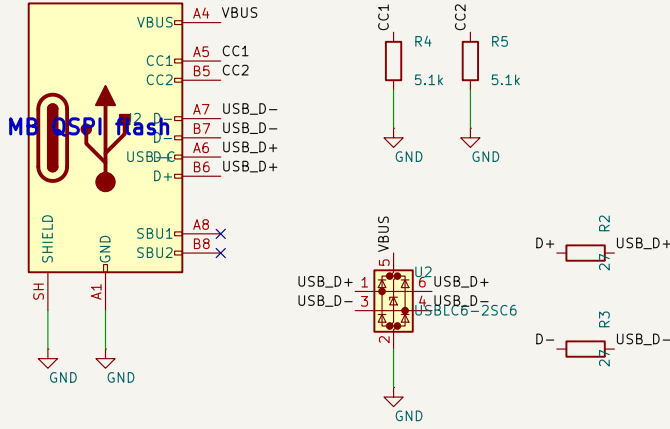


Power



Split link: TRRS 3.5 mm (5 V + QMK serial)



OLED 0.91" 128x32 (I2C, SSD1306, 3.3 V)



Thumbwheel encoder Alps EC05E1220401 (12 detents / 12 pulses, C = common)

