Polar Measurements on a Small Turntable: How Well Can the Rotation Center Be Corrected?

A free-field simulation study of a horizontal three-way monitor, with a boundary-element check

Technical report — simulation code and data:
https://github.com/Arnwald/turntable-rotation-center-study

Abstract

A polar measurement should rotate the loudspeaker about a reference point on its baffle. The turntables available to small manufacturers and hobbyists are usually too small for that: the cabinet ends up centered on the turntable, the rotation axis lies well behind the baffle and, for an asymmetric layout, off to the side. The microphone is then farther away and in another direction than intended. A purely geometric correction — each driver treated as a point source with its own directivity, measurements re-propagated to the intended distance and interpolated to the intended direction — can rebuild the intended polar data. We test it in free field on a simulated horizontal three-way monitor (8-inch woofer, 3-inch dome midrange, 1.1-inch dome tweeter, $440 \times 290 \times 290$ mm closed box) whose cabinet diffraction follows the Distributed Edge Dipole model, for a horizontal orbit from $-180°$ to $180°$ in $10°$ steps at 1 m and 2 m. Without diffraction the correction is essentially exact (below 0.1 dB RMS). With diffraction, about 0.24 dB RMS remains on the summed loudspeaker at 1 m (2.45 dB without correction), concentrated behind the cabinet at mid and high frequencies. The Predicted In-Room Response computed from the corrected data stays within 0.14 dB (1 m) and 0.07 dB (2 m) of the rigorous one, instead of 1.02 dB and 0.48 dB uncorrected. The lateral offset of the microphone is essential: omitting it or entering it with the wrong sign does more harm than not correcting at all. A boundary-element solution of a two-way variant in the same cabinet, with extended rigid radiators and the whole cabinet, confirms these results below about 3 kHz but shows more diffraction above: the rigid dome tweeter radiates wider than its aperture model, the far edge of the baffle adds fine interference ripples, and the corrected PIR then deviates by up to 0.63 dB in narrow bands at 1 m (0.36 dB at 2 m). $5°$ steps, and interpolating levels rather than complex responses, bring it to 0.29 dB.

Contents

1 Introduction **2**

2 The simulated loudspeaker **3**
2.1 Cabinet and layout . . . 3
2.2 Driver responses from the datasheets . . . 3
2.3 Radiators . . . 4
2.4 Cabinet diffraction: the Distributed Edge Dipole model . . . 5
2.5 An illustrative three-way crossover . . . 6

3 Measurement geometry **7**
3.1 Turntable kinematics . . . 7
3.2 What the raw measurement gets wrong . . . 7

4 The correction method **10**
4.1 Inputs and geometry . . . 10
4.2 Point-source re-propagation . . . 10
4.3 Angular interpolation . . . 10
4.4 Implementation . . . 11
4.5 Assumptions . . . 11

5 Simulation protocol **11**

6 Results **12**
6.1 Uncorrected: what the centered setup does to the data . . . 12
6.2 Corrected, direct sound only: the method itself . . . 12
6.3 Corrected, with diffraction: the open question . . . 12
6.4 Angular resolution . . . 14
6.5 Spatial averages and Predicted In-Room Response . . . 14
6.6 Wrong parameters and the laterally shifted microphone . . . 18

7 A boundary-element check **19**
7.1 A two-way variant . . . 19
7.2 The boundary-element solution . . . 20
7.3 What the DED model misses . . . 20
7.4 The correction on the BEM data . . . 21
7.5 What changes . . . 26

8 Discussion **26**

9 Conclusion **28**

A Additional figures **28**

B Reproducibility **30**

1 Introduction

The off-axis behavior of a loudspeaker is measured by turning it in front of a fixed microphone. Standards such as CTA-2034-A place the center of rotation on the baffle, at the reference point (usually the tweeter axis), so that the microphone moves on a circle of constant radius around it. With a large turntable, or a rig that holds the cabinet with its baffle over the axis, that is easy. The turntables most small manufacturers and hobbyists can afford (a few hundred millimeters across) cannot carry a cabinet that overhangs by 30 to 45 cm: the cabinet is centered on the turntable, and the rotation axis passes through the middle of the box (Figure 4).

Two things then go wrong. Off axis, the microphone is no longer at the intended distance from the drivers: farther away behind the cabinet, so the off-axis responses are too low and too late. And the direction in which each driver is seen is no longer the nominal angle. When the drivers are not on the cabinet center line — a horizontal monitor with its woofer beside the midrange-tweeter column, as here — the microphone has to be moved sideways to face the reference point at 0°, and the errors become asymmetric.

A correction can be built from geometry alone. Around each driver, a point source with an arbitrary directivity is assumed; every measurement is moved to the intended distance (a delay and a gain) and the response in the intended direction is interpolated between the two measurements that bracket it. The method needs four numbers per plane: where the rotation axis was relative to the baffle (depth and lateral offset), where each driver is relative to the reference axis, and the microphone distance.

This report checks how well that works. The setting is deliberately idealized: free field (no room, no gating), a loudspeaker simulated from its drivers' datasheets, and a diffraction model for the cabinet edges, which is the open question — the edges radiate from places that are not the driver, so a point-source correction cannot be exact for them. We compare, at 1 m and 2 m, the rigorous measurement (axis on the baffle), the raw measurement with the cabinet centered on the turntable, and the same measurement after correction, driver by driver, for a summed three-way loudspeaker and for the CTA-2034-A spatial averages, Predicted In-Room Response included. We also look at what happens when the correction parameters are wrong, which is the practical risk.

2 The simulated loudspeaker

2.1 Cabinet and layout

The loudspeaker is a horizontal three-way monitor in a closed box of $W \times H \times D = 440 \times 290 \times 290\,\mathrm{mm}$ (24 L net), Figure 1. The woofer is on the left; the midrange and the tweeter are stacked on the right, tweeter on top. All positions are expressed in the *speaker frame*: origin at the center of the front baffle, x to the right as seen from the listening position, y up, z normal to the baffle toward the listener. The cabinet occupies $-D \le z \le 0$ and every driver sits on the baffle plane $z = 0$ (Table 1). The *reference point* $\mathbf{R}$ is on the baffle, on the vertical line through the midrange and tweeter centers, halfway between them; the *reference axis* is the baffle normal through $\mathbf{R}$. The microphone is placed on that axis, at the height of $\mathbf{R}$.

2.2 Driver responses from the datasheets

Each driver is described by its on-axis half-space response $H_i(f)$: complex pressure at $r_{\mathrm{ref}} = 1\,\mathrm{m}$ for 2.83 V, in an infinite baffle. The SPL curves $L_i(f)$ of the three datasheets are vector graphics; they were extracted point by point from the PDF files rather than traced by eye (the CSV files are in the repository). Each curve is taken as the half-space response, interpolated linearly in $\log f$ and extended outside its published range with fixed slopes s_{lo} and s_{hi} (dB per octave):

$$L(f) = L(f_{\min}) + s_{\mathrm{lo}} \log_2 \frac{f}{f_{\min}} \quad (f < f_{\min}), \qquad L(f) = L(f_{\max}) + s_{\mathrm{hi}} \log_2 \frac{f}{f_{\max}} \quad (f > f_{\max}), \tag{1}$$

with $s_{\mathrm{lo}} = +12$ for all three drivers and $s_{\mathrm{hi}} = -24$ (woofer) or -12 (domes). The magnitude $|H_i| = p_{\mathrm{ref}}\, 10^{L_i/20}$ ($p_{\mathrm{ref}} = 20\,\mu\mathrm{Pa}$) is given a minimum phase with the folded real cepstrum: on an N-point DFT grid,

$$c[n] = \mathrm{IDFT}\{\ln |H[k]|\}, \qquad \hat{c}[n] = \begin{cases} c[n] & n = 0,\ n = N/2 \\ 2c[n] & 0 < n < N/2 \\ 0 & N/2 < n < N \end{cases}, \qquad H_{\min}[k] = \exp\left(\mathrm{DFT}\{\hat{c}\}[k]\right), \tag{2}$$

evaluated on a grid eight times finer than the simulation grid to avoid cepstral aliasing.

Table 1: Driver positions in the speaker frame and radiator models.

	x (mm)	y (mm)	radiator
Woofer, Dayton Audio SIG225-4	−85	0	flat piston, $a = \sqrt{S_d/\pi} = 83.8\,\mathrm{mm}$
Midrange, HiVi DM-7600	120	−48.5	equivalent cap, $a = 60\,\mathrm{mm}$, $h = 17.5\,\mathrm{mm}$
Tweeter, SICA LP 90.28/N92	120	81.5	spherical cap, $a = 14\,\mathrm{mm}$, $h = 7.5\,\mathrm{mm}$
Reference point $\mathbf{R}$	120	16.5	—

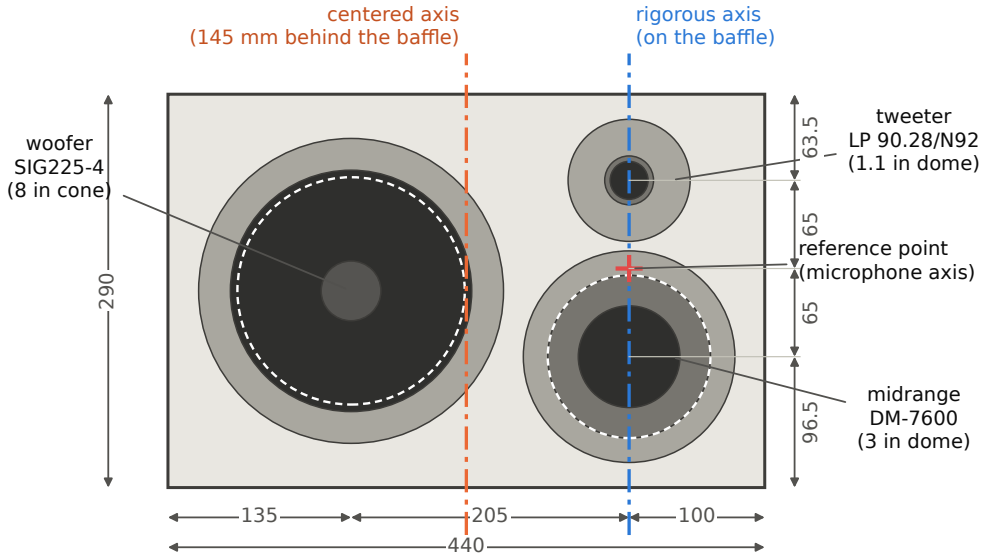


Figure 1: Front view of the simulated monitor (dimensions in mm). Dashed white circles: radiators used in the model (piston of the woofer's S_d, equivalent radiating cap of the midrange). Blue: rotation axis of the rigorous setup, on the baffle through midrange and tweeter. Orange: rotation axis when the cabinet is centered on the turntable, 145 mm behind the baffle.

Woofer in its closed box. The SIG225-4 datasheet curve is close to an infinite-baffle response at low frequency (its low end follows $f_s = 40\,\mathrm{Hz}$, $Q_{ts} = 0.43$). It is moved into the 24 L box with the ratio of the two second-order high-pass functions,

$$H_{\mathrm{woofer}}(f) = H_{\mathrm{ds}}(f)\,\frac{\mathcal{H}(f; f_c, Q_{tc})}{\mathcal{H}(f; f_s, Q_{ts})}, \qquad \mathcal{H}(f; f_0, Q) = \frac{s^2}{s^2 + s/Q + 1},\ s = \mathrm{j}\frac{f}{f_0}, \tag{3}$$

$$\alpha = \frac{V_{as}}{V_b} = \frac{29.7}{24}, \qquad f_c = f_s\sqrt{1+\alpha} = 59.8\ \mathrm{Hz}, \qquad Q_{tc} = Q_{ts}\sqrt{1+\alpha} = 0.64 \tag{4}$$

(lossless box). Both high-pass functions are minimum phase, so the product stays minimum phase. As a check, the Thiele–Small parameters give a mass-controlled sensitivity

$$p = \frac{\rho_0\, S_d\, Bl\, V}{2\pi r\, R_e\, M_{ms}} = 0.75\ \mathrm{Pa} \quad (\rho_0 = 1.204\ \mathrm{kg/m^3}), \tag{5}$$

that is 91.5 dB at 1 m for the datasheet's 91.4 dB.

Band limit. All responses are multiplied by a raised-cosine taper from 20.5 to 23.5 kHz, which keeps the impulse responses band-limited at the 48 kHz sample rate.

Figure 2 compares models and datasheets.

2.3 Radiators

The directivities are the classical far-field ones [4], normalized to 1 on the driver's own axis (θ is the angle from that axis, $k = 2\pi f/c$, $c = 343\,\mathrm{m/s}$).

Cone: rigid flat piston of radius $a = \sqrt{S_d/\pi}$ in an infinite baffle,

$$D_{\mathrm{p}}(\theta, k) = \frac{2J_1(ka\sin\theta)}{ka\sin\theta}. \tag{6}$$

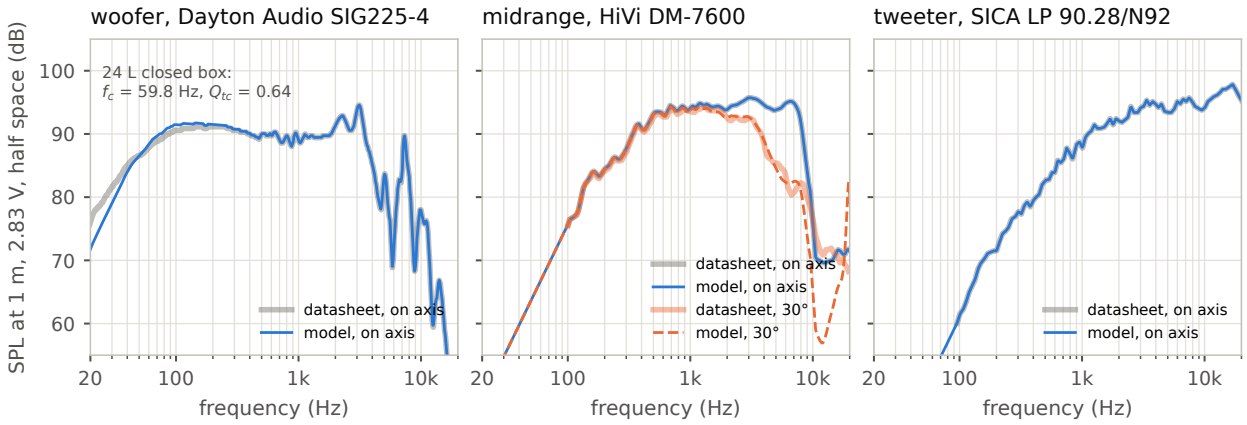


Figure 2: Driver models against the datasheet curves (half space, 1 m, 2.83 V). The woofer is shown in its 24 L closed box. For the midrange, the datasheet also gives the 30° response, which the equivalent radiating cap reproduces to within 0.8 dB RMS between 1.5 and 8 kHz.

Dome: rigid convex spherical cap of base radius a and height h, moving axially. Its far field is the Rayleigh integral over the projected disc, each ring of radius r being advanced by the cap height $z(r)$:

$$A(\theta,k)=\frac{2}{a^2}\int_0^a J_0(kr\sin\theta)\,e^{\mathrm{j}kz(r)\cos\theta}\,r\,\mathrm{d}r, \qquad z(r)=\sqrt{R_s^2-r^2}-(R_s-h), \quad R_s=\frac{a^2+h^2}{2h}, \tag{7}$$

$$D_\mathrm{d}(\theta,k)=\frac{A(\theta,k)}{A(0,k)}. \tag{8}$$

D_d is complex: the protruding center moves the apparent source off axis. With $h=0$ it is the piston. The integral is evaluated with 96-point Gauss–Legendre quadrature.

The midrange's equivalent cap. The DM-7600 sits in a horn-shaped aluminum faceplate. A bare 75 mm dome is far wider than the datasheet's 30° curve (3 dB down at 5 kHz where the datasheet shows 8 dB). Fitting (a,h) of Eq. (7) to the datasheet difference $L_{30^\circ}-L_{0^\circ}$ between 1.5 and 8 kHz gives $a=60$ mm, $h=17.5$ mm (0.83 dB RMS): a 120 mm aperture, the diameter of the faceplate's mouth (the baffle cutout is 120.5 mm). That equivalent cap is used for the midrange. The tweeter, with no off-axis data, uses its own geometry: a 28 mm silk dome, assumed 7.5 mm high.

2.4 Cabinet diffraction: the Distributed Edge Dipole model

The edges of the front baffle are modelled with the Distributed Edge Dipole (DED) approach of Urban *et al.* [1], a refinement of the edge-source picture of Vanderkooy [3]: a line of dipoles along the edges, driven by the pressure the driver produces there. In the form used here, extended to a source of finite size, driver i produces at the microphone position $\mathbf{M}$

$$p_i(\mathbf{M},f)=H_i(f)\,\big[P_{\mathrm{dir},i}(\mathbf{M},f)+P_{\mathrm{edge},i}(\mathbf{M},f)\big], \tag{9}$$

$$P_{\mathrm{dir},i}=D_i(\theta_i,k)\,\frac{1+\cos\theta_i}{2}\,\frac{r_\mathrm{ref}}{r_i}\,e^{-\mathrm{j}kr_i}, \qquad r_i=|\mathbf{M}-\mathbf{S}_i|, \quad \cos\theta_i=\frac{\mathbf{n}\cdot(\mathbf{M}-\mathbf{S}_i)}{r_i}, \tag{10}$$

$$P_{\mathrm{edge},i}=\sum_e Q_{i,e}(f)\,F_e(\mathbf{M})\,\frac{r_\mathrm{ref}}{r_{2,e}}\,e^{-\mathrm{j}kr_{2,e}}, \qquad r_{2,e}=|\mathbf{M}-\mathbf{E}_e|, \quad F_e(\mathbf{M})=-\frac{\mathbf{n}\cdot(\mathbf{M}-\mathbf{E}_e)}{r_{2,e}}, \tag{11}$$

where $\mathbf{S}_i$ is the driver center, $\mathbf{n}=\mathbf{e}_z$ the baffle normal, D_i the radiator directivity, and $\mathbf{E}_e$, Δl_e the midpoints and lengths of the elements along the four edges of the baffle (2 mm elements, 730 in all). The factor $(1+\cos\theta)/2$ is the obliquity of the direct field: 1 on axis, $\frac{1}{2}$ in the baffle plane, 0

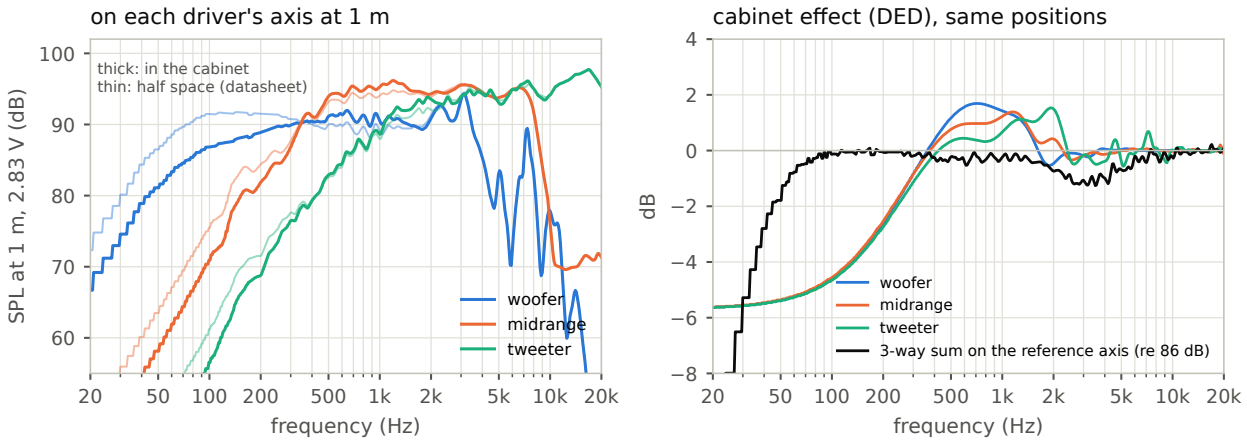


Figure 3: Left: each driver on its own axis at 1 m, in the cabinet (thick) and in half space (thin). Right: their ratio, the cabinet effect according to the DED model (baffle step and edge ripple), and the illustrative three-way sum on the reference axis.

behind; F_e is the edge dipole, zero in the baffle plane and changing sign behind it. The strength of edge element e is

$$Q_{i,e}(f) = C_i\,\Delta l_e\,\frac{G_i(\rho_{i,e}, f)}{A_i(0,k)}, \qquad G_i(\rho, f) = \frac{1}{S_i}\iint_{S_i}\frac{1+\cos\theta_s}{2}\,\frac{e^{-\mathrm{j}kr_1}}{r_1}\,\mathrm{d}S, \tag{12}$$

where the integral runs over the radiating surface (the projected disc, each point raised by the cap height $z(r)$ for a dome), r_1 is the distance from the surface point to the edge point, $\cos\theta_s = -z(r)/r_1$ the obliquity toward it, $\rho_{i,e} = |\mathbf{E}_e - \mathbf{S}_i|$, and $A_i(0,k)$ (Eq. 7; 1 for a piston) refers the edge drive to the on-axis level that H_i describes. The constant

$$C_i = \frac{1}{2\sum_e \Delta l_e\, G_i(\rho_{i,e}, 0)} \tag{13}$$

makes $P_{\mathrm{dir}} + P_{\mathrm{edge}} = \frac{1}{2}$ on axis in the far field at low frequency: the cabinet radiates 6 dB below the half-space response at low frequency (full-space radiation) and reaches it at high frequency — the baffle step.

All paths keep their true length: the edge waves arrive $(r_1 + r_2 - r)/c$ after the direct sound, *at the actual microphone position*. That finite-distance geometry is exactly what a point-source correction cannot reproduce, and the reason for using the DED model here. As in the DED formulation, only the edges of the face that carries the drivers are modelled; behind the baffle the field is the sum of the edge dipoles plus the vanishing direct term.

Numerics. $G_i(\rho, f)\,e^{\mathrm{j}k\rho}$ varies slowly with ρ and f once the common delay ρ/c is removed. It is tabulated on a 1 mm grid of ρ and a 50 Hz grid of f, with a Gauss–Legendre rule in r and a midpoint rule in azimuth over half a turn (the integrand is even), sized for the phase spread $2k_{\max}a$ across the surface ($n_r = \lceil 0.7 \cdot 2k_{\max}a + 16\rceil$, $n_\varphi = \lceil 0.5 \cdot 2k_{\max}a + 16\rceil$); it is then interpolated linearly in ρ and with cubic splines in f. On each driver's axis at 30 m, $P_{\mathrm{dir}} + P_{\mathrm{edge}}$ is at -5.97 dB at 20 Hz for all three drivers, and within 0.3 dB of 0 dB at 10 kHz.

2.5 An illustrative three-way crossover

To look at the summed loudspeaker, each driver is equalized to an acoustic target on the reference axis at 1 m (rigorous setup):

$$T_{\mathrm{woofer}} = \mathrm{LR}_4^{\mathrm{LP}}(450)\,\mathrm{B}_2^{\mathrm{HP}}(40), \quad T_{\mathrm{mid}} = \mathrm{LR}_4^{\mathrm{HP}}(450)\,\mathrm{LR}_4^{\mathrm{LP}}(3000), \quad T_{\mathrm{tweeter}} = \mathrm{LR}_4^{\mathrm{HP}}(3000), \tag{14}$$

with $\mathrm{B}_2^{\mathrm{LP}}(f_0) = 1/(s^2 + \sqrt{2}s + 1)$, $\mathrm{B}_2^{\mathrm{HP}} = s^2/(s^2 + \sqrt{2}s + 1)$, $s = \mathrm{j}f/f_0$, and $\mathrm{LR}_4 = \mathrm{B}_2^2$. The filter of driver i is the minimum-phase filter (Eq. 2) with magnitude $L\,|T_i|/S_i$, where S_i is the 1/6-octave smoothed on-axis magnitude of the driver and L corresponds to 86 dB SPL. The summed response is $p_{\mathrm{sys}} = \sum_i X_i\, p_i$. The same filters are used in every case: only the measurements change. The design is not optimized (Figure 3, right) and does not need to be.

3 Measurement geometry

3.1 Turntable kinematics

The turntable axis is vertical, at $\mathbf{A} = (a_x, \cdot, a_z)$ in the speaker frame. The microphone is fixed in the room; at 0° it is on the reference axis, at distance d from the baffle: $\mathbf{M}_0 = (x_R,\, y_R,\, d)$. Turning the loudspeaker by θ moves the microphone, seen from the loudspeaker, by $-\theta$ about the axis. With positive angles bringing the microphone toward $+x$ (the midrange/tweeter side):

$$\begin{aligned} x(\theta) &= a_x + (x_R - a_x)\cos\theta + (d - a_z)\sin\theta, \\ z(\theta) &= a_z - (x_R - a_x)\sin\theta + (d - a_z)\cos\theta, \end{aligned} \qquad y(\theta) = y_R. \tag{15}$$

- **Rigorous setup**: $\mathbf{A}$ on the reference point, $(a_x, a_z) = (x_R, 0)$. The microphone stays on the circle of radius d around $\mathbf{R}$: $(x, z) = (x_R + d\sin\theta,\ d\cos\theta)$.
- **Centered setup**: the cabinet is centered on the turntable, $(a_x, a_z) = (0, -D/2)$, i.e. 145 mm behind the baffle and 120 mm to the left of the reference axis. The microphone has been moved 120 mm sideways so that it faces the reference point at 0° (Figures 4 and 5).

3.2 What the raw measurement gets wrong

Seen from a driver at $\mathbf{S}$, the microphone of the centered setup is at a distance $\rho_k = |\mathbf{M}(\theta_k) - \mathbf{S}|$ and in a direction φ_k that differ from the intended ones (Figure 6). Figure 7 and Table 2 give the consequences in the horizontal plane: the raw off-axis responses are up to 2.5–2.8 dB too low and almost 1 ms late behind the cabinet at 1 m, and the direction is wrong by up to 15°. At 2 m the level and direction errors halve; the delay does not (it is set by the axis offset, not by the distance).

Table 2: Range of the geometric errors of the raw measurement (centered setup).

driver	d	level (dB)	delay (ms)	direction (°)
tweeter / midrange	1 m	−2.54 to +0.33	−0.11 to +0.99	−3.4 to +15.4
woofer	1 m	−2.81 to +0.17	−0.06 to +0.94	−5.2 to +14.4
tweeter / midrange	2 m	−1.35 to +0.17	−0.12 to +0.98	−1.8 to +8.2
woofer	2 m	−1.41 to +0.13	−0.09 to +0.95	−2.3 to +7.9

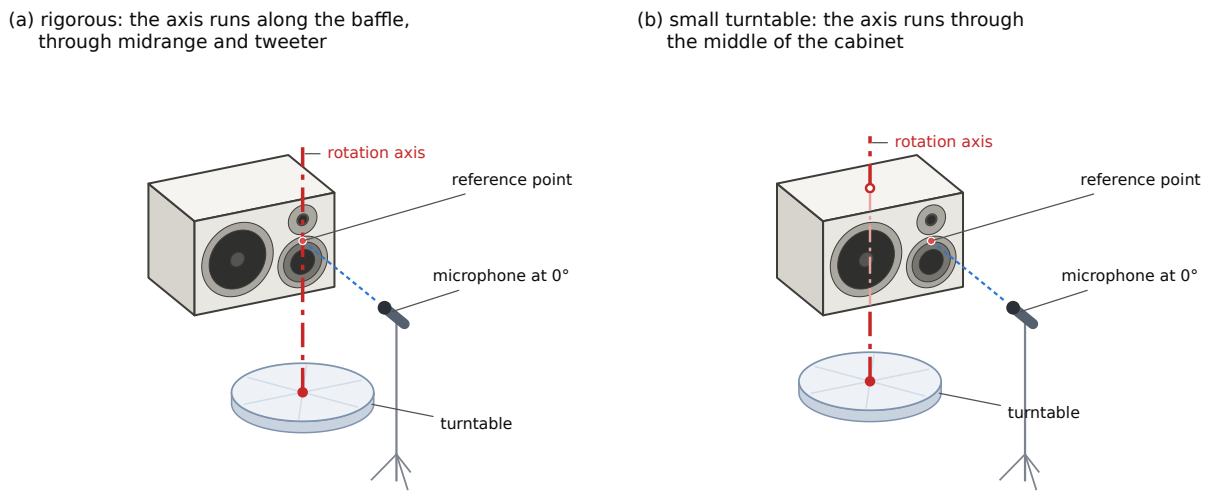


Figure 4: The two setups, with the loudspeaker raised above the disc that stands for the turntable. Dash-dotted red: the rotation axis — (a) along the baffle, through the midrange and the tweeter; (b) through the middle of the cabinet (lighter where it is hidden inside the box). The microphone faces the reference point (red dot) at 0° in both cases.

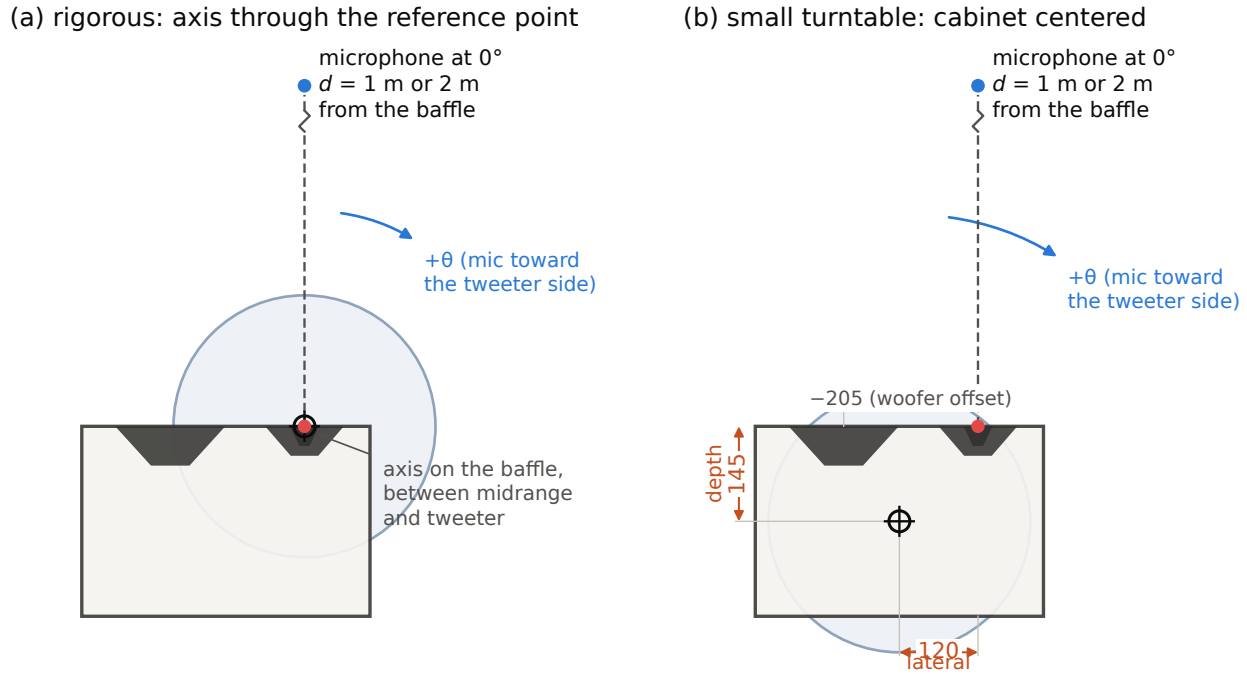


Figure 5: Top views to scale (turntable 400 mm across; microphone distance not to scale). In (b) the correction needs the depth (rotation axis to baffle, 145 mm), the lateral offset (rotation axis to reference axis, +120 mm, positive toward the side the microphone faces at +90°), each driver's offset from the reference axis (−205 mm for the woofer, 0 for midrange and tweeter) and the microphone distance.

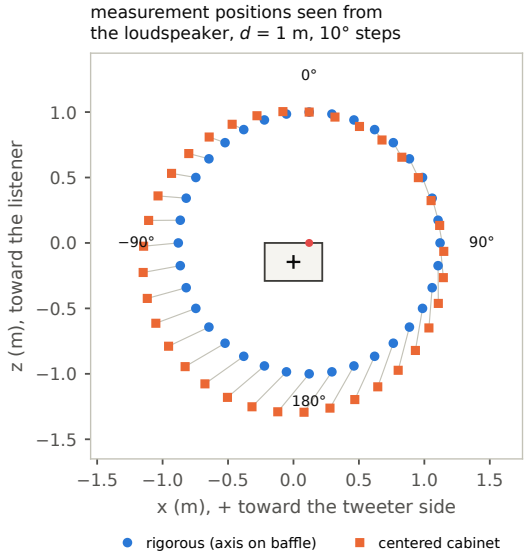


Figure 6: Microphone positions relative to the loudspeaker, to scale, at 1 m. Blue: rigorous setup, a circle of 1 m around the reference point. Orange: centered setup, a circle of 1.15 m around the middle of the cabinet. Gray segments join the positions with the same nominal angle.

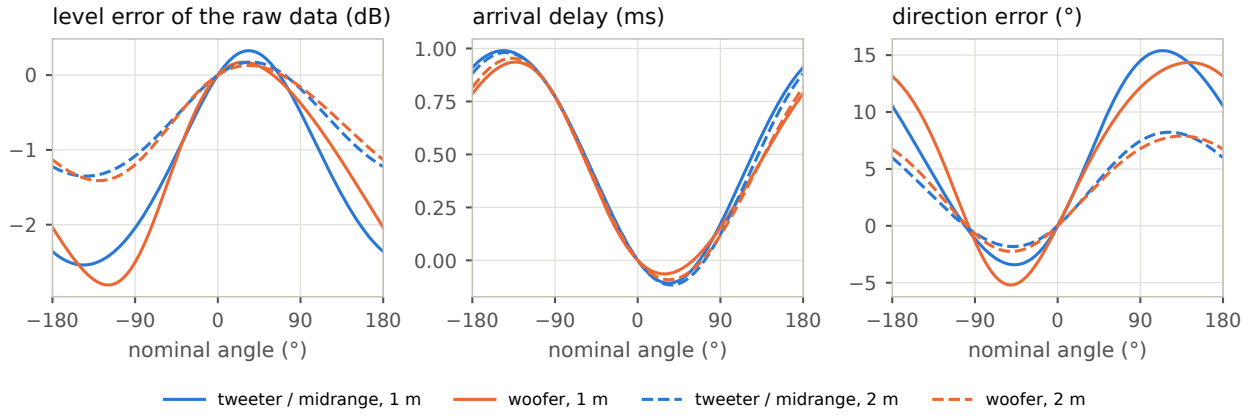


Figure 7: Errors of the raw measurement in the centered setup, seen from the drivers: level ($20 \log_{10}$ of the distance ratio), extra arrival delay and direction error, against the nominal angle.

4 The correction method

The correction rebuilds, for each nominal angle, the response that would have been measured at the ideal position. It works plane by plane and driver by driver.

4.1 Inputs and geometry

In the plane of rotation, take a frame with the rotation axis at the origin, y toward the front and x toward the *+ side* (the side the microphone faces at $+90°$). The user provides

- the depth δ: from the rotation axis to the baffle (positive when the axis is behind it);
- the lateral offset ℓ: from the rotation axis to the reference axis, positive toward the + side;
- the driver offset o: from the reference axis to the driver, positive toward the + side;
- the microphone distance r_0 from the baffle at $0°$.

Then the reference point is $\mathbf{R} = (\ell, \delta)$, the driver $\mathbf{S} = \mathbf{R} + (o, 0)$, and

$$\text{measured position:} \quad \mathbf{M}_k = \mathcal{R}(\theta_k)\,(\ell,\ \delta + r_0), \tag{16}$$

$$\text{ideal position:} \quad \mathbf{M}^*(\theta) = \mathbf{R} + r_0(\sin\theta,\ \cos\theta), \tag{17}$$

with the rotation $\mathcal{R}(\theta)(x, y) = (x\cos\theta + y\sin\theta,\ -x\sin\theta + y\cos\theta)$ (positive angles toward the + side). The $0°$ measurement is on the reference axis, ℓ away from the rotation axis: the lateral shift of the microphone is part of the model. Seen from the driver, every position has a direction and a distance,

$$\varphi = \operatorname{atan2}(M_x - S_x,\ M_y - S_y) \ \text{ (unwrapped to within } \pi \text{ of } \theta), \qquad \rho = |\mathbf{M} - \mathbf{S}|. \tag{18}$$

For the setup of Figure 5(b): $\delta = 145\,\text{mm}$, $\ell = +120\,\text{mm}$, $o = -205\,\text{mm}$ for the woofer and 0 for the midrange and tweeter, $r_0 = 1000$ or $2000\,\text{mm}$.

4.2 Point-source re-propagation

Around each driver the response is assumed to be that of a point source with a directivity,

$$h(\varphi, \rho, t) = \frac{g(\varphi,\ t - \rho/c)}{\rho}, \tag{19}$$

so a measurement taken at (φ_k, ρ_k) is moved to the target distance ρ^* by a delay and a gain:

$$h_{k\to *}(t) = \frac{\rho_k}{\rho^*}\ h_k\!\left(t - \frac{\rho^* - \rho_k}{c}\right). \tag{20}$$

4.3 Angular interpolation

The measurements, sorted by φ_k, serve as supports (for a full circle, copies at $\varphi_k \pm 2\pi$ close the loop). For the target direction φ^* the two bracketing supports a, b are interpolated linearly *after* both have been moved to ρ^*, so that they are in time and do not comb-filter:

$$h^*(t) = (1 - u)\,h_{a\to *}(t) + u\,h_{b\to *}(t), \qquad u = \frac{\varphi^* - \varphi_a}{\varphi_b - \varphi_a}. \tag{21}$$

Outside the measured range the nearest support is used. The $0°$ measurement is the reference and is never changed. A measurement copied by symmetry at $-\theta$ stands for the mirror image of the one at θ and is placed at $(-\varphi_k, \rho_k)$ of that one.

4.4 Implementation

The fractional delays are applied as linear phases. With $\tau_k = (\rho^* - \rho_k) f_s / c$ samples, $p = \lceil \max |\tau_k| \rceil + 1$ samples of margin and an FFT length $N_c = 2^{\lceil \log_2(L+2p+64) \rceil}$ (L the longest impulse response),

$$H^*[m] = \sum_{\text{supports}} g_k \, X_k[m] \, e^{-\mathrm{j}2\pi \tilde{m}(\tau_k + p)/N_c}, \qquad \tilde{m} = \begin{cases} m & m \le N_c/2 \\ m - N_c & m > N_c/2 \end{cases}, \tag{22}$$

with g_k the interpolation weight times ρ_k/ρ^* and X_k the DFT of the zero-padded measurement; the corrected impulse response is $\mathrm{Re}\,\mathrm{IDFT}\{H^*\}$ from sample p on.

4.5 Assumptions

The method assumes a point source on the baffle plane whose far-field directivity does not depend on distance, and ignores what is outside the plane of rotation. The cabinet edges violate the first assumption; the vertical offsets between drivers and microphone (here ±65 mm for the domes), the third.

5 Simulation protocol

Measurements. Horizontal orbit from −180° to 180° in 10° steps (36 positions; ±180° is one position), microphone at $d = 1$ m and $d = 2$ m from the baffle, at the reference height. For every position, Eq. (9) gives the complex spectrum of each driver on a 16 384-point grid at 48 kHz (2.93 Hz resolution); the impulse responses are its inverse real FFT (341 ms, far longer than any delay or decay).

Cases.

- **rigorous**: axis on the reference point — the reference;
- **uncorrected**: cabinet centered, microphone moved onto the reference axis;
- **corrected**: the same data after the correction with the true parameters;
- **direct sound only**: the three cases again with $P_{\text{edge}} = 0$, to separate the correction's own errors from those due to diffraction;
- **variants**: corrected with wrong parameters (lateral offset omitted or with the wrong sign, woofer offset omitted, depth or lateral offset off by ±10 mm, microphone distance off by +20 mm), and with a 5° orbit.

Metrics. Power spectra are smoothed to 1/24 octave,

$$P_X(\theta, f) = \left\langle |p_X(\theta, f')|^2 \right\rangle_{f' \in [f\,2^{-1/48},\, f\,2^{1/48}]}, \tag{23}$$

and compared with the rigorous case through the level error

$$\Delta L_X(\theta, f) = 10 \log_{10} \frac{P_X(\theta, f)}{P_{\text{rigorous}}(\theta, f)} \text{ dB}. \tag{24}$$

Statistics (RMS, 95th percentile, maximum of $|\Delta L|$) are taken over the points that matter: in the driver's band (woofer 50 Hz–1 kHz, midrange 300 Hz–6 kHz, tweeter 2–20 kHz, summed loudspeaker 50 Hz–20 kHz), and no more than 20 dB below the rigorous on-axis response at the same frequency (this leaves out the deep nulls of a beaming cone, where a fraction of a degree changes the level by tens of dB).

Table 3: Sound-power weights of the horizontal orbit (CTA-2034-A Appendix C), normalized over the 36 directions; $w(180° - \theta) = w(\theta)$.

0°	0.0012	10°	0.0095	20°	0.0180	30°	0.0248	40°	0.0301
50°	0.0338	60°	0.0364	70°	0.0381	80°	0.0390	90°	0.0394

CTA-2034-A curves from the horizontal orbit. Only the horizontal orbit is measured, so the standard's curves [2] are estimated from it (all averages on squared pressures):

$$\mathrm{LW}^2 = \tfrac{1}{7} \textstyle\sum_{\theta \in \{0,\pm10,\pm20,\pm30\}} |p(\theta)|^2, \tag{25}$$

$$\mathrm{ER}^2 = \tfrac{1}{3}(\mathrm{FW}^2 + \mathrm{SW}^2 + \mathrm{RW}^2), \tag{26}$$

$$\mathrm{SP}^2 = \frac{\sum_\theta w(\theta)\,|p(\theta)|^2}{\sum_\theta w(\theta)}, \tag{27}$$

$$\mathrm{PIR}^2 = 0.12\,\mathrm{LW}^2 + 0.44\,\mathrm{ER}^2 + 0.44\,\mathrm{SP}^2, \qquad \mathrm{DI} = 10 \log_{10} \frac{\mathrm{LW}^2}{\mathrm{SP}^2}, \tag{28}$$

where the front-wall (FW), side-wall (SW) and rear-wall (RW) groups are themselves RMS averages over the angles 0, ±10, ±20, ±30° (FW), ±40 to ±80° (SW) and ±90, 180° (RW). The standard adds the ±10° vertical directions to the listening window and the floor and ceiling bounces (vertical orbit) to the early reflections; using the horizontal weights alone for the sound power amounts to assuming the vertical orbit equal to the horizontal one. The sound-power weights are those of the standard's Appendix C,

$$w(\theta) = \Omega(\theta + 5°) - \Omega(\theta - 5°), \qquad \Omega(\alpha) = 4C - 2\pi, \tag{29}$$

with $\Omega(\alpha)$ the solid angle of the spherical square bounded by the great circles at $\pm\alpha$ horizontally and vertically (C its corner angle), symmetric about 90° and doubled at 90° (Table 3). These estimates are the same for every case, so their differences measure the measurement geometry only.

6 Results

6.1 Uncorrected: what the centered setup does to the data

Figure 8 (center column) and Figure 9 show the uncorrected data against the rigorous ones. Off axis the responses are too low — by the distance ratio, up to 2.5 dB behind the cabinet at 1 m — and, where the response changes quickly with angle (beaming of the woofer and of the midrange's horn-loaded dome, diffraction ripple behind the cabinet), they show features of the wrong direction. Within the relevant points the summed loudspeaker is off by 2.45 dB RMS at 1 m and 1.24 dB at 2 m (Table 4).

6.2 Corrected, direct sound only: the method itself

Without edge diffraction every driver is exactly a point source with a directivity, as the correction assumes. What remains is the interpolation between measured directions and the vertical offsets that the planar model ignores: 0.02–0.08 dB RMS and 0.6 dB at worst (Table 4, "direct only"). Moving every driver to the microphone height changes the RMS figures by less than 0.01 dB: the out-of-plane offsets are negligible at 1 m and beyond. In this idealized world the correction is, for practical purposes, exact.

6.3 Corrected, with diffraction: the open question

With the cabinet edges, the residual grows: 0.40 dB RMS for the tweeter and 0.24 dB for the summed loudspeaker at 1 m, with local deviations up to 3.2 dB (Table 4, Figures 10 and 11).

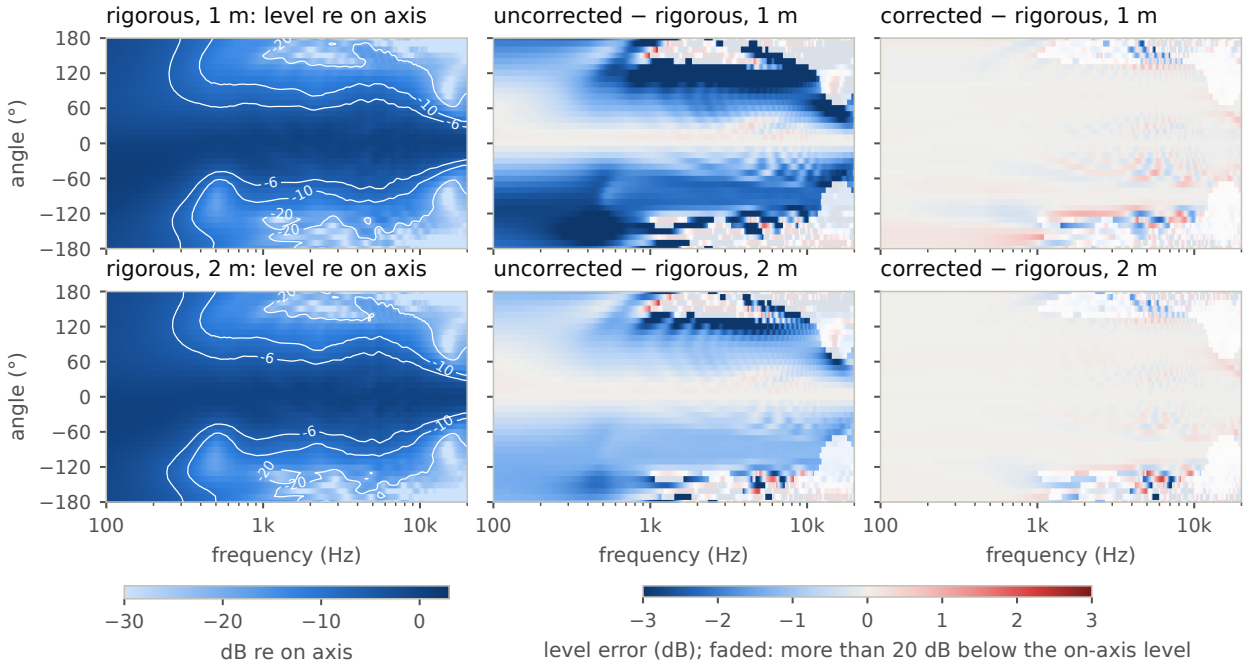


Figure 8: Summed loudspeaker. Left: rigorous horizontal polar map, normalized to the on-axis response (contours at −6, −10, −20 dB). Center and right: level error of the uncorrected and corrected data; points more than 20 dB below the on-axis level are faded.

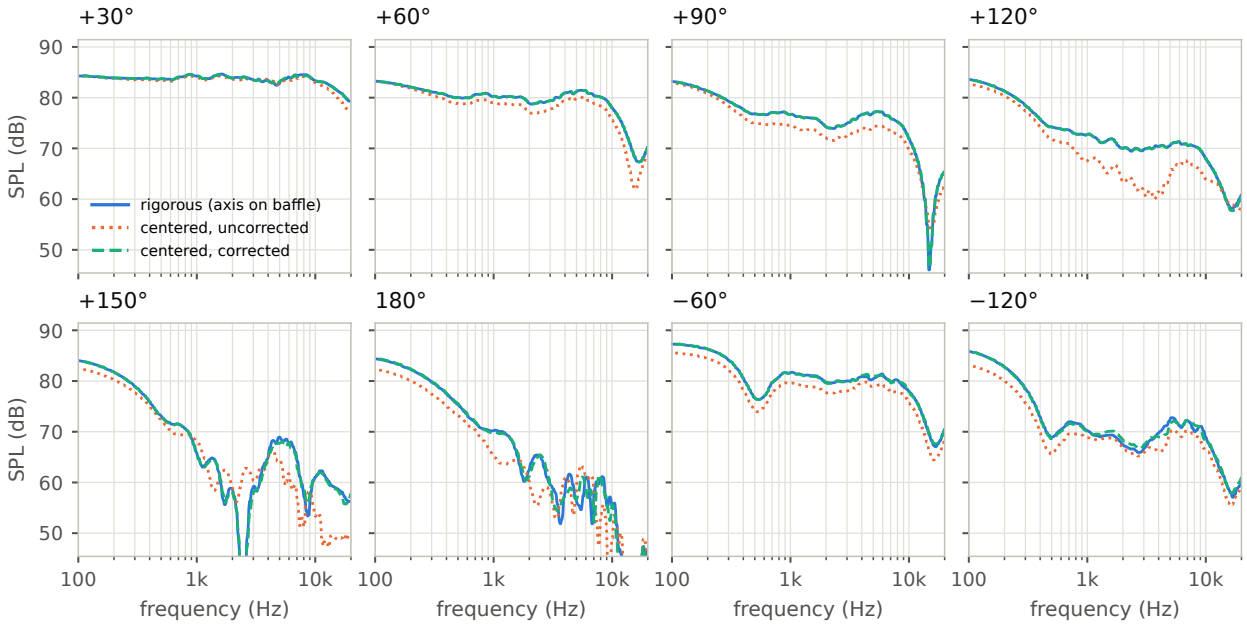


Figure 9: Summed loudspeaker at selected angles, 1 m, 1/12-octave smoothing.

Table 4: Level error $|\Delta L|$ against the rigorous measurement over the relevant points (dB): RMS, 95th percentile and maximum.

			uncorrected			corrected		
d	model	driver	RMS	p95	max	RMS	p95	max
1 m	DED	woofer	1.84	2.93	8.7	0.09	0.20	0.4
1 m	DED	midrange	2.39	4.27	20.1	0.21	0.38	2.1
1 m	DED	tweeter	3.30	6.79	22.8	0.40	0.96	3.2
1 m	DED	3-way sum	2.45	4.07	25.6	0.24	0.42	3.1
1 m	direct only	woofer	2.95	7.10	9.1	0.03	0.07	0.1
1 m	direct only	midrange	2.76	6.16	9.2	0.08	0.14	0.6
1 m	direct only	tweeter	2.72	5.93	9.2	0.05	0.09	0.3
1 m	direct only	3-way sum	2.77	6.30	9.3	0.03	0.07	0.3
2 m	DED	woofer	0.98	1.62	7.7	0.03	0.06	0.3
2 m	DED	midrange	1.19	2.09	9.2	0.14	0.26	1.2
2 m	DED	tweeter	1.71	3.57	12.0	0.41	0.74	5.4
2 m	DED	3-way sum	1.24	2.07	9.1	0.23	0.25	5.3
2 m	direct only	woofer	1.36	3.16	4.0	0.02	0.04	0.1
2 m	direct only	midrange	1.36	2.96	4.5	0.07	0.12	0.6
2 m	direct only	tweeter	1.34	2.88	4.5	0.04	0.07	0.4
2 m	direct only	3-way sum	1.33	3.16	4.3	0.03	0.05	0.4

Figure 12 shows where: in the front half ($|\theta| \leq 90°$) no angle exceeds 0.3 dB RMS (0.2 dB for the summed loudspeaker); the residual is behind the cabinet ($|\theta| \geq 120°$), at mid and high frequencies, where the edge waves dominate the response — up to 1.3 dB RMS at one angle for the tweeter at 1 m, 3 dB at 2 m. The woofer, whose band is low, is hardly affected.

Two mechanisms are at work. First, the edges are not at the driver: the correction moves the edge waves by the driver's change of distance, not by their own, so their timing relative to the direct sound keeps the error of the measured position — visible in the late part of the impulse responses (Figure 13). This error shrinks with distance. Second, behind the cabinet the response is an interference pattern of many edge waves, with lobes about 10° wide at 5 kHz (λ/W) and narrower above; the correction interpolates between measured directions 10° apart, which cannot follow it. This one does not shrink with distance: at 2 m the summed loudspeaker keeps 0.23 dB RMS and its worst local deviation even grows to 5.3 dB, in a narrow region near −170° around 5–6 kHz.

6.4 Angular resolution

Halving the step to 5° addresses the second mechanism. At 2 m it brings the summed loudspeaker from 0.23 to 0.09 dB RMS and its worst deviation from 5.3 to 1.3 dB; the tweeter goes from 0.41 to 0.16 dB RMS. At 1 m the gain is smaller (0.24 to 0.19 dB RMS), because there the first mechanism, which no angular step can fix, takes a larger share.

6.5 Spatial averages and Predicted In-Room Response

The CTA-2034-A curves average many directions and the residual errors, concentrated behind the cabinet and changing sign from one frequency to the next, largely cancel (Figure 14, Table 5). Uncorrected, the centered setup lowers the sound power by up to 1.4 dB at 1 m (every off-axis microphone position is farther away), the PIR by up to 1.02 dB and shifts the directivity index by 1.2 dB; at 2 m these errors halve. Corrected, the PIR stays within 0.14 dB (1 m) and 0.07 dB (2 m) of the rigorous one, the sound power within 0.13 dB and the directivity index within 0.11 dB.

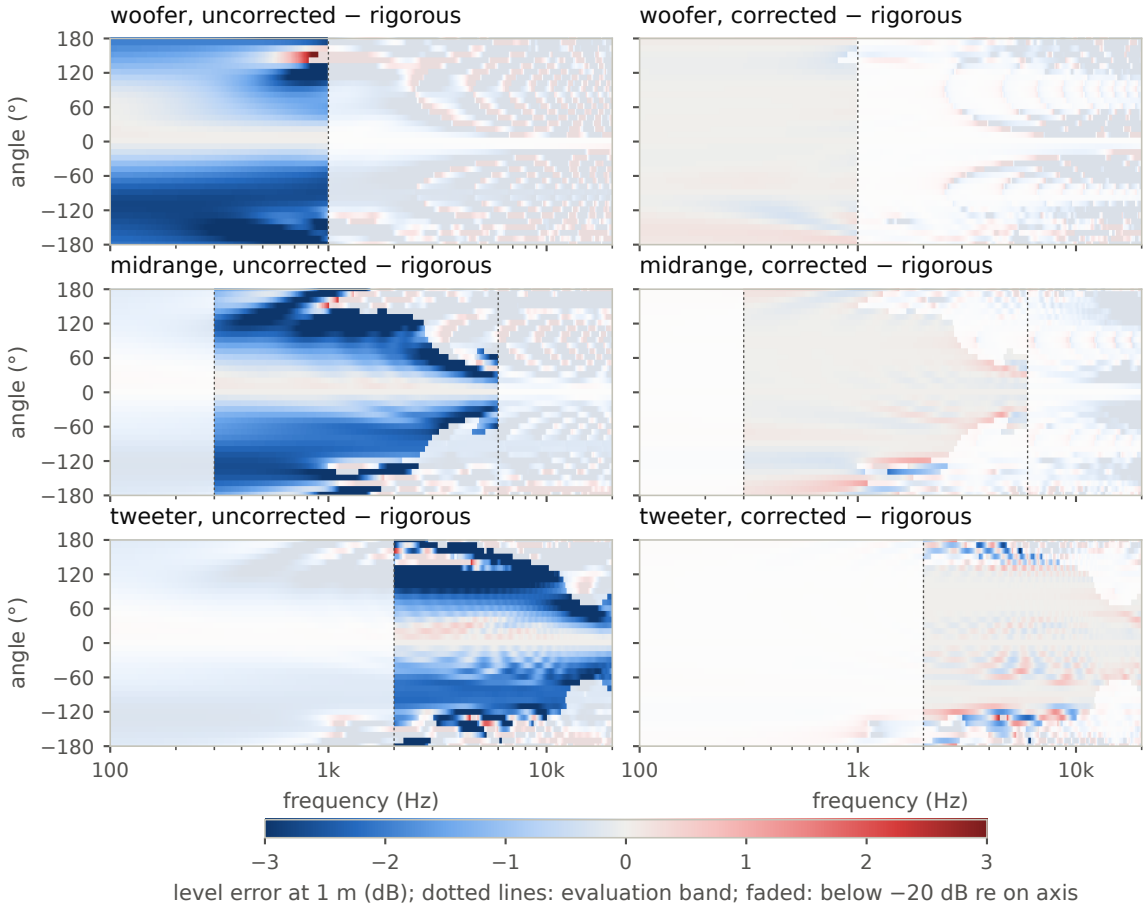


Figure 10: Level error of each driver at 1 m, uncorrected (left) and corrected (right). Dotted lines: evaluation band. Faded: more than 20 dB below the on-axis response.

Table 5: Largest deviation from the rigorous case, 100 Hz–20 kHz, of the horizontal-orbit CTA-2034-A curves of the summed loudspeaker (dB).

d	model	data	LW	ER	SP	PIR	DI
1 m	DED	uncorrected	0.51	0.95	1.39	1.02	1.19
1 m	DED	corrected	0.18	0.13	0.13	0.14	0.11
1 m	direct only	uncorrected	0.51	0.87	1.33	0.86	1.11
1 m	direct only	corrected	0.05	0.05	0.02	0.05	0.04
2 m	DED	uncorrected	0.26	0.44	0.66	0.48	0.58
2 m	DED	corrected	0.09	0.07	0.07	0.07	0.06
2 m	direct only	uncorrected	0.26	0.40	0.63	0.40	0.53
2 m	direct only	corrected	0.03	0.02	0.01	0.02	0.03

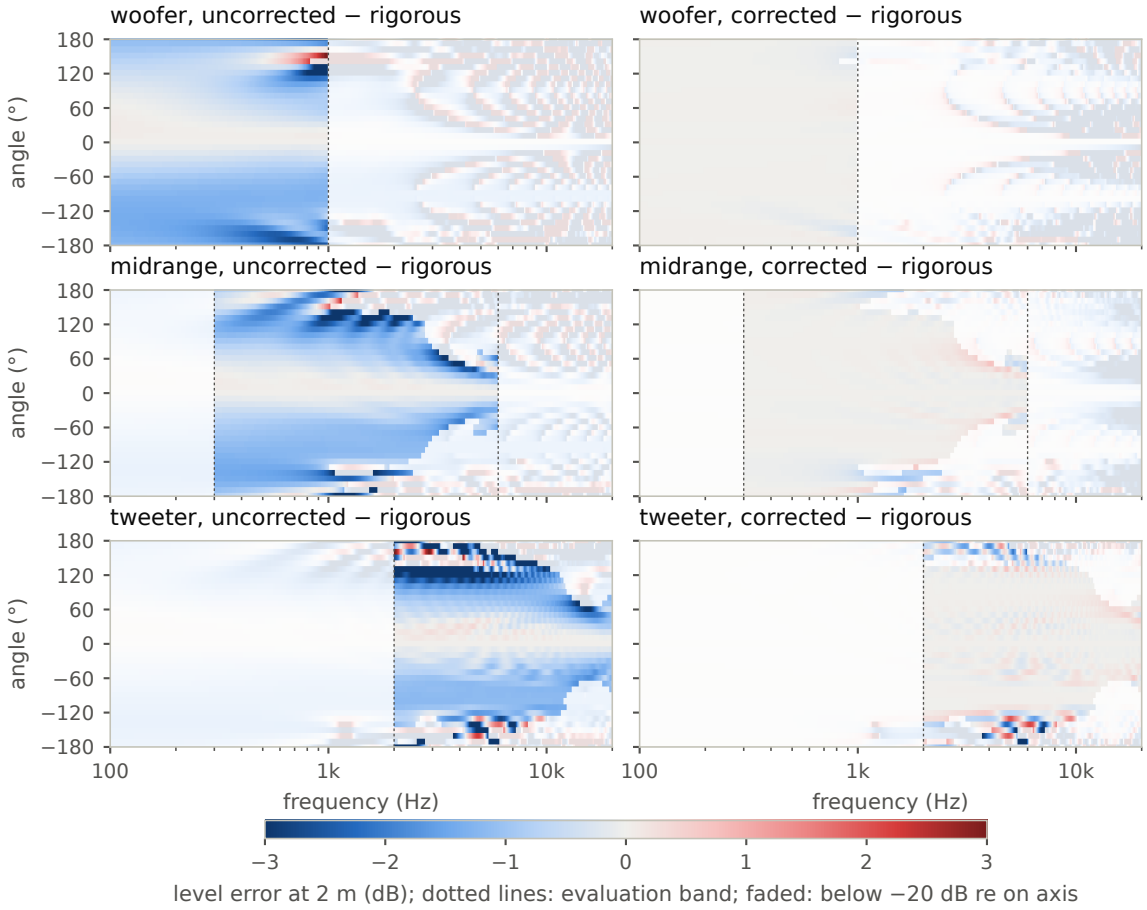


Figure 11: Same as Figure 10 at 2 m.

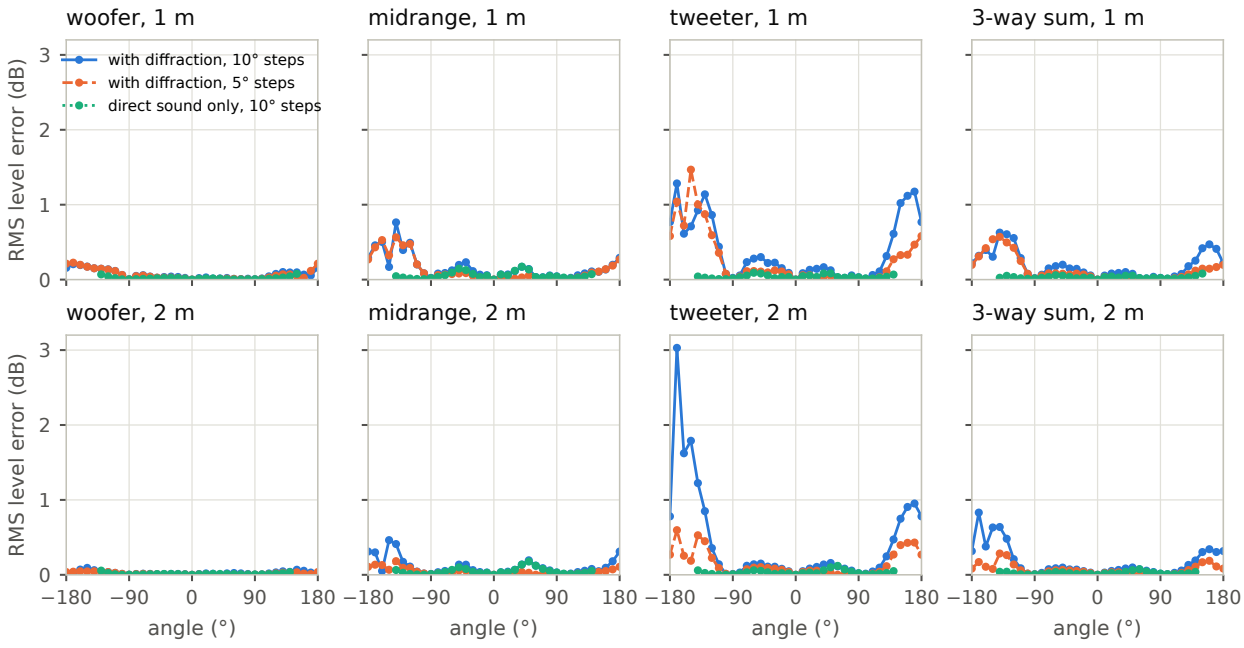


Figure 12: RMS level error of the corrected data at each angle (over the relevant frequencies), with the DED diffraction and 10° or 5° steps, and for the direct sound alone.

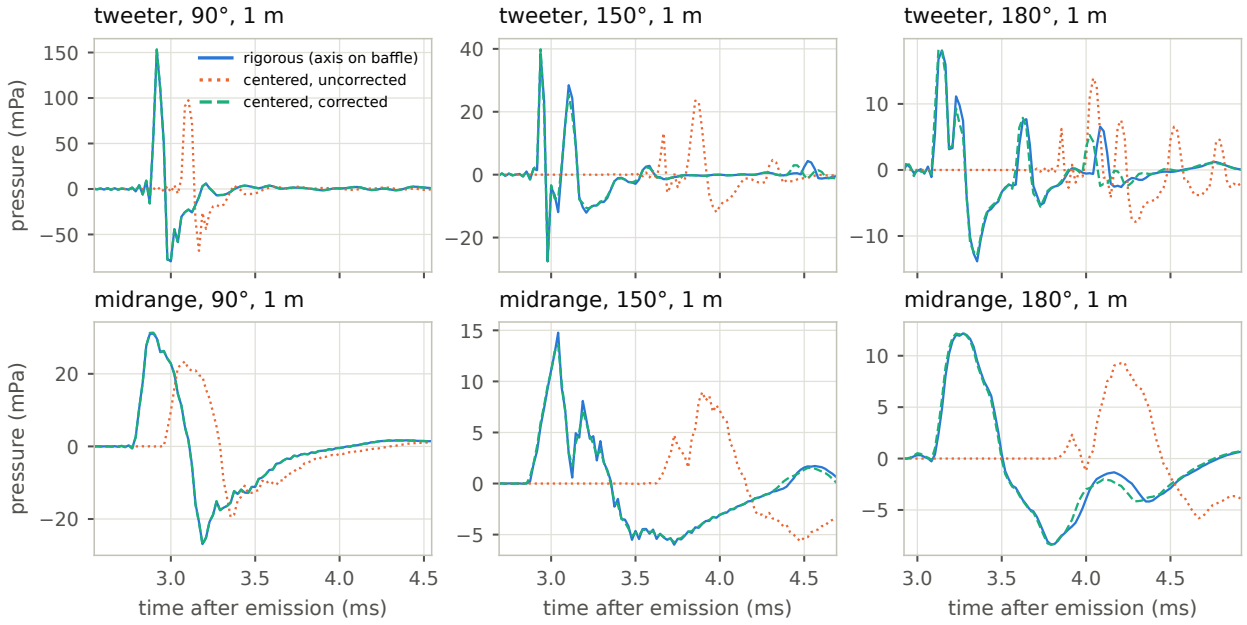


Figure 13: Impulse responses at 1 m (time from emission). The uncorrected responses arrive late and low; the corrected ones line up with the rigorous ones, except for the later edge-wave arrivals behind the cabinet.

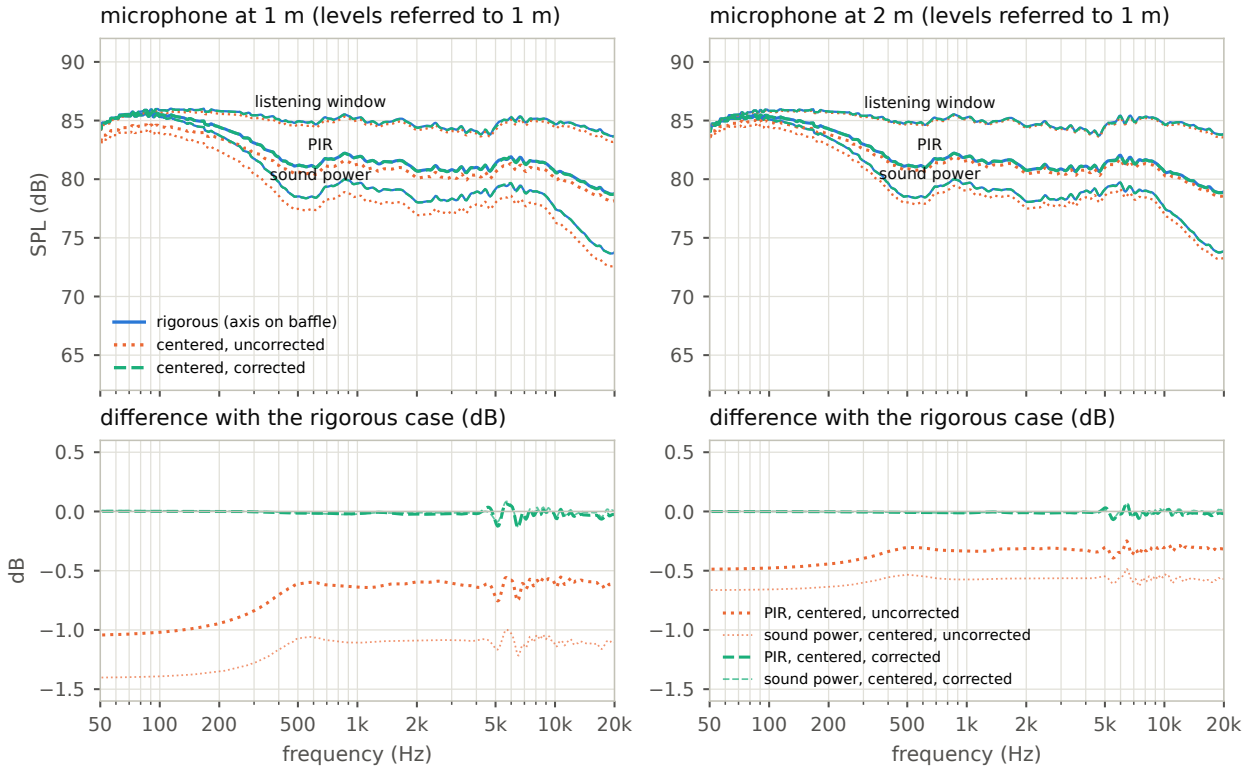


Figure 14: Top: listening window, PIR and sound power of the summed loudspeaker from the horizontal orbit (levels referred to 1 m). The corrected curves lie on the rigorous ones. Bottom: differences with the rigorous case.

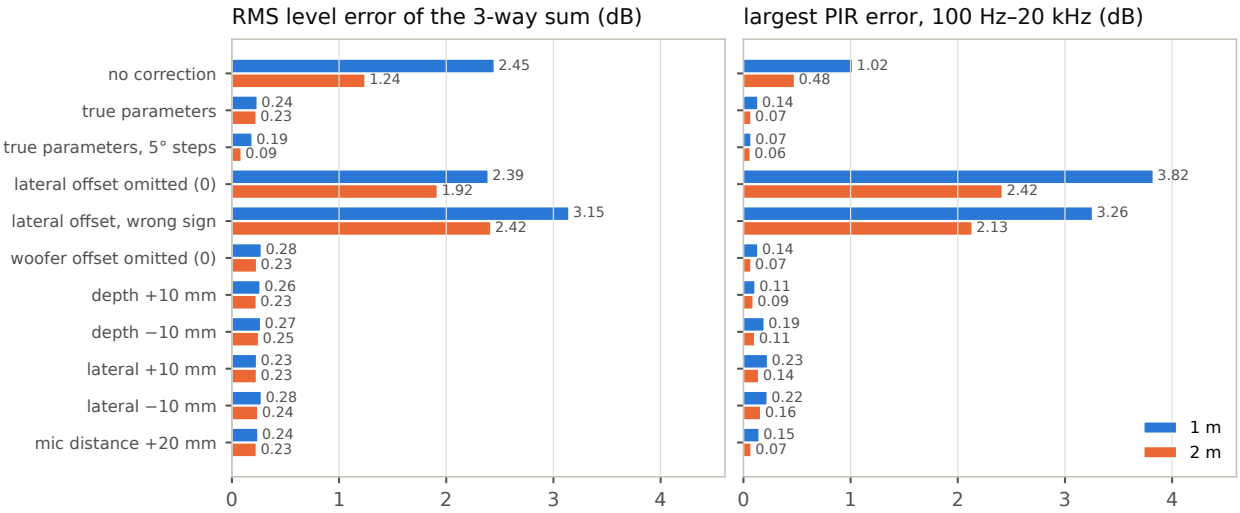


Figure 15: Effect of the correction parameters: RMS level error of the summed loudspeaker (left) and largest PIR deviation (right), at 1 m and 2 m.

Table 6: RMS level error per driver and for the summed loudspeaker, and largest PIR deviation, for the correction variants (dB).

	1 m					2 m				
	woofer	mid	tweeter	sum	PIR	woofer	mid	tweeter	sum	PIR
no correction	1.84	2.39	3.30	2.45	1.02	0.98	1.19	1.71	1.24	0.48
true parameters	0.09	0.21	0.40	0.24	0.14	0.03	0.14	0.41	0.23	0.07
true parameters, 5° steps	0.09	0.18	0.29	0.19	0.07	0.02	0.05	0.16	0.09	0.06
lateral offset omitted (0)	0.61	1.42	4.13	2.39	3.82	0.39	0.88	3.32	1.92	2.42
lateral offset, wrong sign	1.15	2.76	5.16	3.15	3.26	0.74	2.02	4.18	2.42	2.13
woofer offset omitted (0)	0.27	0.21	0.40	0.28	0.14	0.15	0.14	0.41	0.23	0.07
depth +10 mm	0.13	0.25	0.42	0.26	0.11	0.06	0.15	0.41	0.23	0.09
depth −10 mm	0.13	0.23	0.45	0.27	0.19	0.07	0.16	0.44	0.25	0.11
lateral +10 mm	0.12	0.18	0.40	0.23	0.23	0.05	0.14	0.42	0.23	0.14
lateral −10 mm	0.08	0.26	0.46	0.28	0.22	0.04	0.15	0.44	0.24	0.16
mic distance +20 mm	0.09	0.22	0.42	0.24	0.15	0.03	0.14	0.41	0.23	0.07

6.6 Wrong parameters and the laterally shifted microphone

The correction needs the geometry it is given (Figure 15, Table 6). Errors of ±10 mm on the depth or the lateral offset, or of 20 mm on the microphone distance, change the RMS errors by a few hundredths of a dB and the PIR by less than 0.1 dB: measuring with a tape is good enough.

The lateral offset itself is another matter. Because the microphone has been moved sideways to face the reference point, the model must know that the reference axis is $\ell = 120$ mm from the rotation axis, on the + side. Omitting it ($\ell = 0$, i.e. correcting only for the depth, as for a symmetric loudspeaker) leaves the summed loudspeaker 2.39 dB RMS off at 1 m and the PIR up to 3.82 dB off; entering it with the wrong sign is as bad (3.26 dB). For the PIR, and for the tweeter (4.13 and 5.16 dB RMS against 3.30 dB), both are worse than no correction at all (1.02 dB). The sign convention matters: ℓ is positive when the reference axis lies on the side the microphone faces at +90°. With the convention of this study (positive angles toward the tweeter side) the reference axis is on the + side; a turntable that counts angles the other way needs $\ell = -120$ mm and a woofer offset of +205 mm.

The woofer's own offset (−205 mm) matters less: omitting it raises the woofer's error from 0.09 to 0.27 dB RMS (1.7 dB at worst) at 1 m, and the summed loudspeaker hardly notices, the woofer being crossed over at 450 Hz where its directivity varies slowly.

7 A boundary-element check

Two parts of the model are approximations, and both matter most where the residual of the correction lives: the drivers radiate as points with a far-field directivity, and the DED model represents the cabinet by dipoles along the front edges only, which describes the field behind the cabinet least well. This section repeats the study on a variant of the loudspeaker computed with the boundary-element method (BEM), which solves the radiation of the whole cabinet — every face and edge, the drivers as extended rigid surfaces — with neither approximation, from 20 Hz to 16 kHz.

7.1 A two-way variant

The BEM model is a two-way in the same cabinet (Figure 16): the SIG225-4 woofer at $x = -85$ mm and the SICA tweeter at $x = +120$ mm, both at mid-height ($y = 0$). Dropping the midrange removes a source and, with both drivers on the cabinet's horizontal middle plane, makes the problem symmetric about the plane of the horizontal orbit, which halves it. The reference point is the tweeter center and the microphone is at its height: both drivers lie in the plane of rotation. The correction's parameters are those of the three-way: depth 145 mm, lateral offset +120 mm, woofer offset −205 mm, tweeter offset 0.

The radiators are rigid and move along their axis: the woofer is a recessed cone of radius $a = \sqrt{S_d/\pi} = 83.8$ mm, 35 mm deep at $r = 30$ mm and 40 mm at the center (the dust cap), the tweeter the dome of Section 2.3 (28 mm, 7.5 mm high), both rims flush with the baffle.

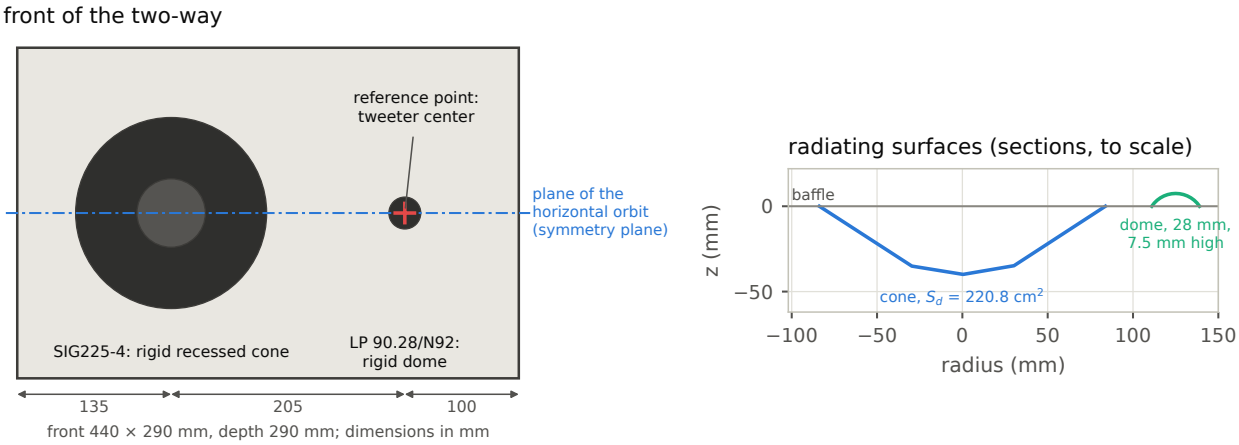


Figure 16: The two-way variant solved by the BEM: same cabinet, woofer and tweeter on its horizontal middle plane, which is the plane of the horizontal orbit and a plane of symmetry.

Drivers. For each driver moving with a volume velocity of $1\,\mathrm{m}^3/\mathrm{s}$, the BEM gives the complex pressure $Z_i(\mathbf{M}, f)$ at any point $\mathbf{M}$ (Pa per m^3/s). The volume velocity comes from the datasheet response of Section 2.2 (the woofer in its 24 L box):

$$p_i(\mathbf{M}, f) = U_i(f)\, Z_i(\mathbf{M}, f), \qquad U_i(f) = \frac{H_i(f)}{q_i(f)}, \qquad q_i(f) = \frac{\mathrm{j}\omega\rho_0}{2\pi r_{\mathrm{ref}}}\, A_i(0, k), \tag{30}$$

where q_i is the on-axis far-field pressure of the same radiator in an infinite baffle per unit volume velocity, according to the aperture model of Eq. (7) (with the cone's profile $z(r) < 0$ for the woofer). Were that model exact, p_i would be $H_i\, D_i(\theta, k)\, (r_{\mathrm{ref}}/r)\, e^{-\mathrm{j}kr}$ in an infinite baffle, the direct term of Eq. (9): the BEM and the DED model of this two-way share the same drivers and differ only by how they radiate and diffract. The DED model is evaluated with the cone's profile too.

Crossover. Fourth-order Linkwitz–Riley at 2 kHz, the woofer high-passed at 40 Hz, the filters designed as in Section 2.5 from the BEM's on-axis responses at 1 m: the target times the minimum-phase inverse of each driver's 1/6-octave smoothed magnitude. The same filters serve both models.

7.2 The boundary-element solution

The BEM data were computed with Huygens, a boundary-element solver under development whose code is not public; the pressures at every microphone position are in the repository (`data/bem/two_way.npz`), with the scripts that turn them into the results below. The method:

- exterior Neumann problem of the Helmholtz equation around the closed cabinet, rigid, each driver's surface moving along its axis, the other one at rest (one right-hand side per driver);
- Burton–Miller formulation [7] (the direct integral equation combined with its normal derivative, coupling $\alpha = -\mathrm{j}/k$ for the time factor $e^{+\mathrm{j}\omega t}$), so that no frequency falls on an interior resonance of the box; Galerkin discretization, pressure piecewise linear and normal derivative piecewise constant on flat triangles, hypersingular operator in Maue's weak form, singular integrals by the Sauter–Schwab transformations [5];
- uniform mesh of the whole surface, edges of $\lambda/6$ at the top of each band of frequencies (bands of a ratio 1.26 in edge length), 50 mm at most; the half model and its mirror image;
- assembly with the near and singular pairs of triangles in double precision on the processor and the distant pairs in single precision on the GPU; dense LU factorization in double precision.

The 464 frequencies run from 20 Hz to 16 kHz in 1/48-octave steps. At 16 kHz the surface has 162 898 triangles and the half model 40 937 unknowns (30.0 GB, 576 s per frequency). The microphone positions are those of the study: the horizontal orbits of both setups and the vertical orbit of the rigorous setup, at 1 m and 2 m, every 5° (432 points). The sweep took 3.6 h on a Mac mini (Apple M4 Pro, 64 GB), 62 % of it in the top band.

Two checks on the data. At 20 Hz, on the 2 m circle, each driver radiates the pressure of a monopole of the same volume velocity, $\omega\rho_0 U/(4\pi r)$, to within ±7 %, a variation explained below. Where the mesh changes (by 1.26 in edge length) the levels at the relevant points of the horizontal orbits move by 0.1 to 0.5 dB RMS, about as much as from one frequency to the next within a band: the mesh is fine enough for the comparisons that follow.

All the results of this section are computed at the BEM frequencies for both models, and the power spectra are smoothed to 1/24 octave as before (on this grid, the mean of three neighboring frequencies). The evaluation bands are 50 Hz–4 kHz for the woofer, 1–16 kHz for the tweeter and 50 Hz–16 kHz for the sum.

7.3 What the DED model misses

The low-frequency acoustic center lies ahead of the baffle. At 50 Hz the BEM level at 0° exceeds the level at 180° by 2.3 dB at 1 m and 1.2 dB at 2 m: a monopole about 130 mm in front of the baffle, at both distances — the low-frequency acoustic center described by Vanderkooy [6]. The DED model puts it about 40 to 60 mm ahead. It is the variation of the 20 Hz check above.

Baffle step. On the reference axis the BEM woofer rises 4.5 dB above its half-space level around 1 kHz, the DED model 2 dB (Figure 17).

The dome radiates wider. The rigid dome of the BEM is much wider than the aperture model of Eq. (7): on the tweeter side of the orbit its response falls by 6 dB at 95° at 6.35 kHz (DED: 75°), at 80° at 10 kHz (55°) and at 50° at 16 kHz (35°), and its on-axis level is 2 to 3 dB lower above 6 kHz for the same volume velocity (Figures 17 and 19). The aperture model lets each ring of the cap radiate as if it lay in a plane baffle; the protruding cap radiates sideways. With the

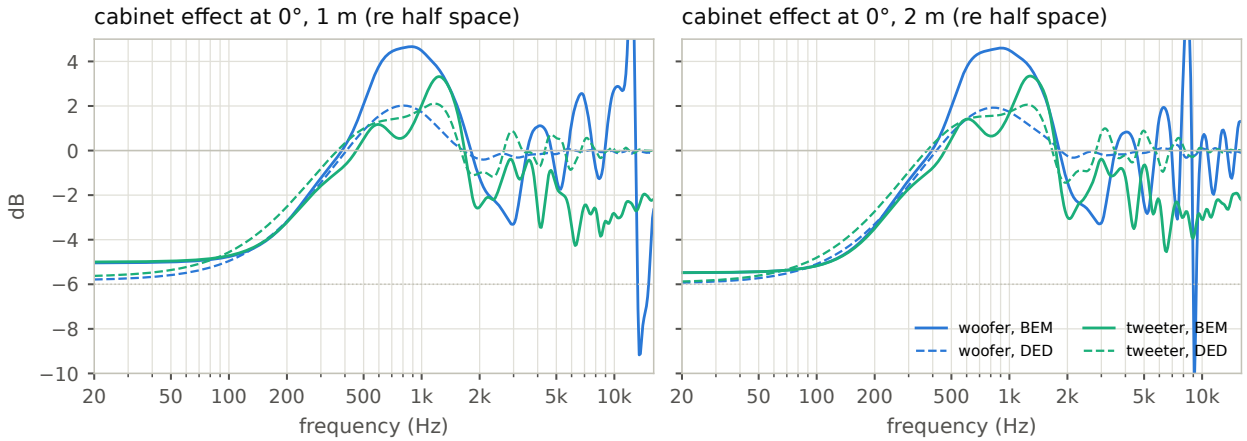


Figure 17: Each driver at 0° (the tweeter's axis), BEM and DED, referred to the same driver in an infinite baffle according to the aperture model: the cabinet effect, plus for the BEM the difference between the rigid dome and its aperture model above a few kHz. At low frequency the BEM's acoustic center, 130 mm ahead of the baffle, raises the level at 0°.

Table 7: DED against BEM, rigorous setup, levels referred to 0°: RMS and 95th percentile of the difference over the relevant points, in front of the baffle ($|\theta| \leq 90°$) and behind it (dB).

		front		behind	
d		RMS	P95	RMS	P95
1 m	woofer	2.45	4.99	3.01	6.18
1 m	tweeter	3.36	6.31	5.29	11.85
1 m	2-way sum	2.55	5.23	4.07	9.58
2 m	woofer	2.48	5.26	3.24	6.71
2 m	tweeter	3.33	6.12	5.61	12.12
2 m	2-way sum	2.49	5.17	4.25	9.95

drivers' volume velocities taken from that model, the BEM tweeter therefore sits 2 to 3 dB below its datasheet on axis above 6 kHz; the crossover's equalization absorbs it.

Stronger diffraction. More sound reaches the edges, and the BEM's polar patterns carry interference ripples that the DED model hardly shows. On the woofer side of the front quadrant (−70° to −20°) the ripple has a period of about 25° at 3 kHz and 10° at 6.35 kHz, with ±1 to 3 dB: a secondary source some 330 mm from the tweeter, the far edge of the baffle (Figure 19). Behind the cabinet the patterns are finer still. Directivity aside (levels referred to 0°, Figure 18, Table 7), the two models differ by 3.36 dB RMS in front of the tweeter and 5.29 dB behind it at 1 m.

7.4 The correction on the BEM data

Table 8 and Figures 20 and 21 give the residuals; Table 9 the spatial averages.

The woofer is corrected as well as in the DED model of this two-way: 0.25 dB RMS at 1 m, 0.14 dB at 2 m. The low-frequency acoustic center ahead of the baffle does not get in the way: the spatial averages of the corrected data stay within 0.03 dB of the rigorous ones up to 1 kHz.

The tweeter and the summed loudspeaker keep more than in the DED model: 1.81 and 1.21 dB RMS at 1 m (DED: 0.56 and 0.36 dB), 1.59 and 1.05 dB at 2 m. The residual sits where the BEM's patterns are finest: on the woofer's side, in front and behind, and directly behind the cabinet (Figure 21). Three mechanisms add up:

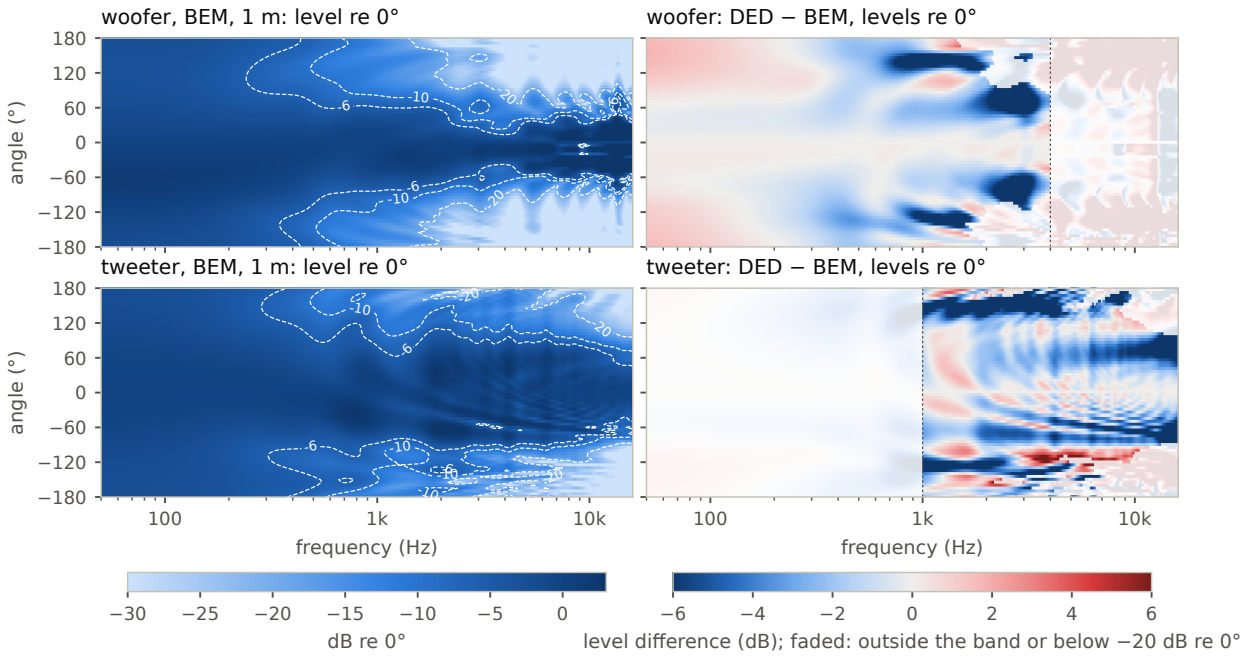


Figure 18: Left: BEM polar maps of the two drivers at 1 m (5° steps), levels re 0°. Right: the DED model's directivity minus the BEM's.

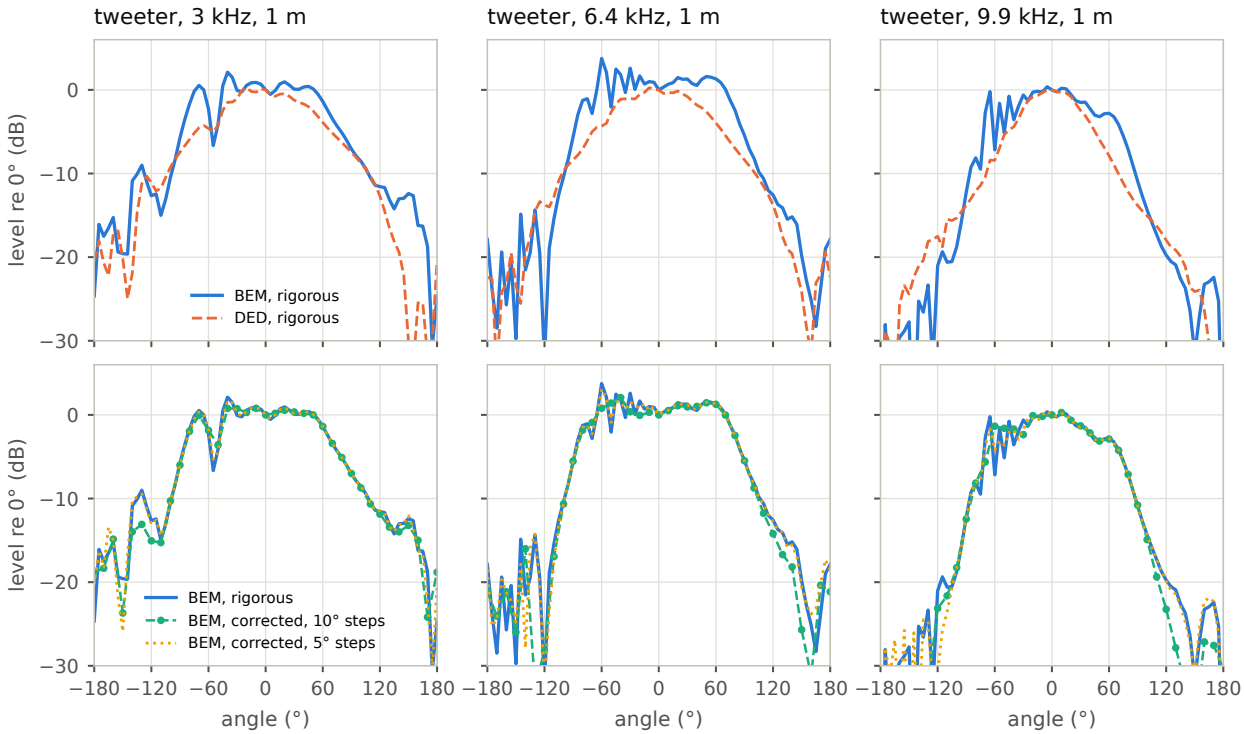


Figure 19: Tweeter at 1 m, level re 0° against angle at 3, 6.35 and 10 kHz. Top: BEM and DED. Bottom: what the correction rebuilds from the centered measurements of the BEM, with 10° and 5° steps. Negative angles are on the woofer's side.

Table 8: Level error of the two-way, BEM and DED, horizontal orbit: uncorrected, corrected (10° steps), corrected with interpolated levels (10°), corrected with 5° steps (dB, over the relevant points).

			uncorrected			corrected			levels		5° steps	
d	model		RMS	P95	max	RMS	P95	max	RMS	max	RMS	max
1 m	BEM	woofer	2.02	3.20	19.9	0.25	0.46	3.2	0.26	2.3	0.21	1.9
1 m	BEM	tweeter	3.24	6.20	25.5	1.81	3.25	22.7	0.96	6.0	0.70	7.3
1 m	BEM	2-way sum	2.56	4.61	26.0	1.21	1.92	22.7	0.62	6.2	0.47	7.3
1 m	DED	woofer	2.17	3.63	13.0	0.11	0.22	0.9	0.15	1.1	0.10	0.7
1 m	DED	tweeter	3.38	6.91	26.9	0.56	1.22	4.9	0.57	5.4	0.45	5.6
1 m	DED	2-way sum	2.66	4.67	26.7	0.36	0.56	4.9	0.35	5.5	0.28	5.6
2 m	BEM	woofer	1.05	1.81	6.9	0.14	0.23	2.1	0.15	1.9	0.06	0.9
2 m	BEM	tweeter	2.51	4.03	34.8	1.59	2.84	22.1	0.99	12.6	0.62	8.6
2 m	BEM	2-way sum	1.79	2.58	34.9	1.05	1.42	21.7	0.60	12.6	0.41	8.5
2 m	DED	woofer	1.09	1.94	9.4	0.07	0.13	0.5	0.11	1.1	0.03	0.2
2 m	DED	tweeter	2.01	4.08	25.3	0.62	1.00	8.9	0.56	8.4	0.20	1.9
2 m	DED	2-way sum	1.45	2.49	25.6	0.41	0.34	9.0	0.35	8.4	0.12	1.9

- *Angular sampling.* 5° steps bring the tweeter to 0.70 dB RMS at 1 m and 0.62 dB at 2 m, the sum to 0.47 and 0.41 dB.
- *Interpolating complex responses.* Where the two measurements that bracket a direction are no longer coherent — the rear patterns at 10° steps — their complex mean cancels in part, down to −20 dB notches (Figure 19, −130° around 6 kHz). Interpolating the re-propagated powers instead, $|\hat{H}|^2 = \sum_k u_k \, |g_k H_k|^2$ with the phase of the complex interpolation, avoids it: 0.96 dB RMS for the tweeter at 1 m with 10° steps, 0.63 dB with 5° (Table 8). In the DED model it makes no difference.
- *Secondary sources.* The far edge, 330 mm from the tweeter, re-radiates the sound that grazes the baffle; the correction moves that wave as if it came from the tweeter, so the ripple it makes in front lands at the wrong angle. This part remains with 5° steps: at 6.35 kHz the corrected response at −30° is 2.2 dB low with 10° steps, 1.1 dB with 5° (Figure 19). It shrinks with distance.

Spatial averages. Up to 3 kHz the corrected CTA-2034-A curves remain within about 0.1 dB of the rigorous ones, as in the DED model. Between 4 and 13 kHz the residual concentrates in narrow bands: the PIR deviates by up to 0.63 dB at 1 m and 0.36 dB at 2 m, the listening window by 0.84 and 0.46 dB (Figure 22, Table 9); uncorrected, the PIR is 1.24 and 0.65 dB off. With 5° steps the PIR comes within 0.36 dB (1 m), with 5° steps and interpolated levels within 0.29 dB. With both orbits, as the standard measures them, the vertical orbit dilutes the horizontal residual: the PIR is within 0.36 dB at 1 m and 0.20 dB at 2 m when only the horizontal orbit needs correcting (Table 10; the BEM was solved on the rigorous vertical orbit only). In the DED model, the vertical orbit measured with the loudspeaker on its side and corrected (depth 145 mm, no lateral offset) gives a PIR within 0.07 dB, from 0.85 dB uncorrected.

Parameters. The conclusions of Section 6.6 stand (Table 11): an error of ±10 mm on the depth or on the lateral offset, or of 20 mm on the distance, changes the PIR by less than 0.1 dB; omitting the lateral offset, or giving it the wrong sign, puts the PIR 3.73 or 3.11 dB off at 1 m, worse than no correction (1.24 dB). Crossed over at 2 kHz instead of 450 Hz, the woofer needs its own offset more than in the three-way: without it, 1.12 dB RMS instead of 0.25.

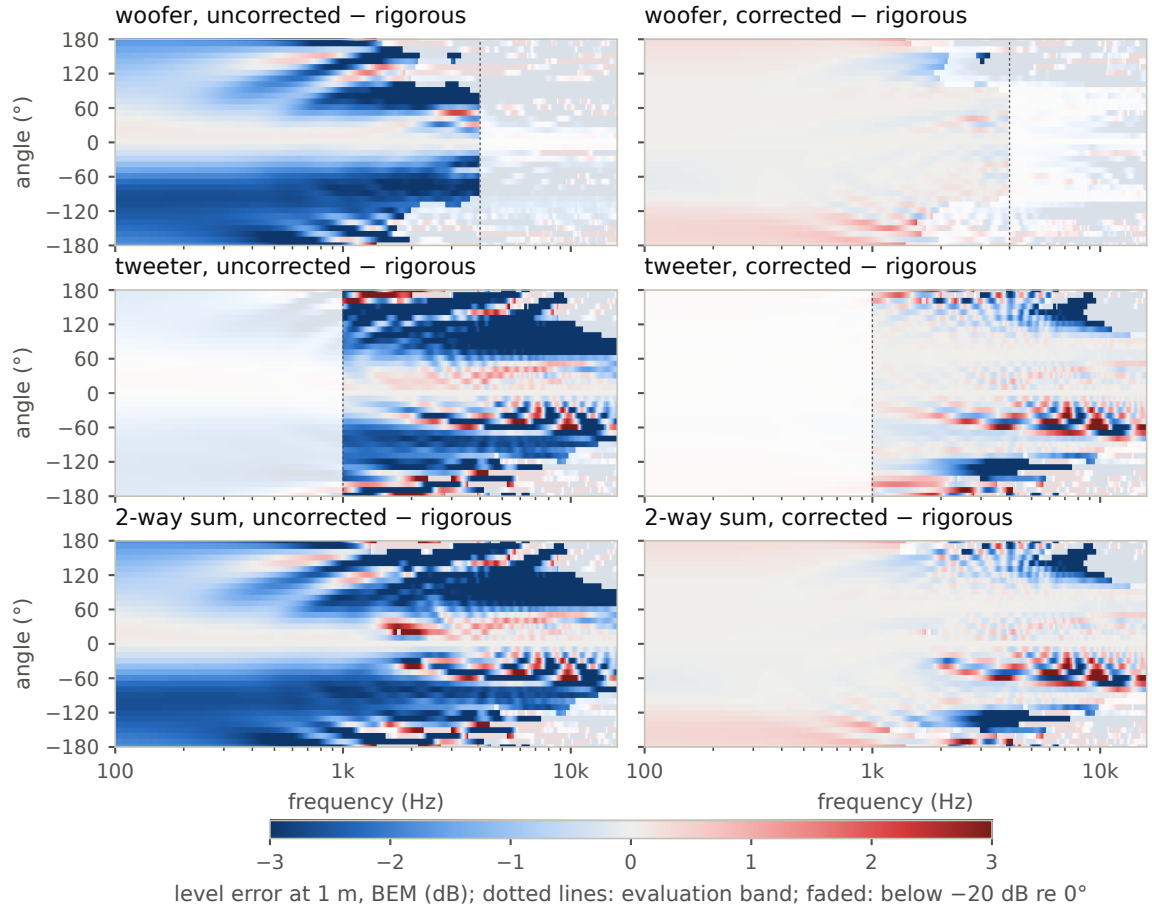


Figure 20: Level error of the BEM data at 1 m, uncorrected (left) and corrected (right), 10° steps.

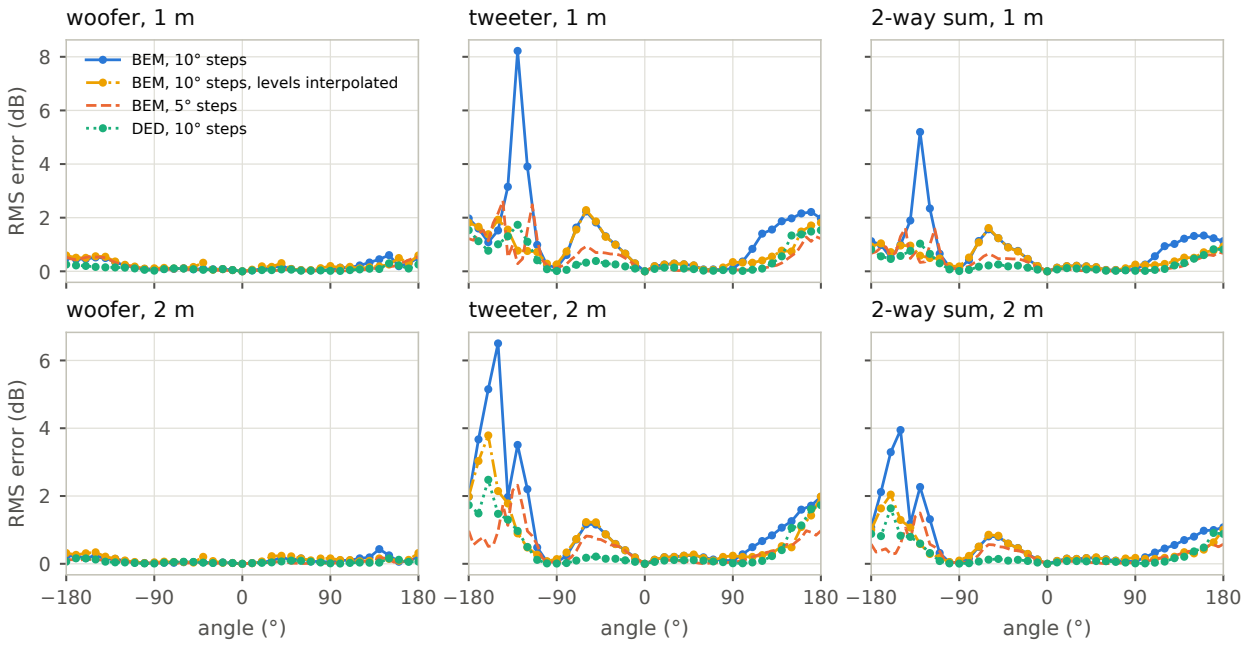


Figure 21: RMS level error of the corrected data at each angle: BEM with 10° steps, with interpolated levels, with 5° steps, and the DED model of the same two-way. Negative angles are on the woofer's side.

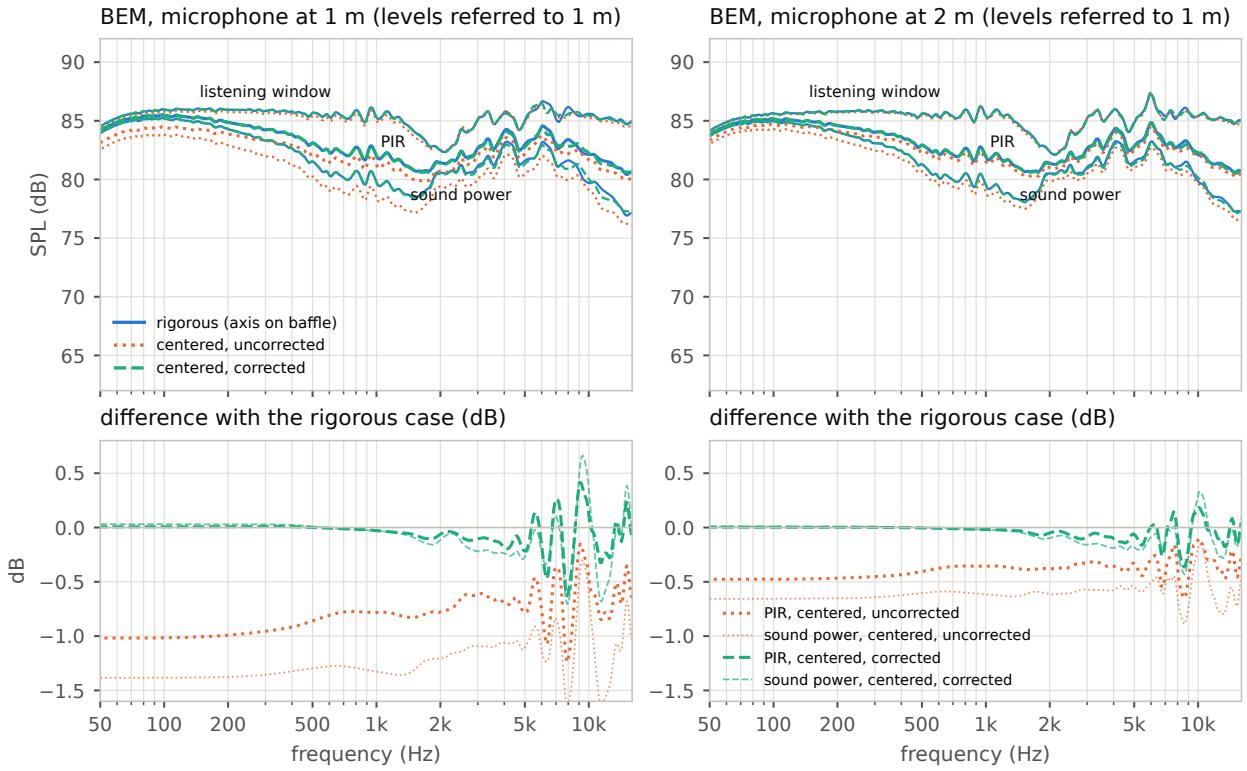


Figure 22: Listening window, PIR and sound power of the BEM two-way from the horizontal orbit, and their differences with the rigorous case.

Table 9: Largest deviation from the rigorous case, 100 Hz–16 kHz, of the horizontal-orbit CTA-2034-A curves of the two-way (dB).

d	model	data	LW	ER	SP	PIR	DI
1 m	BEM	uncorrected	0.87	1.23	1.65	1.24	1.48
1 m	BEM	corrected	0.84	0.60	0.70	0.63	0.71
1 m	DED	uncorrected	0.57	0.95	1.40	1.02	1.20
1 m	DED	corrected	0.17	0.10	0.09	0.11	0.13
2 m	BEM	uncorrected	0.46	0.65	0.89	0.65	0.72
2 m	BEM	corrected	0.46	0.35	0.43	0.36	0.34
2 m	DED	uncorrected	0.29	0.44	0.66	0.48	0.60
2 m	DED	corrected	0.11	0.07	0.06	0.08	0.10

Table 10: The same with both orbits, as CTA-2034-A measures them (dB). BEM: the vertical orbit is the rigorous one. DED: the vertical orbit is also measured with the cabinet centered, on its side, and corrected.

d	model	horizontal	vertical	LW	ER	SP	PIR	SPDI	ERDI
1 m	BEM	uncorrected	rigorous	0.65	0.62	0.78	0.66	0.74	0.53
1 m	BEM	corrected	rigorous	0.63	0.31	0.35	0.36	0.46	0.42
1 m	DED	uncorrected	uncorrected	0.42	0.87	1.25	0.85	1.10	0.71
1 m	DED	corrected	corrected	0.13	0.06	0.05	0.07	0.10	0.08
2 m	BEM	uncorrected	rigorous	0.34	0.33	0.43	0.34	0.43	0.31
2 m	BEM	corrected	rigorous	0.34	0.18	0.21	0.20	0.28	0.23
2 m	DED	uncorrected	uncorrected	0.20	0.45	0.63	0.42	0.58	0.39
2 m	DED	corrected	corrected	0.09	0.04	0.04	0.05	0.07	0.05

Table 11: RMS level error and largest PIR deviation of the BEM two-way for the correction variants (dB).

	1 m				2 m			
	woofer	tweeter	sum	PIR	woofer	tweeter	sum	PIR
no correction	2.02	3.24	2.56	1.24	1.05	2.51	1.79	0.65
true parameters	0.25	1.81	1.21	0.63	0.14	1.59	1.05	0.36
true parameters, 5° steps	0.21	0.70	0.47	0.36	0.06	0.62	0.41	0.34
levels interpolated	0.26	0.96	0.62	0.55	0.15	0.99	0.60	0.32
levels interpolated, 5° steps	0.22	0.63	0.41	0.29	0.07	0.43	0.28	0.28
lateral offset omitted (0)	0.82	4.28	2.90	3.73	0.65	3.47	2.33	2.76
lateral offset, wrong sign	1.68	4.48	3.10	3.11	1.28	3.76	2.58	2.19
woofer offset omitted (0)	1.12	1.81	1.24	0.69	0.70	1.59	1.08	0.38
depth +10 mm	0.29	1.61	1.08	0.59	0.14	1.56	1.03	0.36
depth −10 mm	0.25	2.08	1.39	0.70	0.16	1.65	1.10	0.41
lateral +10 mm	0.26	1.98	1.33	0.65	0.13	1.60	1.06	0.38
lateral −10 mm	0.26	1.64	1.09	0.66	0.16	1.64	1.09	0.39
mic distance +20 mm	0.24	1.80	1.20	0.64	0.14	1.59	1.06	0.37

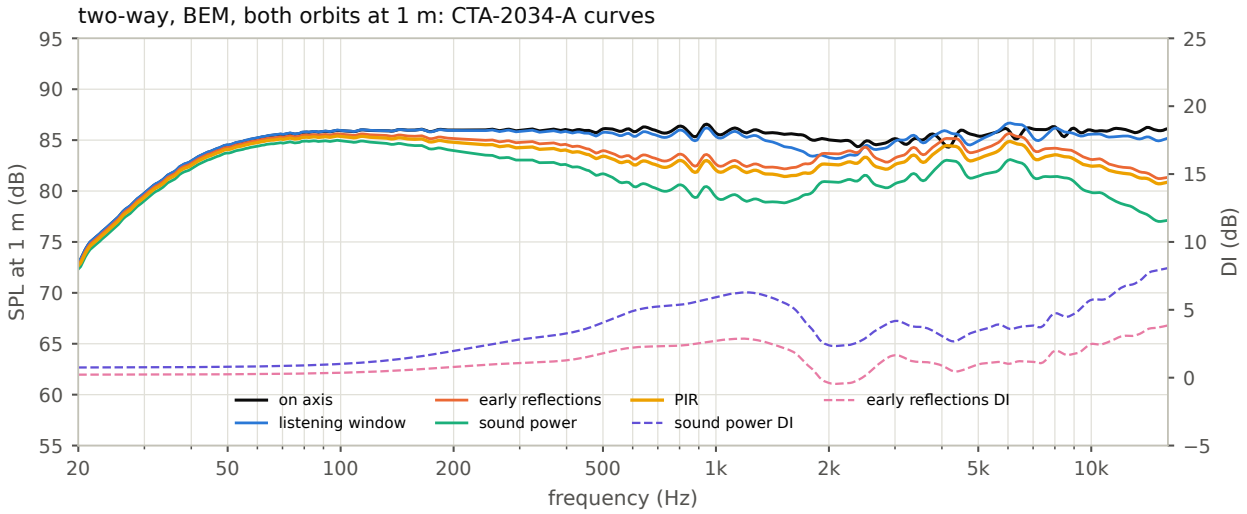


Figure 23: CTA-2034-A curves of the BEM two-way, rigorous setup, both orbits at 1 m.

The two-way's spinorama. For reference, Figure 23 shows the CTA-2034-A curves of the BEM two-way from both orbits at 1 m.

7.5 What changes

The BEM confirms what the correction does below about 3 kHz, where the woofer and the crossover region are: the spatial averages of the corrected data match the rigorous ones within 0.1 dB and the lateral offset is critical. Above, the rigid dome sends more sound to the cabinet's edges than the DED model assumes, the polar patterns carry finer interference ripples, and the correction leaves more: about 1–2 dB RMS on the tweeter's individual curves with 10° steps, and up to about 0.6 dB on the PIR in narrow bands at 1 m (0.4 dB at 2 m). Finer steps and level interpolation recover most of it; the part due to the far edge remains, smaller at 2 m.

8 Discussion

The geometry is the easy part. For the direct sound of each driver the correction is exact up to interpolation, and the angular interpolation of a 10° orbit is good enough (below 0.1 dB RMS). The out-of-plane offsets between the drivers and the microphone, which the planar model ignores,

do not matter at 1 m.

Diffraction is the limit, mostly behind the cabinet. The edge waves come from the baffle edges, not from the driver; the correction re-times them as if they did. In this simulation the consequence is small in front of the loudspeaker and grows behind it, at mid and high frequencies, where the edge waves are the response. Spatial averages are barely affected: the PIR of the corrected data is within about 0.1 dB of the rigorous one. Individual rear curves can show local deviations of a few dB in narrow bands. The boundary-element check (Section 7) shows that the DED model underestimates that diffraction for a dome tweeter: the rigid dome radiates wider, more sound reaches the edges, and the residual grows above 3 kHz, in front on the side of the far edge as well as behind — up to about 0.6 dB on the PIR in narrow bands at 1 m. Below 3 kHz the BEM confirms the DED results.

1 m or 2 m. At 2 m the raw errors are halved and the finite-distance part of the diffraction error shrinks, but the angular-interpolation part does not; a finer orbit (5°) is then the effective remedy. In a real room the choice is also about the reflection-free time window, which shrinks with distance — outside the scope of this free-field study.

Interpolate levels. Where the angular step undersamples the pattern, the two measurements that bracket a direction are not coherent and the linear interpolation of complex responses cancels in part, with artificial notches. Interpolating the re-propagated powers, keeping the phase of the complex interpolation, removes them; on the BEM data it halves the residual of the tweeter with 10° steps and costs nothing where the data are well sampled.

The lateral offset is the trap. The model handles the laterally shifted microphone, provided the lateral offset is entered, with the right sign. A wrong or missing lateral offset is worse than no correction. A quick check: at +90° the microphone must face the side counted as positive, and the reference axis of a layout like this one lies on that side if the microphone moves toward the tweeter at positive angles.

Limits of the study.

- Free field. The room, the gating window and its interaction with the correction (the delays change by up to 1 ms behind the cabinet) are not simulated.
- The DED model is an approximation: only the edges of the front baffle are modelled, the field behind the cabinet is the sum of the edge dipoles, and the edges are sharp. The boundary-element check removes the first two approximations for a two-way variant and finds more diffraction above 3 kHz. Real cabinets with rounded edges diffract less, which should help the correction.
- Rigid pistons, cones and domes. Real diaphragms break up at high frequency and real tweeters sit in faceplates or waveguides, which change their directivity and how much sound reaches the edges. The acoustic centers are on the baffle plane: a real acoustic center behind or in front of the baffle acts like a depth error for that driver; ±10 mm of depth error costs little here, and the low-frequency acoustic center, 130 mm ahead of the baffle in the BEM, does not disturb the correction.
- The vertical orbit, measured with the loudspeaker on its side, was simulated for the two-way with the DED model (depth 145 mm, no lateral offset; Table 10), the BEM on the rigorous vertical orbit only. The three-way's CTA-2034-A curves are horizontal-orbit estimates.

Checklist for a small-turntable polar measurement

1. Center the cabinet on the turntable; put the microphone on the reference axis (in front of the reference point) at 0°, at the reference height.
2. Measure the depth (rotation axis to baffle) and the lateral offset (rotation axis to reference axis) to within about 1 cm; note on which side the microphone faces at +90° and give the lateral offset that sign.
3. Give every driver its offset from the reference axis in the plane of rotation — a woofer beside the tweeter in a horizontal cabinet is not at 0.
4. Use 5° steps if the responses above a few kHz matter, behind the cabinet and on the side of the far edge, and interpolate levels rather than complex responses.
5. Treat rear responses at mid and high frequencies as approximate (cabinet diffraction). Spatial averages (sound power, PIR, DI) are robust: within about 0.1 dB below 3 kHz, a few tenths of a dB in narrow bands above.

9 Conclusion

On a small turntable the cabinet is centered and the microphone moved sideways to face the reference point; uncorrected, the off-axis data are too low (up to 2.5 dB behind the cabinet at 1 m), late and seen from the wrong direction, and the PIR is about 1 dB low. A geometric correction — each driver a point source with directivity, re-propagated and interpolated — restores them: essentially exactly for the direct sound, and to within a few tenths of a dB RMS once the cabinet's edge diffraction is included, the residual being concentrated behind the cabinet at mid and high frequencies. The spatial averages of CTA-2034-A, PIR included, come within about 0.1 dB of the rigorous ones. A boundary-element solution of a two-way in the same cabinet confirms this below about 3 kHz; above, the dome tweeter drives the cabinet's edges harder than the edge model assumes, and the corrected PIR deviates by up to about 0.6 dB in narrow bands at 1 m (0.4 dB at 2 m), 0.3 dB with 5° steps and interpolated levels. The method is only as good as its parameters, and one of them is critical: the lateral offset of the reference axis, with its sign.

A Additional figures

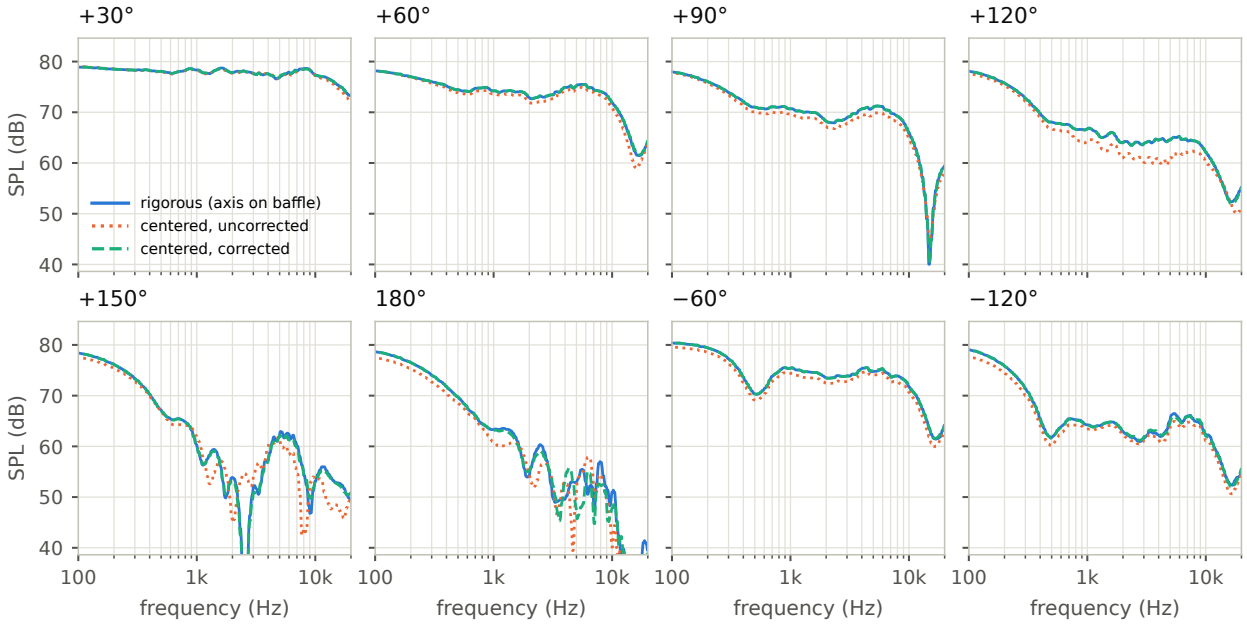


Figure 24: Summed loudspeaker at selected angles, 2 m (levels at 2 m), 1/12-octave smoothing.

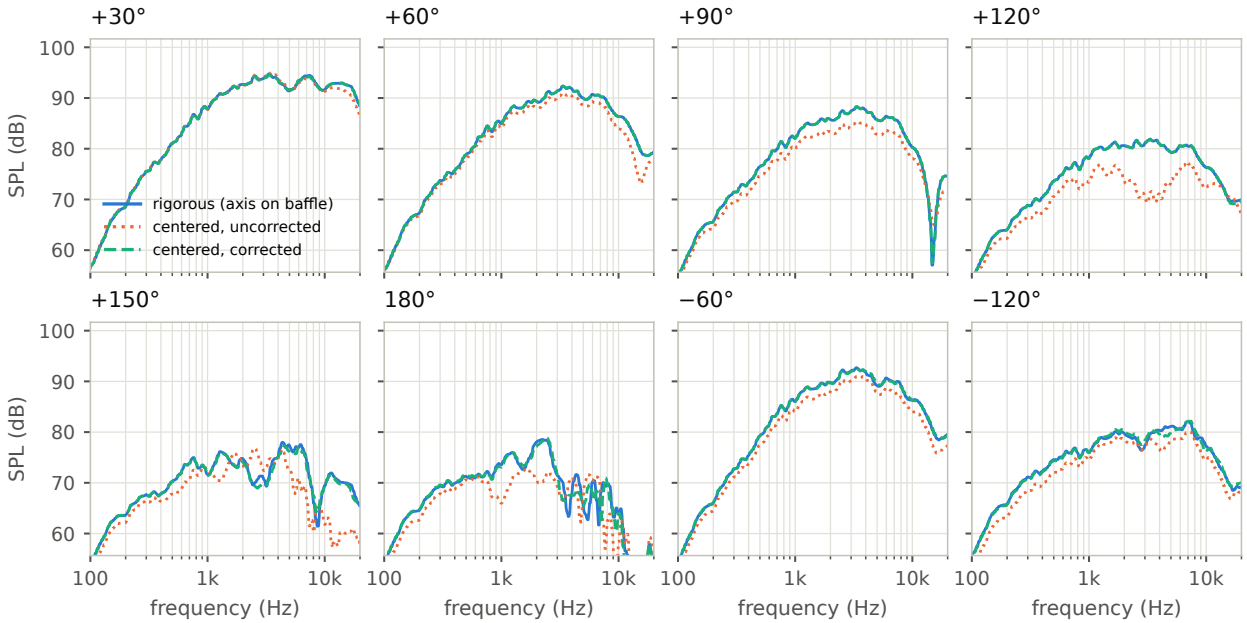


Figure 25: Tweeter alone at selected angles, 1 m, 1/12-octave smoothing. Behind the cabinet the response is made of edge waves; the corrected curves follow the rigorous ones with local deviations in the 4–8 kHz ripple.

B Reproducibility

Everything in this report is produced by the Python code of the repository (NumPy, SciPy, Matplotlib), from the boundary-element pressures for Section 7:

- `rotcenter/`: geometry and kinematics, radiators, driver models, DED diffraction, the correction (time and frequency domains), CTA-2034-A averages (one or both orbits), crossovers, metrics, the two-way variant;
- `scripts/run_study.py`: all simulated measurements of the three-way (≈ 5 min);
- `data/bem/`: the BEM pressures of the two-way (`two_way.npz`: each driver, per unit volume velocity, at the 432 microphone positions of `points.json` and the 464 frequencies, with the mesh size and the time of each solve), and `scripts/import_bem.py`, which wrote it from the solver's report;
- `scripts/run_bem.py`: the two-way, BEM and DED, all cases (≈ 30 s);
- `scripts/make_figures.py` and `scripts/make_bem_figures.py`: figures and tables;
- `scripts/make_schematics.py`: the schematics;
- `tests/`: unit tests (kinematics, directivities, DED normalization, correction of an ideal point source, time and frequency domains, crossovers, CTA-2034-A curves, the two-way's microphone positions against the BEM data).

The boundary-element solver itself (Huygens) is not public.

The datasheet curves (`data/datasheets/`) were extracted from the vector graphics of the manufacturers' PDF datasheets; they belong to their manufacturers and are used here for analysis only.

References

[1] M. Urban, C. Heil, C. Pignon, C. Combet, P. Bauman, "The Distributed Edge Dipole (DED) Model for Cabinet Diffraction Effects," *J. Audio Eng. Soc.*, vol. 52, no. 10, pp. 1043–1059, 2004.

[2] ANSI/CTA-2034-A, *Standard Method of Measurement for In-Home Loudspeakers*, Consumer Technology Association, 2015.

[3] J. Vanderkooy, "A Simple Theory of Cabinet Edge Diffraction," *J. Audio Eng. Soc.*, vol. 39, no. 12, pp. 923–933, 1991.

[4] L. L. Beranek, T. J. Mellow, *Acoustics: Sound Fields and Transducers*, Academic Press, 2012.

[5] S. A. Sauter, C. Schwab, *Boundary Element Methods*, Springer, 2011.

[6] J. Vanderkooy, "The Low-Frequency Acoustic Center: Measurement, Theory, and Application," 128th Convention of the Audio Engineering Society, London, 2010.

[7] A. J. Burton, G. F. Miller, "The application of integral equation methods to the numerical solution of some exterior boundary-value problems," *Proc. R. Soc. Lond. A*, vol. 323, pp. 201–210, 1971.