
Tally32 Basic


Noncommercial licence · 10/2026

The status display for your desk. On a call, busy until, free from.


A small display next to your monitor shows colleagues and visitors at a glance whether you are on a call, in a meeting or free, and **when you will be free again**. The data comes from your own computer over USB: microphone, Outlook calendar and Teams status. No server, no company network, no cloud beyond the Microsoft 365 you already have.

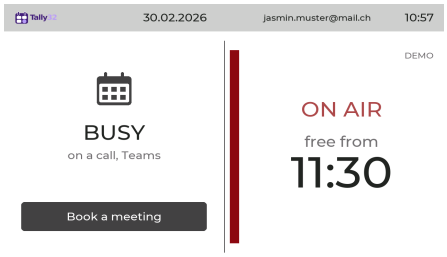


ON AIR in a meeting, with free from

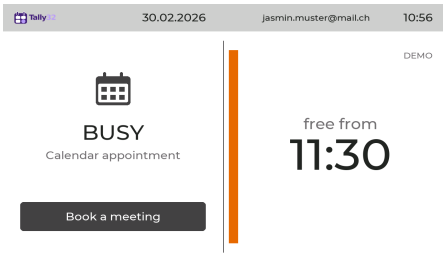


BUSY, with free from

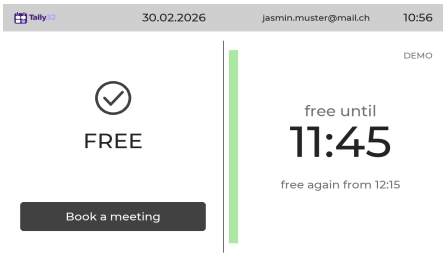


FREE until, then free from

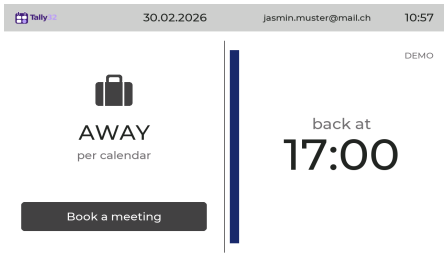

AWAY according to the calendar

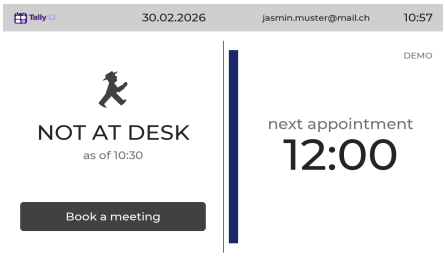

Laptop undocked, next appointment

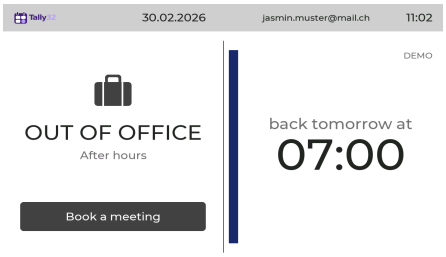

Day is over, back tomorrow at 07:00

Display

- **Seven states**: ON A CALL (ON AIR), BUSY, AWAY, FREE, NOT AT DESK, OUT OF OFFICE, NO SIGNAL.
- **Free from and free until** from the Outlook calendar. Gaps of up to 5 minutes count as busy.
- **The microphone detects calls**: Teams, 3CX, Webex, Zoom or any other app that uses it. Plus the Teams status (in a call, presenting, do not disturb, away).
- **Every state with text and symbol**, not just colour. Status colours also differ in brightness, so they stay clear for colour blind people.
- **Bilingual**: German or English, switchable in the menu (Sprache / Language).
- **Your name in the header**, colours, brightness and rotation adjustable.
- **Screen saver** when the computer is locked and after work. A tap wakes it.

Book a meeting on the display

- Visitors book a meeting on the display themselves: email, title, 15, 30 or 60 minutes, a free slot this week or next. The meeting goes into your calendar and the invitation is sent by email.
- Time window, lunch break and weekdays adjustable, at most 4 bookings per hour.

Without the laptop

- When undocked, the display keeps working from the buffered appointments: BUSY with “back approx.”, otherwise NOT AT DESK with the next appointment. A real time clock keeps the time through power cuts.

Setup and use

- Own setup Wi-Fi with a web interface for your phone, can be turned off.
- Menu right on the display (PIN protected), demo mode for presentations.
- Agent for Windows 11 and macOS with autostart, Microsoft 365 sign-in by code.

Tally32 Basic

Noncommercial licence · 10/2026

The status display for your desk. On a call, busy until, free from.

Bill of materials (BOM)

Everything you need for one desk. Stand and mounting will follow separately (3D print, in progress).

No.	Part	Details	Qty	Approx. price
1	Display GUITION JC1060P470C	7 inch IPS 1024 x 600, touch, ESP32-P4 with Wi-Fi (ESP32-C6), MIPI-DSI, real time clock, 16 MB flash. Black case, two USB-C ports (use the upper one)	1	approx. CHF 50
2	USB-C cable	USB 2.0 data cable (not a charge-only cable), length to suit the desk, 1 to 2 m. Connect to the docking station or a power supply, not directly to the laptop	1	approx. CHF 5
3	Coin cell CR1220	Backup for the real time clock, so the time survives power cuts (e.g. when undocking from an HP Dock G5)	1	approx. CHF 2
4	USB power supply 5 V, 2 A (optional)	Only if the docking station has no free USB port or the display should stay on without the laptop	0 to 1	approx. CHF 10
5	Tally32 firmware	This repository, folder firmware, flashed over USB-C without pressing a button		CHF 0
6	Tally32 agent	Python script for Windows 11 and macOS, folder agent, with autostart installer		CHF 0

Approximate prices as of 10/2026 (AliExpress or retailers). GUITION also makes the display in 4.3 inch (approx. CHF 40) and 10 inch (approx. CHF 60), firmware for these is in preparation. Total per desk around **CHF 60** without stand.

Requirements

Area	What you need
Computer	Windows 11 or macOS 14.2 or later, a free USB port on the dock or computer, Python 3.12 (installs without admin rights)
Microsoft 365	Account with an Exchange mailbox. Permissions: Calendars.ReadBasic, Presence.Read, for booking Calendars.ReadWrite. Depending on the tenant, a one-time admin consent
Network	None. The display only connects over USB. The setup Wi-Fi is a separate network without internet and can be turned off
Security	No Microsoft token on the display, token on the computer encrypted (DPAPI or Keychain). The display only shows up as a COM port, never as a keyboard or storage

Setup in four steps

Step	What to do	Time
1	Flash the firmware: `cd firmware && pio run -t upload`, display on the upper USB-C port	5 min
2	Install the agent: `install_windows.ps1` or `install_mac.sh`, sets up the Python environment and autostart	5 min
3	Sign in to Microsoft 365: `tally_agent.py login`, enter the code on the PC. For booking, first set `"booking": true` in config.json	2 min
4	On your phone, join the Wi-Fi **Tally32-XXXX** (password tally32setup), open http://192.168.4.1, admin / tally32, change the password, set name and colours	5 min

Licence and contact

Tally32 Basic is licensed under the PolyForm Noncommercial License 1.0.0. It is free for private use, non-profit organisations, education, research and public bodies. Any commercial use, for example in a company, needs a commercial licence.

Timme Security, Oliver Timme, hello@timme-security.ch. Source code, guide and spec sheet for IT: github.com/AussieCH/Tally32