Signal Processing-1.1.30

Josyula G S Avaneesh - EE25BTECH11030

March 25, 2026

Question

The frequency spectrum of a signal is shown in the figure. If this signal is ideally sampled at intervals of 1 ms, then the frequency spectrum of the sampled signal will be

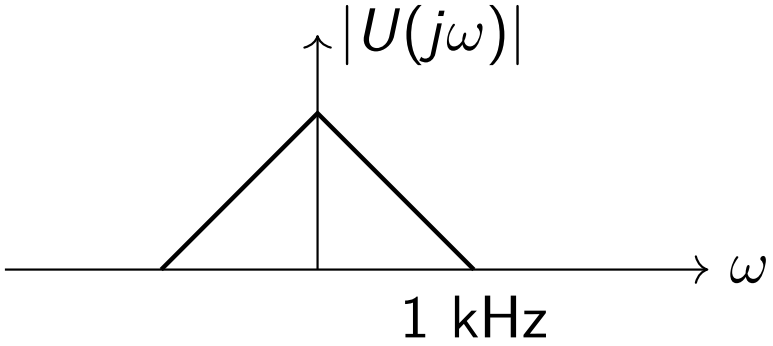

(A)

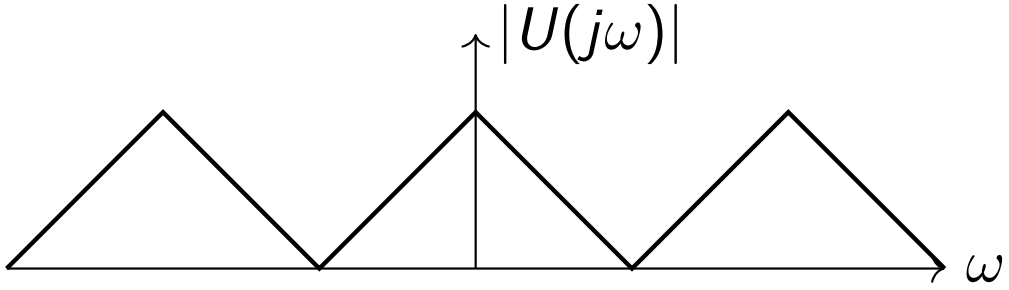

Question

(B)

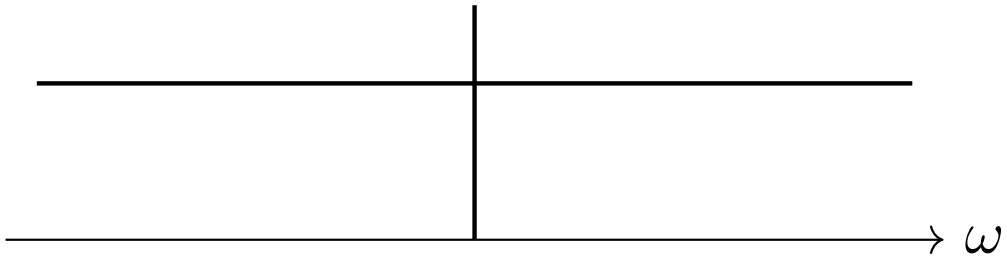

(C)

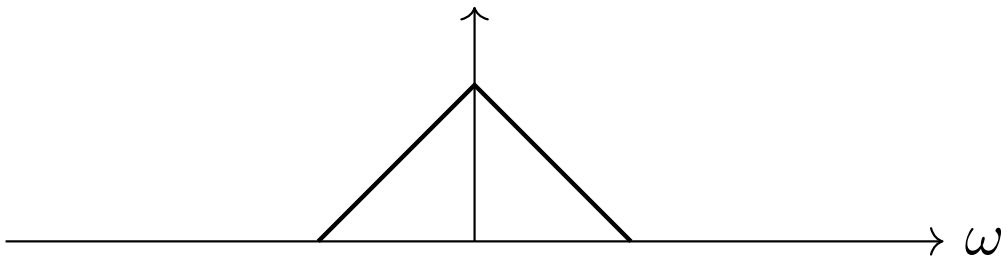

(D)

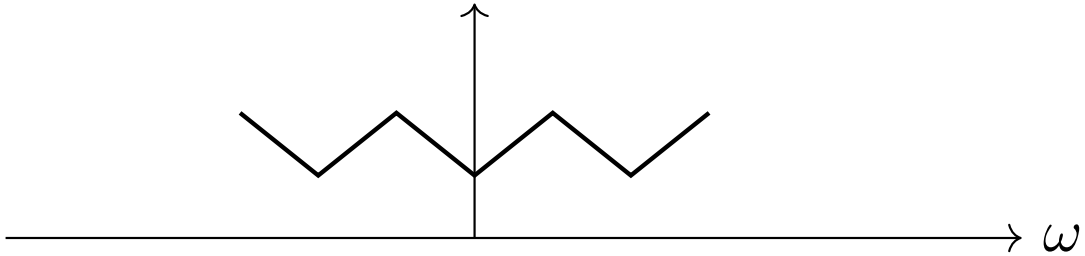

Theoretical Solution

Step 1: Analyzing the Message Signal, $m(t)$

- **The Continuous Signal:** Let the original continuous-time analog signal be the message signal, $m(t)$.
- **The Frequency Spectrum:** The problem provides the frequency spectrum, $M(\omega)$, which is a triangle spanning symmetrically from -1 kHz to $+1$ kHz.
- **Maximum Frequency Component (ω_M):** The signal is band-limited with a maximum linear frequency of $f_M = 1$ kHz. Converting to angular frequency:

$$\omega_M = 2\pi f_M = 2\pi(1000) \text{ rad/s}$$

Theoretical Solution

Step 2: Defining the Sampler and Sampling Frequency (ω_s)

- **The Impulse Train, $c(t)$:** To sample $m(t)$, it is multiplied by a periodic impulse train $c(t)$ with a sampling period T_s.
- **Calculating ω_s:** The given sampling interval is $T_s = 10^{-3}$ s. The sampling frequency, ω_s, is:

$$\omega_s = \frac{2\pi}{T_s} = 2\pi(1000) \text{ rad/s}$$

Theoretical Solution

Step 3: Constructing the Sampled Spectrum

- **Convolution in Frequency:** Multiplication in the time domain ($s(t) = m(t) \cdot c(t)$) becomes convolution in the frequency domain:

$$S(\omega) = \frac{1}{2\pi}[M(\omega) * C(\omega)]$$

- **The Impulse Train in Frequency:** A fundamental property of the Fourier transform is that the transform of a periodic impulse train in time is another infinite impulse train in frequency. So, $C(\omega)$ is represented as:

$$C(\omega) = \frac{2\pi}{T_s} \sum_{n=-\infty}^{\infty} \delta(\omega - n\omega_s)$$

- **The Sifting Property:** The Dirac delta function δ has a "sifting" property. When you convolve any spectrum $M(\omega)$ with a shifted impulse $\delta(\omega - \omega_0)$, it simply shifts the entire spectrum to that new center: $M(\omega) * \delta(\omega - \omega_0) = M(\omega - \omega_0)$.

Theoretical Solution

- **The Infinite Sum:** Substituting $C(\omega)$ into our convolution equation, the $\frac{1}{2\pi}$ and 2π terms cancel out. We apply the sifting property to every impulse in the infinite train, resulting in an infinite sum of shifted copies of the original spectrum:

$$S(\omega) = \frac{1}{T_s} \sum_{n=-\infty}^{\infty} M(\omega - n\omega_s)$$

Theoretical Solution

- **Placing the Replicas:** To visualize this, we evaluate the summation for different integers of n:
  - **Baseband ($n = 0$):** This term is $M(\omega)$. It is the exact original triangle centered at 0 rad/s, spanning from $-\omega_M$ to $+\omega_M$.
  - **First Positive Shift ($n = 1$):** This term is $M(\omega - \omega_s)$. It is an identical copy of the triangle, but its center is shifted to $+\omega_s$. It spans from $(\omega_s - \omega_M)$ to $(\omega_s + \omega_M)$.
  - **First Negative Shift ($n = -1$):** This term is $M(\omega + \omega_s)$. It is centered at $-\omega_s$ and spans from $(-\omega_s - \omega_M)$ to $(-\omega_s + \omega_M)$.

Theoretical Solution

Step 4: Deriving the Nyquist Condition

- **The Goal (No Overlap):** To accurately recover the original signal, the baseband spectrum ($n = 0$) must not mix or overlap with the shifted copies ($n = \pm 1, \pm 2, \dots$).
- **Mathematical Derivation:**
  - The highest frequency of the $n = 0$ baseband spectrum is at $+\omega_M$.
  - The lowest frequency of the adjacent $n = 1$ shifted spectrum is at $(\omega_s - \omega_M)$.
  - To prevent overlap, the start of the next triangle must be strictly greater than or equal to the end of the baseband triangle. Therefore:

$$\omega_s - \omega_M \geq \omega_M$$

Theoretical Solution

- **The Nyquist Condition:** Solving the inequality above yields the fundamental rule of sampling:

$$\omega_s \geq 2\omega_M$$

If this condition is not met, the high frequencies fold back into the lower frequencies, causing irreversible distortion known as **aliasing**.

Theoretical Solution

Step 5: Applying to the Problem and Visualizing the Result

- Here, $\omega_s = \omega_M$. The sampling frequency is exactly half of what it needs to be, guaranteeing severe aliasing.
- **Adding the Overlapping Regions:** Because $\omega_s = \omega_M$, the center of the $n = 1$ triangle (ω_s) falls exactly on the right edge of the $n = 0$ triangle. The frequency band between 0 and ω_s:
  - In this region, the $n = 0$ triangle is a straight line sloping *downward* from its peak to zero.
  - In the exact same region, the $n = 1$ triangle is a straight line sloping *upward* from zero to its peak.

Theoretical Solution

Final Conclusion: Summing a linearly decreasing function with a linearly increasing function of the exact same slope magnitude yields a constant, flat line. Because the infinite summation $\sum_{n=-\infty}^{\infty}$ continues forever, these overlapping triangles create a continuous, flat horizontal line across the entire spectrum. This perfectly matches option **(B)**.

Answer: B

Python Code

```
import numpy as np
import matplotlib.pyplot as plt

# Initialize the frequency axis.
# The range [-3, 3] kHz is selected to provide a clear view of
    the baseband and adjacent spectral replicas.
f = np.linspace(-3, 3, 1000)
@np.vectorize
def original_spectrum(freq):
    if freq < -1 or freq > 1:
        return 0.0
    elif freq >= 0:
        return 1.0 - freq
    else:
        return 1.0 + freq
# Define the sampling frequency (fs) in kHz.
fs = 1.0
```

Python Code

```
# Initialize an array to store the accumulated sum of all
    spectral replicas.
sampled_spectrum = np.zeros_like(f)
# Initialize a list to store individual shifted spectra for
    visualization purposes.
replicas = []
# Simulate the infinite summation of the sampled spectrum.
# A finite range (n = -5 to 5) is utilized as an approximation
    for computational feasibility.
n_values = range(-5, 6)
for n in n_values:
    # Calculate the frequency shift for the nth harmonic: M(f - n
        *fs).
    shifted_triangle = original_spectrum(f - n * fs)
    replicas.append(shifted_triangle)
    # Superimpose the shifted spectrum onto the total sampled
        spectrum array.
    sampled_spectrum += shifted_triangle
```

Python Code

```
plt.figure(figsize=(10, 6))

# Plot the individual shifted spectral replicas.
for i, replica in enumerate(replicas):
    if i == 5: # Highlights the n=0 baseband spectrum in the
        legend.
        plt.plot(f, replica, '--', color='blue', alpha=0.6, label
            ='Individual Shifted Spectra')
    else:
        plt.plot(f, replica, '--', color='blue', alpha=0.6)

# Plot the final superimposed spectrum to illustrate aliasing
    effects.
plt.plot(f, sampled_spectrum, '-', color='red', linewidth=3,
    label='Final Sampled Spectrum (Sum)')
```

Python Code

```
# Formatting the plot
plt.title('Frequency Spectrum of Ideally Sampled Signal ($f_s = 1
    $ kHz)')
plt.xlabel('Frequency (kHz)')
plt.ylabel('Amplitude')
plt.xlim(-3, 3)
plt.ylim(0, 1.5)
plt.grid(True, linestyle=':', alpha=0.7)
plt.legend()

# Displaying the figure
plt.tight_layout()
plt.savefig("../plot.png")
plt.show()
```

Plot

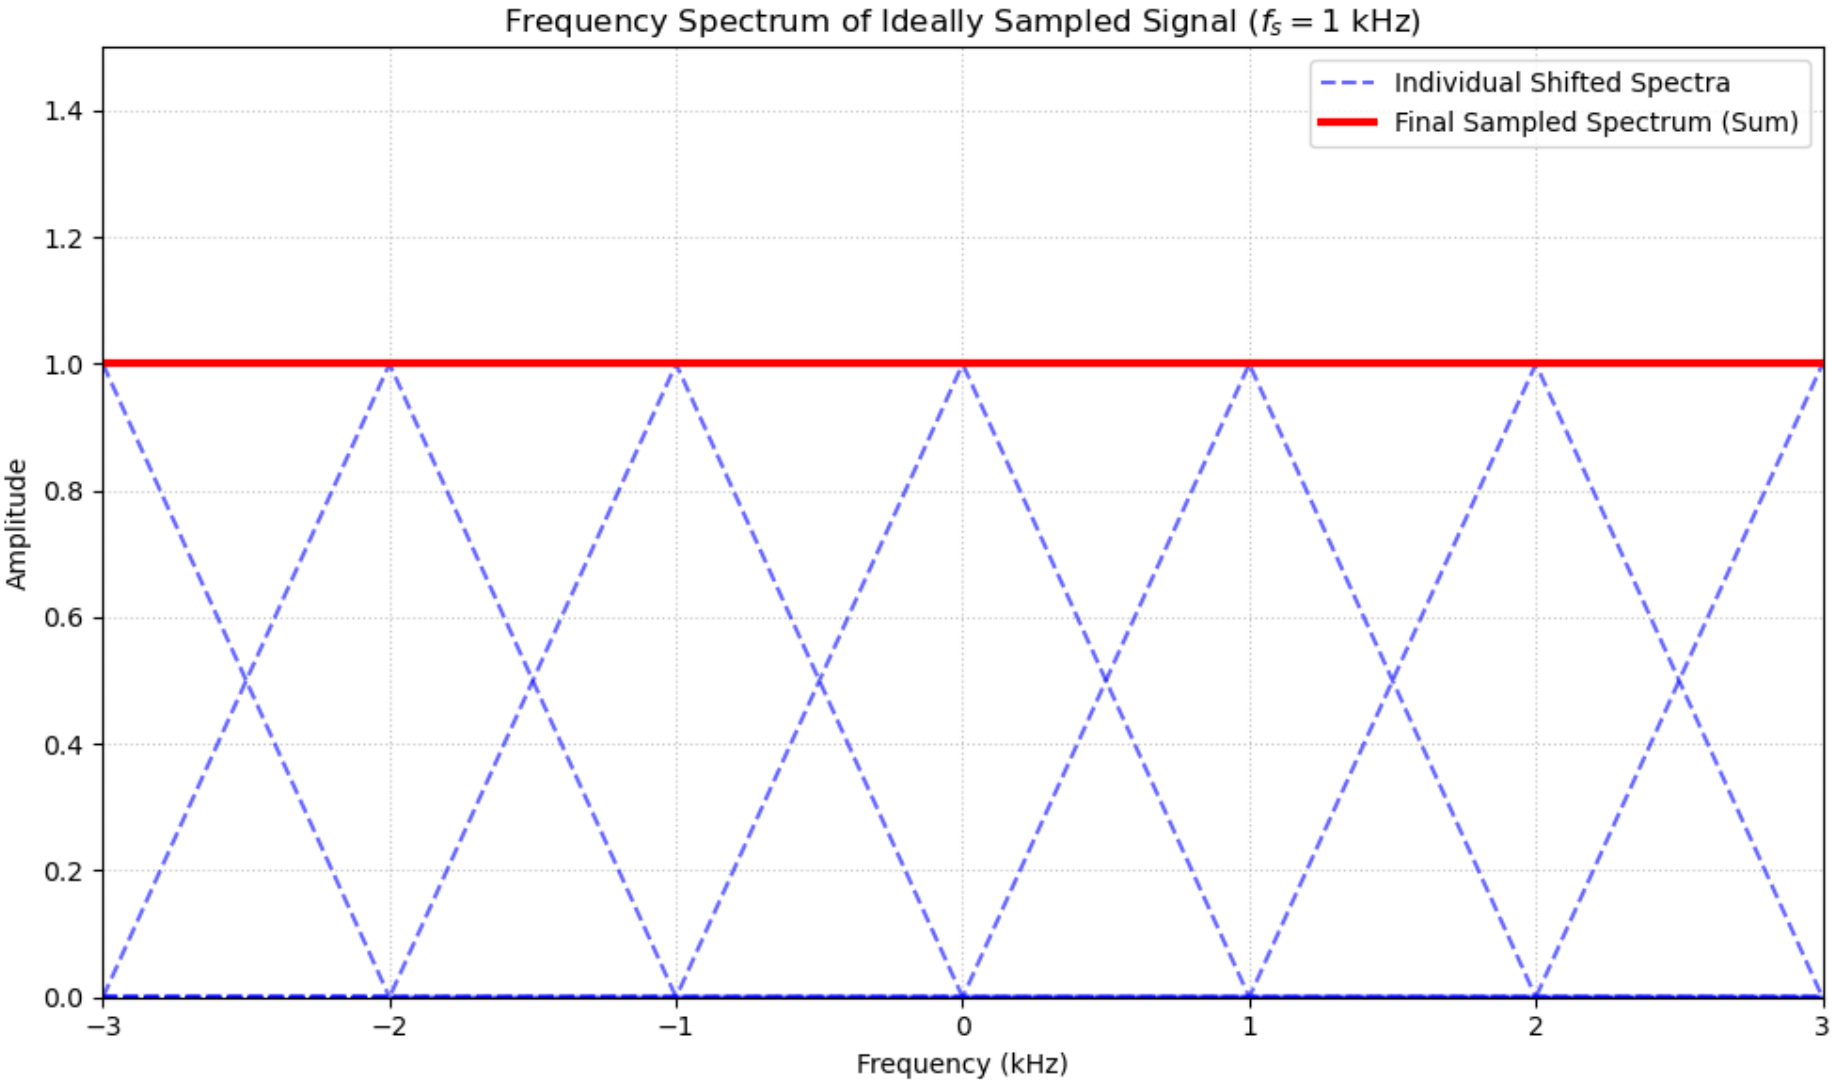
Frequency Spectrum of Ideally Sampled Signal ($f_s = 1$ kHz)
Individual Shifted Spectra
Final Sampled Spectrum (Sum)
Amplitude
Frequency (kHz)
0.0
0.2
0.4
0.6
0.8
1.0
1.2
1.4
−3
−2
−1
0
1
2
3