

# Digital Signal Processing

G V V Sharma\*

## CONTENTS

1	Software Installation	1
2	Digital Filter	1
3	Difference Equation	2
4	Z-transform	2
5	Impulse Response	5
6	DFT and FFT	6
7	Exercises	6

**Abstract**—This manual provides a simple introduction to digital signal processing.

## 1 SOFTWARE INSTALLATION

Run the following commands

```
sudo apt-get update
sudo apt-get install libffi-dev libsndfile1 python3
  -scipy python3-numpy python3-matplotlib
sudo pip install cffi pysoundfile
```

## 2 DIGITAL FILTER

### 2.1 Download the sound file from

```
wget https://github.com/AvinashNayak27/
  digital/blob/master/codes/Sound_Noise.
  wav
```

2.2 You will find a spectrogram at <https://academo.org/demos/spectrum-analyzer>. Upload the sound file that you downloaded in Problem 2.1 in the spectrogram and play. Observe the spectrogram. What do you find?

**Solution:** There are a lot of yellow lines between 440 Hz to 5.1 KHz. These represent the synthesizer key tones. Also, the key strokes are audible along with background noise.

2.3 Write the python code for removal of out of band noise and execute the code.

**Solution:**

```
import soundfile as sf
from scipy import signal

#read .wav file
input_signal,fs = sf.read('Sound_Noise.wav')

#sampling frequency of Input signal
sampler_freq=fs

#order of the filter
order=4

#cutoff frequency 4kHz
cutoff_freq=4000.0

#digital frequency
Wn=2*cutoff_freq/sampler_freq

# b and a are numerator and denominator
  polynomials respectively
b, a = signal.butter(order,Wn, 'low')

#filter the input signal with butterworth filter
output_signal = signal.filtfilt(b, a,
  input_signal)
#output_signal = signal.lfilter(b, a,
  input_signal)

#write the output signal into .wav file
sf.write('Sound_With_ReducedNoise.wav',
  output_signal, fs)
```

2.4 The output of the python script in Problem 2.3 is the audio file Sound\_With\_ReducedNoise.wav. Play

\*The author is with the Department of Electrical Engineering, Indian Institute of Technology, Hyderabad 502285 India e-mail: gadepall@iith.ac.in. All content in the manuscript is released under GNU GPL. Free to use for anything.

the file in the spectrogram in Problem 2.2. What do you observe?

**Solution:** The key strokes as well as background noise is subdued in the audio. Also, the signal is blank for frequencies above 5.1 kHz.

### 3 DIFFERENCE EQUATION

3.1 Let

$$x(n) = \left\{ \underset{\uparrow}{1}, 2, 3, 4, 2, 1 \right\} \quad (3.1)$$

Sketch  $x(n)$ .

3.2 Let

$$y(n) + \frac{1}{2}y(n-1) = x(n) + x(n-2),$$

$$y(n) = 0, n < 0 \quad (3.2)$$

Sketch  $y(n)$ .

**Solution:** The following code yields Fig. 3.2.

```
wget https://github.com/AvinashNayak27/
digital/blob/master/codes/xnyn.py
```

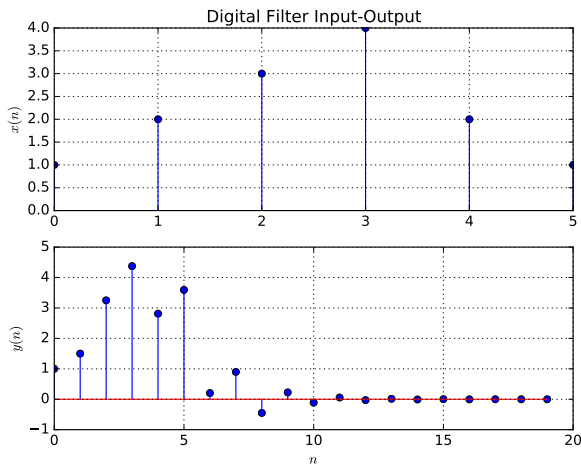


Fig. 3.2

3.3 Repeat the above exercise using a C code.

**Solution:** Download the C code from the below link,

```
wget https://github.com/AvinashNayak27/
digital/blob/master/codes/3.3.1.c
```

Then run the following command in terminal

```
gcc 3.3.1.c
./a.out
```

Then for the plot ?? download the python file from the below link,

```
wget https://github.com/AvinashNayak27/
digital/blob/master/codes/3.3.2.py
```

Then run the command

```
python3 3.3.2.py
```

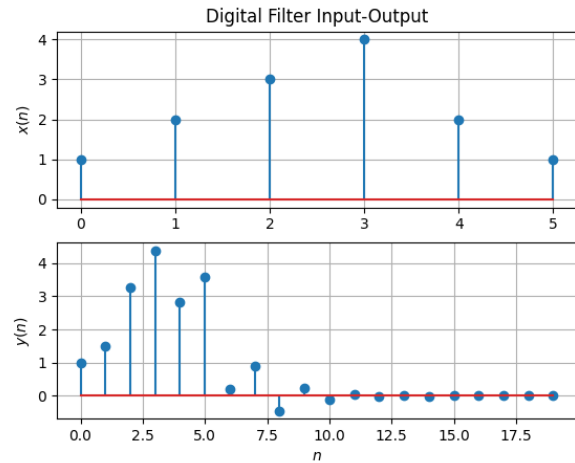


Fig. 3.3: Plot using C code

### 4 Z-TRANSFORM

4.1 The Z-transform of  $x(n]$  is defined as

$$X(z) = \mathcal{Z}\{x(n)\} = \sum_{n=-\infty}^{\infty} x(n)z^{-n} \quad (4.1)$$

Show that

$$\mathcal{Z}\{x(n-1)\} = z^{-1}X(z) \quad (4.2)$$

and find

$$\mathcal{Z}\{x(n-k)\} \quad (4.3)$$

**Solution:** Given that,

$$X(z) = \mathcal{Z}\{x(n)\} \quad (4.4)$$

$$= \sum_{n=-\infty}^{\infty} x(n)z^{-n} \quad (4.5)$$

So,

$$\mathcal{Z}\{x(n-1)\} = \sum_{n=-\infty}^{\infty} x(n-1)z^{-n} \quad (4.6)$$

Take  $k = n - 1$ ,

$$= \sum_{k=-\infty}^{\infty} x(k) z^{-(k+1)} \quad (4.7)$$

$$= z^{-1} \sum_{k=-\infty}^{\infty} x(k) z^{-k} \quad (4.8)$$

$$= z^{-1} \sum_{n=-\infty}^{\infty} x(n) z^{-n} \quad (4.9)$$

$$= z^{-1} X(z) \quad (4.10)$$

resulting in (4.2) and similarly following the above steps you will get,

$$\mathcal{Z}\{x(n-k)\} = z^{-k} X(z) \quad (4.11)$$

Hence proved.

4.2 Obtain  $X(z)$  for  $x(n)$  defined in problem 3.1.

**Solution:** Now we will find Z transform of the signal  $x(n)$ , from (??),

$$\mathcal{Z}\{x(n)\} = \sum_{n=0}^5 x(n) z^{-n} \quad (4.12)$$

$$= 1z^0 + 2z^{-1} + 3z^{-2} + 4z^{-3} + 2z^{-4} + 1z^{-5} \quad (4.13)$$

$$= 1 + 2z^{-1} + 3z^{-2} + 4z^{-3} + 2z^{-4} + z^{-5} \quad (4.14)$$

4.3 Find

$$H(z) = \frac{Y(z)}{X(z)} \quad (4.15)$$

from (3.2) assuming that the Z-transform is a linear operation.

**Solution:** Applying (4.11) in (3.2),

$$Y(z) + \frac{1}{2}z^{-1}Y(z) = X(z) + z^{-2}X(z) \quad (4.16)$$

$$\Rightarrow \frac{Y(z)}{X(z)} = \frac{1 + z^{-2}}{1 + \frac{1}{2}z^{-1}} \quad (4.17)$$

**Solution:** Now we will rewrite (3.2),

$$y(n) + \frac{1}{2}y(n-1) = x(n) + x(n-2) \quad (4.18)$$

Now since Z-transform is a linear operator we can write that,

$$Y(z) + \frac{1}{2}Y(z)z^{-1} = X(z) + X(z)z^{-2} \quad (4.19)$$

From (4.11),

$$Y(z) + \frac{z^{-1}}{2}Y(z) = X(z) + z^{-2}X(z) \quad (4.20)$$

$$\Rightarrow \frac{Y(z)}{X(z)} = \frac{1 + z^{-2}}{1 + \frac{z^{-1}}{2}} \quad (4.21)$$

4.4 Find the Z transform of

$$\delta(n) = \begin{cases} 1 & n = 0 \\ 0 & \text{otherwise} \end{cases} \quad (4.22)$$

and show that the Z-transform of

$$u(n) = \begin{cases} 1 & n \geq 0 \\ 0 & \text{otherwise} \end{cases} \quad (4.23)$$

is

$$U(z) = \frac{1}{1 - z^{-1}}, \quad |z| > 1 \quad (4.24)$$

**Solution:** The Z-transform of  $\delta n$  is,

$$\mathcal{Z}\{\delta n\} = \sum_{n=-\infty}^{\infty} \delta(n) z^{-n} \quad (4.25)$$

$$= \delta(0) z^0 + 0 \quad (\text{Using (4.22)}) \quad (4.26)$$

$$= 1 \quad (4.27)$$

and the Z-transform of unit-step function  $u(n)$  is,

$$U(z) = \sum_{n=-\infty}^{\infty} u(n) z^{-n} \quad (4.28)$$

$$= 0 + \sum_{n=0}^{\infty} 1 \cdot z^{-n} \quad (4.29)$$

$$= 1 + z^{-1} + z^{-2} + \dots \quad (4.30)$$

Above is a infinite geometric series with  $z^{-1}$  as common ratio, so we can write it as

$$U(z) = \frac{1}{1 - z^{-1}} \because |z| > 1 \quad (4.31)$$

4.5 Show that

$$a^n u(n) \stackrel{\mathcal{Z}}{\Leftrightarrow} \frac{1}{1 - az^{-1}} \quad |z| > |a| \quad (4.32)$$

**Solution:** The Z-transform will be

$$\mathcal{Z}\{a^n u(n)\} = \sum_{n=0}^{\infty} a^n z^{-n} \quad (4.33)$$

$$= 1 + \frac{a}{z} + \left(\frac{a}{z}\right)^2 + \dots \quad (4.34)$$

Above is a infinite geometric series with first

term 1 and common ratio as  $\frac{a}{z}$  and it can be written as,

$$\mathcal{Z}\{a^n u(n)\} = \frac{1}{1 - \frac{a}{z}} \because |a| < |z| \quad (4.35)$$

Therefore,

$$a^n u(n) \stackrel{\mathcal{Z}}{\rightleftharpoons} \frac{1}{1 - az^{-1}} \quad |z| > |a| \quad (4.36)$$

4.6 Let

$$H(e^{j\omega}) = H(z = e^{j\omega}). \quad (4.37)$$

Plot  $|H(e^{j\omega})|$ . Comment.  $H(e^{j\omega})$  is known as the *Discret Time Fourier Transform (DTFT)* of  $h(n)$ .

**Solution:** Download the code for the plot 4.6 from the link below

wget <https://github.com/AvinashNayak27/digital/blob/master/codes/dtft.py>

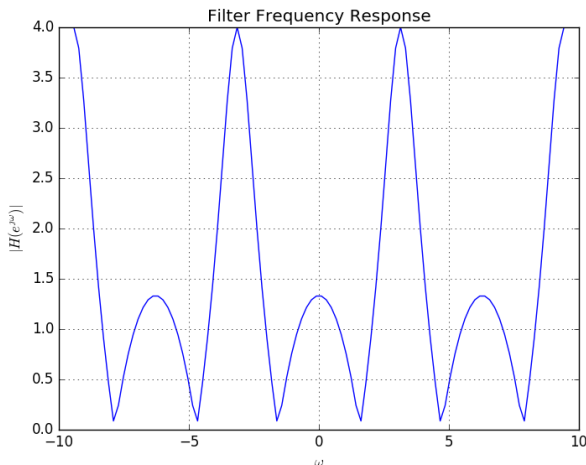


Fig. 4.6:  $|H(e^{j\omega})|$

Now using (4.17), we will find  $|H(e^{j\omega})|$ ,

$$H(e^{j\omega}) = \frac{1 + e^{-2j\omega}}{1 + \frac{e^{-j\omega}}{2}} \quad (4.38)$$

$$\Rightarrow |H(e^{j\omega})| = \frac{|1 + e^{-2j\omega}|}{|1 + \frac{e^{-j\omega}}{2}|} \quad (4.39)$$

$$= \frac{|1 + e^{2j\omega}|}{|e^{2j\omega} + \frac{e^{j\omega}}{2}|} \quad (4.40)$$

$$= \frac{|1 + \cos 2\omega + j \sin 2\omega|}{|e^{j\omega} + \frac{1}{2}|} \quad (4.41)$$

$$= \frac{|4 \cos^2(\omega) + 4j \sin(\omega) \cos(\omega)|}{|2e^{j\omega} + 1|} \quad (4.42)$$

$$= \frac{|4 \cos(\omega)| |\cos(\omega) + j \sin(\omega)|}{|2 \cos(\omega) + 1 + 2j \sin(\omega)|} \quad (4.43)$$

$$\therefore |H(e^{j\omega})| = \frac{|4 \cos(\omega)|}{\sqrt{5 + 4 \cos(\omega)}} \quad (4.44)$$

Since  $|H(e^{j\omega})|$  is function of cosine we can say it is periodic. And from the plot 4.6 we can say that it is symmetric about  $\omega = 0$  (even function) and it is periodic with period  $2\pi$ . You can find the same from the theoretical expression  $|H(e^{j\omega})|$ ,

$$H(e^{j\omega}) = H(e^{j(-\omega)}) \quad (\cos \text{ is an even function}) \quad (4.45)$$

And to find period, the period of  $|\cos(\omega)|$  is  $\pi$  and the period of  $\sqrt{5 + 4 \cos(\omega)}$  is  $2\pi$ . So the period of division of both will be,

$$\text{lcm}(\pi, 2\pi) = 2\pi \quad (4.46)$$

This gives us the period of  $|H(e^{j\omega})|$  as  $2\pi$

4.7 Express  $h(n)$  in terms of  $H(e^{j\omega})$ .

**Solution:** We know that

$$H(e^{j\omega}) = \sum_{k=-\infty}^{\infty} h(k) e^{-j\omega k} \quad (4.47)$$

$$\Rightarrow \frac{1}{2\pi} \int_{-\pi}^{\pi} H(e^{j\omega}) e^{j\omega n} d\omega \quad (4.48)$$

$$= \frac{1}{2\pi} \int_{-\pi}^{\pi} \sum_{k=-\infty}^{\infty} h(k) e^{-j\omega k} e^{j\omega n} d\omega \quad (4.49)$$

$$= \frac{1}{2\pi} \sum_{k=-\infty}^{\infty} h(k) \int_{-\pi}^{\pi} e^{j\omega(n-k)} d\omega \quad (4.50)$$

$$= \frac{1}{2\pi} \left\{ \sum_{k \neq n} h(k) \frac{e^{j\omega(n-k)}}{j(n-k)} \right\}_{-\pi}^{\pi} + h(n) \cdot 2\pi \quad (4.51)$$

$$= \frac{0 + 2\pi h(n)}{2\pi} \quad (4.52)$$

$$= h(n) \quad (4.53)$$

$$\therefore h(n) = \frac{1}{2\pi} \int_{-\pi}^{\pi} H(e^{j\omega}) e^{j\omega n} d\omega \quad (4.54)$$

## 5 IMPULSE RESPONSE

5.1 Using long division, find

$$h(n), \quad n < 5 \quad (5.1)$$

for  $H(z)$  in (4.17).

5.2 Find an expression for  $h(n)$  using  $H(z)$ , given that

$$h(n) \stackrel{Z}{\rightleftharpoons} H(z) \quad (5.2)$$

and there is a one to one relationship between  $h(n)$  and  $H(z)$ .  $h(n)$  is known as the *impulse response* of the system defined by (3.2).

**Solution:** From (4.17),

$$H(z) = \frac{1}{1 + \frac{1}{2}z^{-1}} + \frac{z^{-2}}{1 + \frac{1}{2}z^{-1}} \quad (5.3)$$

$$\Rightarrow h(n) = \left(-\frac{1}{2}\right)^n u(n) + \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.4)$$

using (4.32) and (??).

5.3 Sketch  $h(n)$ . Is it bounded? Justify theoretically.

**Solution:** The following code plots Fig. 5.3.

```
wget https://github.com/AvinashNayak27/digital/blob/master/codes/hn.py
```

5.4 Convergent? Justify using the ratio test.

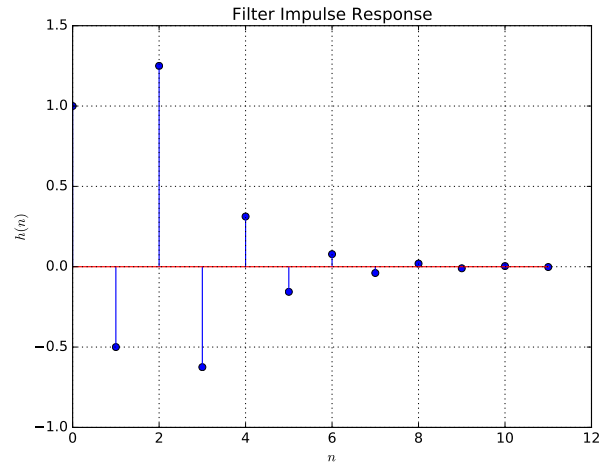


Fig. 5.3:  $h(n)$  as the inverse of  $H(z)$

5.5 The system with  $h(n)$  is defined to be stable if

$$\sum_{n=-\infty}^{\infty} h(n) < \infty \quad (5.5)$$

Is the system defined by (3.2) stable for the impulse response in (5.2)?

5.6 Verify the above result using a python code.

5.7 Compute and sketch  $h(n)$  using

$$h(n) + \frac{1}{2}h(n-1) = \delta(n) + \delta(n-2), \quad (5.6)$$

This is the definition of  $h(n)$ .

**Solution:** The following code plots Fig. 5.7. Note that this is the same as Fig. 5.3.

```
wget https://github.com/AvinashNayak27/digital/blob/master/codes/hndef.py
```

5.8 Compute

$$y(n) = x(n) * h(n) = \sum_{k=-\infty}^{\infty} x(k)h(n-k) \quad (5.7)$$

Comment. The operation in (5.7) is known as *convolution*.

**Solution:** The following code plots Fig. 5.8. Note that this is the same as  $y(n)$  in Fig. 3.2.

```
wget https://github.com/AvinashNayak27/digital/blob/master/codes/ynconv.py
```

5.9 Express the above convolution using a Teoplitz matrix.

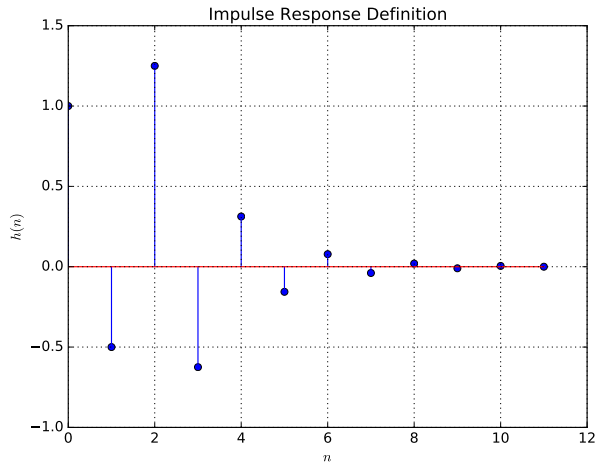


Fig. 5.7:  $h(n)$  from the definition

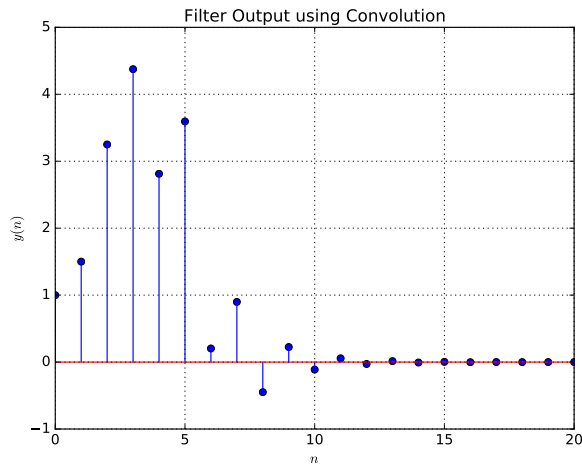


Fig. 5.8:  $y(n)$  from the definition of convolution

5.10 Show that

$$y(n) = \sum_{k=-\infty}^{\infty} x(n-k)h(k) \quad (5.8)$$

## 6 DFT AND FFT

6.1 Compute

$$X(k) \triangleq \sum_{n=0}^{N-1} x(n)e^{-j2\pi kn/N}, \quad k = 0, 1, \dots, N-1 \quad (6.1)$$

and  $H(k)$  using  $h(n)$ .

6.2 Compute

$$Y(k) = X(k)H(k) \quad (6.2)$$

6.3 Compute

$$y(n) = \frac{1}{N} \sum_{k=0}^{N-1} Y(k) \cdot e^{j2\pi kn/N}, \quad n = 0, 1, \dots, N-1 \quad (6.3)$$

**Solution:** The following code plots Fig. 5.8. Note that this is the same as  $y(n)$  in Fig. 3.2.

wget <https://github.com/AvinashNayak27/digital/blob/master/codes/yndft.py>

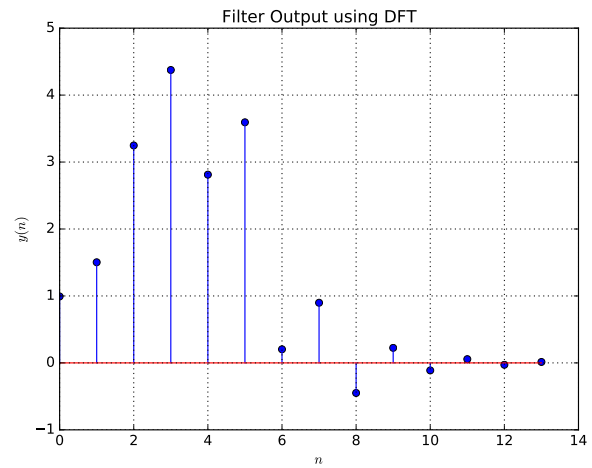


Fig. 6.3:  $y(n)$  from the DFT

6.4 Repeat the previous exercise by computing  $X(k)$ ,  $H(k)$  and  $y(n)$  through FFT and IFFT.

6.5 Wherever possible, express all the above equations as matrix equations.

6.6 Verify the above equations by generating the DFT matrix in python.

## 7 EXERCISES

Answer the following questions by looking at the python code in Problem 2.3.

7.1 The command

```
output_signal = signal.lfilter(b, a,
                               input_signal)
```

in Problem 2.3 is executed through the following difference equation

$$\sum_{m=0}^M a(m)y(n-m) = \sum_{k=0}^N b(k)x(n-k) \quad (7.1)$$

where the input signal is  $x(n)$  and the output signal is  $y(n)$  with initial values all 0. Replace **signal.filtfilt** with your own routine and verify.

7.2 Repeat all the exercises in the previous sections for the above  $a$  and  $b$ .

7.3 What is the sampling frequency of the input signal?

**Solution:** Sampling frequency( $f_s$ )=44.1kHz.

7.4 What is type, order and cutoff-frequency of the above butterworth filter

**Solution:** The given butterworth filter is low pass with order=2 and cutoff-frequency=4kHz.

7.5 Modifying the code with different input parameters and to get the best possible output.