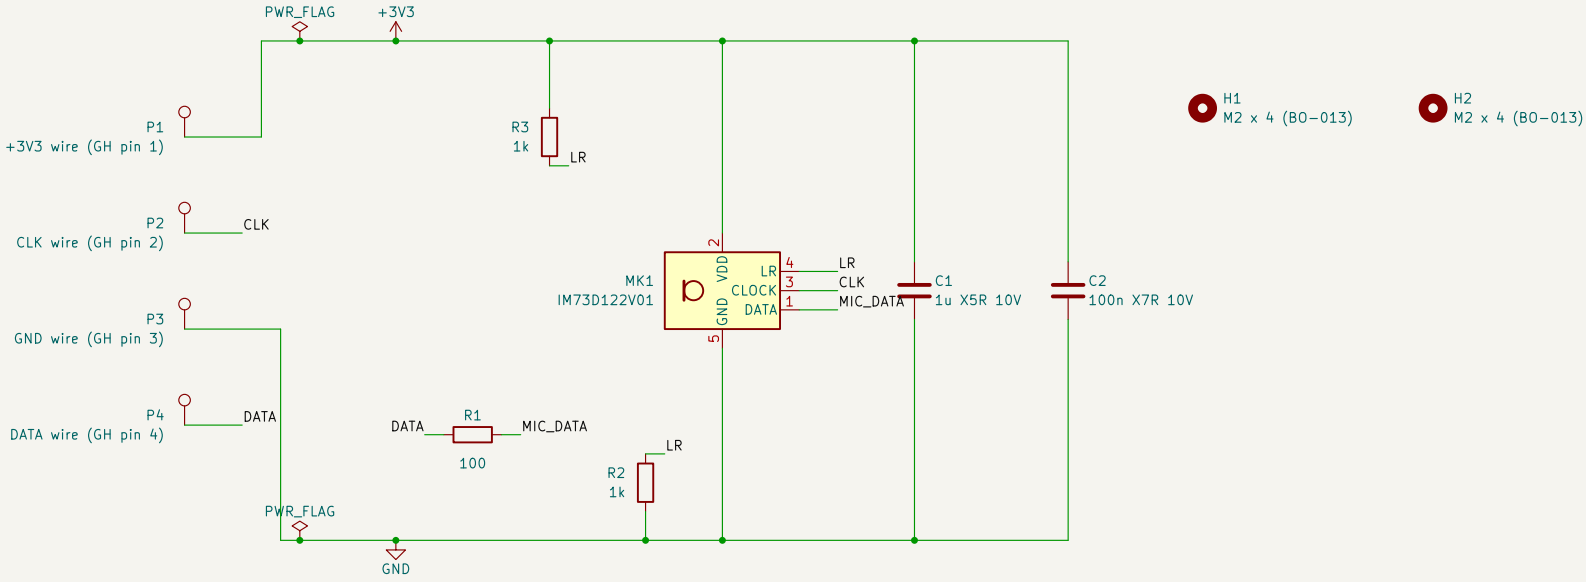


MK1: IM73D122V01 bottom-port PDM mic over a Ø0.8 hole (in its footprint), pads 1 DATA, 2 VDD, 3 CLOCK, 4 LR, 5 GND ring.
C1 1 uF at VDD (datasheet Table 5 note 4) and C2 100 nF (datasheet 3.5). R1 100 R in DATA at the mic: source termination for the 150–200 mm W27 lead (datasheet 3.5: about 100 R).

LR strap, one design for four positions (D-066): fit R2 OR R3, never both.
L variant (FRONT_L, REAR_L): R2 1k LR to GND, mic drives DATA after the falling clock edge.
R variant (FRONT_R, REAR_R): R3 1k LR to +3V3, mic drives DATA after the rising clock edge.
1k, not OR, so a double fit cannot short the mic rail.

P1–P4: wire pads on the inner face for the W27 pre-crimped GH 4-way AWG28 lead (D-037), in GH pin order:
1 +3V3, 2 CLK, 3 GND, 4 DATA. GND sits between CLK and DATA. PCB-05 J5-2..5 must use the same order.
H1, H2: Ø2.2 holes for the M2 x 4 screws into the shell boss, ±5 mm from the port.

Spec: docs/03-build/04-pcbs/pcb-06-pdm-mic/README.md
One IM73D122V01 per board, four boards, L/R by assembly variant (D-037, D-066)

Makad

Sheet: /
File: pcb-06-pdm-mic.kicad_sch

Title: PCB-06 PDM microphone board

Size: A4	Date: 2026-10-26	**Rev: A**
KiCad E.D.A. 10.99.0-5923-gde08734017		Id: 1/1