

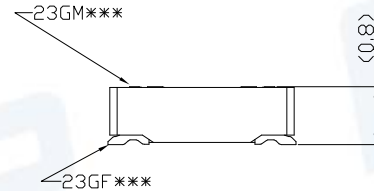
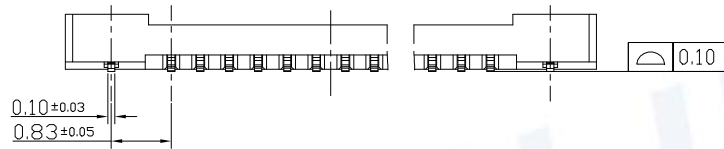



REV.	DESCRIPTION OF REVISIONS	APPR.	CHEC.	DRAW.	DATE
△	New			Xfang	2023/4/26

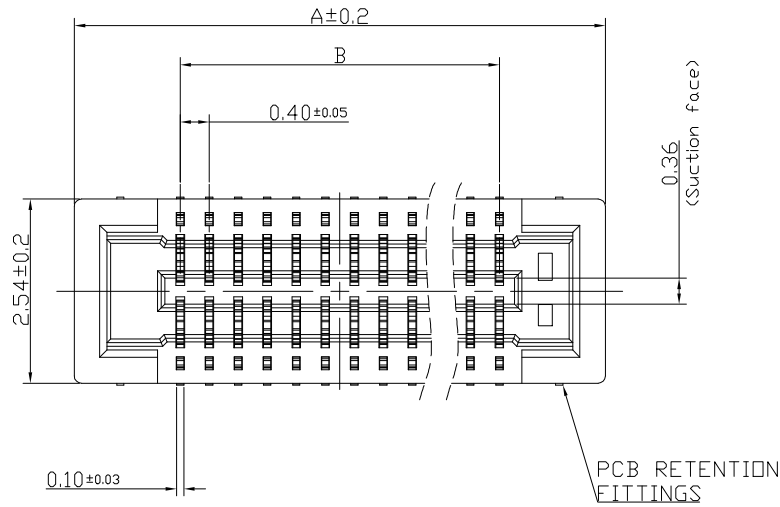

MATING SECTION

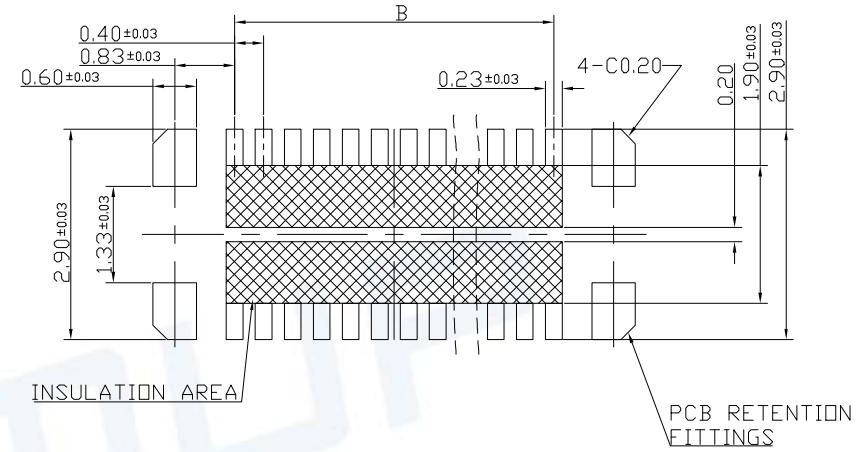

RECOMMENDED PCB LAYOUT

Specifications

1) Material:

- 1-1. Molded portion: LCP resin (UL94V-0)
- 1-2. Contact and Post: Copper alloy.

2) Surface treatment:

- 2-1. Terminal portion: Base: Ni plating Surface
Au plating (except the terminal tips) Au plating Surface
Exposed nickel portions
- 2-2. Metal dips: Base: Ni plating Surface: Au flash plating (except the terminal tips) Or Base:
Ni plating Surface: Sn flash plating (except the terminal tips)

3) Characteristics

- 3-1. Rated voltage: 60V AC/DC
- 3-2. Rated current: 0.3A/contact (Max. 5A at total contact)
- 3-3. Insulation resistance: Min. 1000M Ω (initial)
- 3-4. Breakdown voltage: 150V AC for 1 min
- 3-5. Salt water spray resistance (header and socket mated): 24 hours, insulation resistance min. 100M Ω , contact resistance max. 90m Ω
- 3-6. Contact resistance: Max. 90m Ω
- 3-7. Ambient temperature: -55°C +85°C
- 3-8. Storage temperature: -55°C +85°C (product only); -40°C +50°C (emboss packing)
- 3-9. Composite insertion force: Max. 0.981N/contact X contacts (initial)
- 3-10. Composite removal force: Min. 0.165N/contact X contacts
- 3-11. Post holding force: Min. 0.49N/contact
- 3-12. Insertion and removal life: 30 times

TABLE

Products P/N		OK-23GF***-04	
MUP-B6023-10	40	10.52	7.60
MUP-B6023-12	34	9.32	6.40
MUP-B6023-09	30	8.52	5.60
MUP-B6023-04	24	7.32	4.40
MUP-B6023-03	16	5.72	2.80
MUP-B6023-01	10	4.52	1.60
MODEL NO	NUMBER OF CONTACTS	A	B

Unless otherwise specified, other tolerance are:			® MUP MUP INDUSTRIAL CO.,LTD.		
X	±0.35	X*	±5°	NAME: BTB Connector	
X.X	±0.25	X.X*	±4°	MODEL NO: MUP-B6023-01	
X.XX	±0.20	X.XX*	±3°	TYPE : 0.4mm BTB (MATING HEIGHT 0.8H)	
X.XXX	±0.10	X.XXX*	±2°		
PROJ.		UNIT	SCALE	DRAWN	Xfang Apr 26, 2023
		mm	1:1	DWG NO.:	
CUSTOMER DRAWING				CHECKED	HUABO Apr 26, 2023
				APPROVAL	Simon Apr 26, 2023
				SHEET	1/1
				REVISION	1

