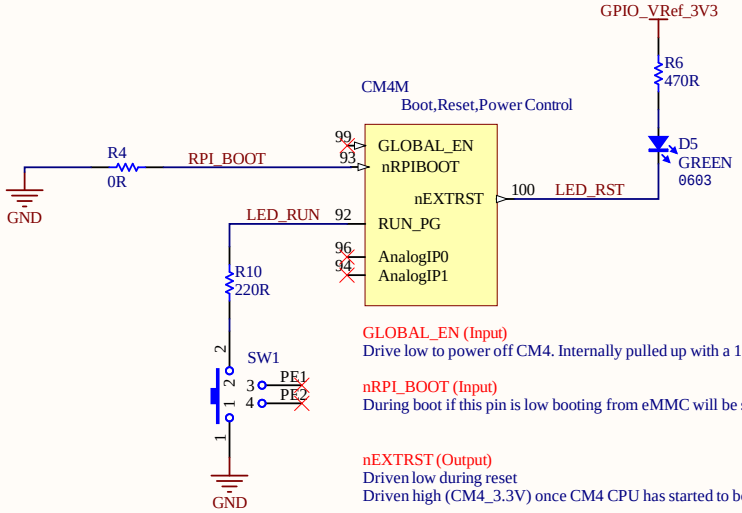

GLOBAL_EN (Input)
Drive low to power off CM4. Internally pulled up with a 100K to +5V

nRPI_BOOT (Input)
During boot if this pin is low booting from eMMC will be stopped and booting will be transferred to rpi boot which is via

nEXTRST (Output)
Driven low during reset
Driven high (CM4_3.3V) once CM4 CPU has started to boot

RUN_PG

Bidirectional pin. Internally pulled up to +3.3V via 10K

>Input
Can be driven low (via a 220R resistor) to Reset the CM4 CPU.

Ouput >
Output a high signals Power Good and CPU running.

Analog IP0,IP1
Analog input of the MAX7704. Typically connected to CC pin of Type C power connector
Raspberry Pi Compute Module 4

CM4O
EEPROM Protect



Leaving floating NB internally pulled up to CM4_3.3V via 100K (VIL <0.8V) but can be grounded to prevent writing to the on board EEPROM which stores the bootcode
Raspberry Pi Compute Module 4

CM4K
BT_nDisable
Can be left floating if driven low the Bluetooth interface will be disabled. Internal pulled up via 1.8K to CM4_3.3V

BT,WiFi Control



WL_nDisable
Can be left floating if driven low the wireless interface will be disabled. Internal pulled up via 1.8K to CM4_3.3V

Raspberry Pi Compute Module 4

Title *			*Q-Wave Systems Co.,Ltd* *65/2 Moo 1 Beung* *Sriracha Chonburi* *Thailand*
Size: A4	Number:*	Revision:*	
Date: 1/15/2021	Time: 4:53:36 PM	Sheet * of *	
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\BT WiFi Power Reset Control.SchDoc			

Q-WAVE SYSTEMS

1.5mm with mating connector (clearance under CM4 0mm) : DF40C-100DS-0.4v

DF40C-100DS-0.4V

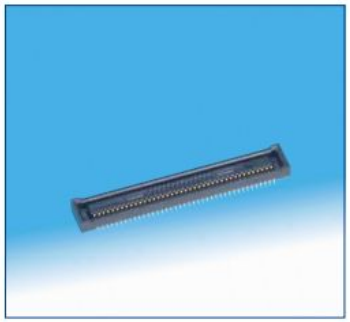

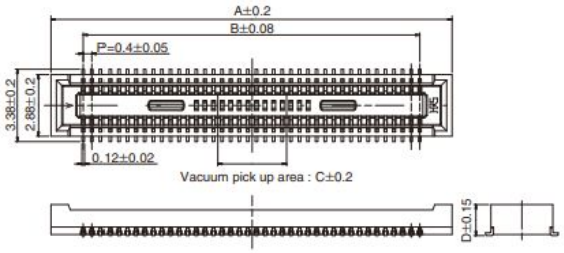

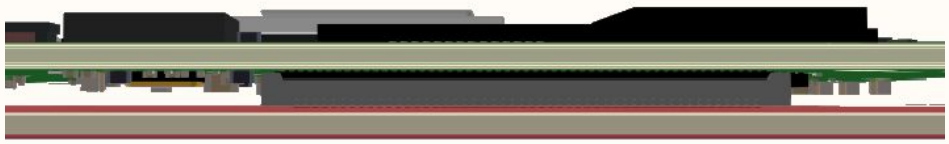

3.0mm with mating connector (clearance under CM4 1.5mm): DF40HC(3.0)-100DS-0.4v

DF40HC(3.0)-100DS-0.4V

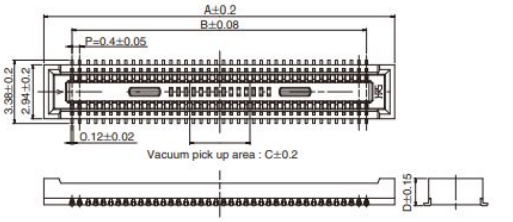

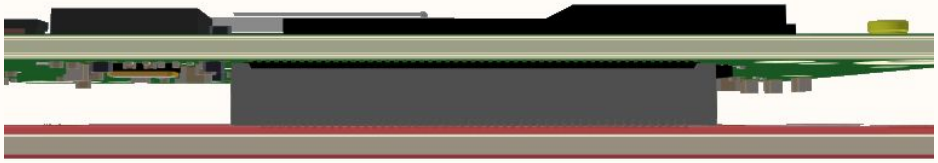

Title *			*Q-Wave Systems Co.,Ltd* *65/2 Moo 1 Beung* *Sriracha Chonburi* *Thailand*
Size: A4	Number:*	Revision:*	
Date: 1/15/2021 Time: 4:53:37 PM	Sheet * of *		
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\Connector.SchDoc			

CM4D

CAM0

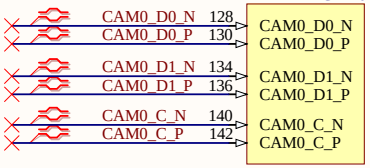

The CM4 supports two camera ports; CAM0 (2 lanes) and CAM1 (4 lanes).

Camera sensors supported by the official Raspberry Pi firmware are; the OmniVision OV5647, Sony IMX219 and Sony
IMX477, no security device is required on Compute Module devices to use these camera sensors.

Raspberry Pi Compute Module 4

CM4E

CAM1

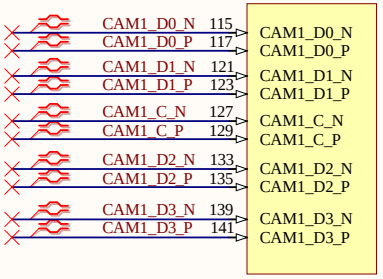

The CM4 supports two camera ports; CAM0 (2 lanes) and CAM1 (4 lanes).

Camera sensors supported by the official Raspberry Pi firmware are; the OmniVision OV5647, Sony IMX219 and Sony
IMX477, no security device is required on Compute Module devices to use these camera sensors.

Raspberry Pi Compute Module 4

CM4T

CAM_GPIO



CM4_3.3V signalling,Typically used to Shutdown the camera to reduce power

Raspberry Pi Compute Module 4

Title *			*Q-Wave Systems Co.,Ltd* *65/2 Moo 1 Beung* *Sriracha Chonburi* *Thailand*
Size: A4	Number:*	Revision:*	
Date: 1/15/2021	Time: 4:53:37 PM	Sheet * of *	
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\CSI.SchDoc			

Q-WAVE SYSTEMS

CM4F

DSI0,DSI1

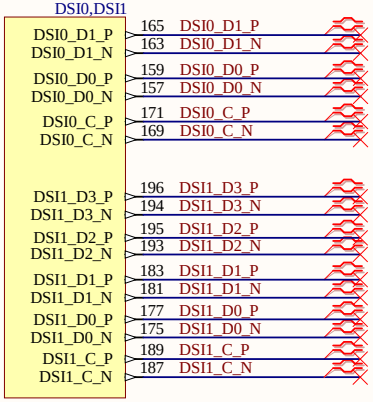

The CM4 supports two display ports; DISP0 (2 lanes) and DISP1 (4 lanes). Each lane supports a maximum of data rate per lane of 1Gbit/s.

Raspberry Pi Compute Module 4

Title *			*Q-Wave Systems Co.,Ltd* *65/2 Moo 1 Beung* *Sriracha Chonburi* *Thailand*
Size: A4	Number:*	Revision:*	
Date: 1/15/2021 Time: 4:53:37 PM	Sheet * of *		
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\DSI.SchDoc			

Q-WAVE SYSTEMS

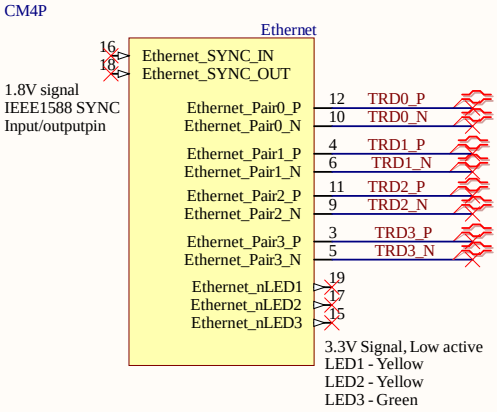

Title *			*Q-Wave Systems Co.,Ltd* *65/2 Moo 1 Beung* *Sriracha Chonburi* *Thailand*
Size: A4	Number:*	Revision:*	
Date: 1/15/2021 Time: 4:53:37 PM	Sheet * of *		
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\Ethernet.SchDoc			

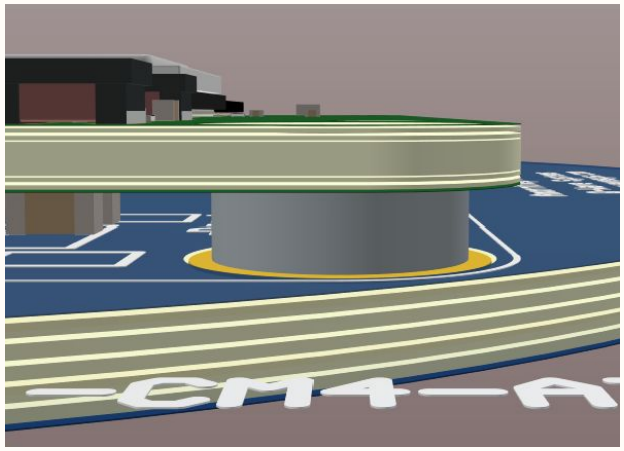

Wurth Elektronik 9774015151R

https://www.we-online.com/catalog/datasheet/9774015151.pdf



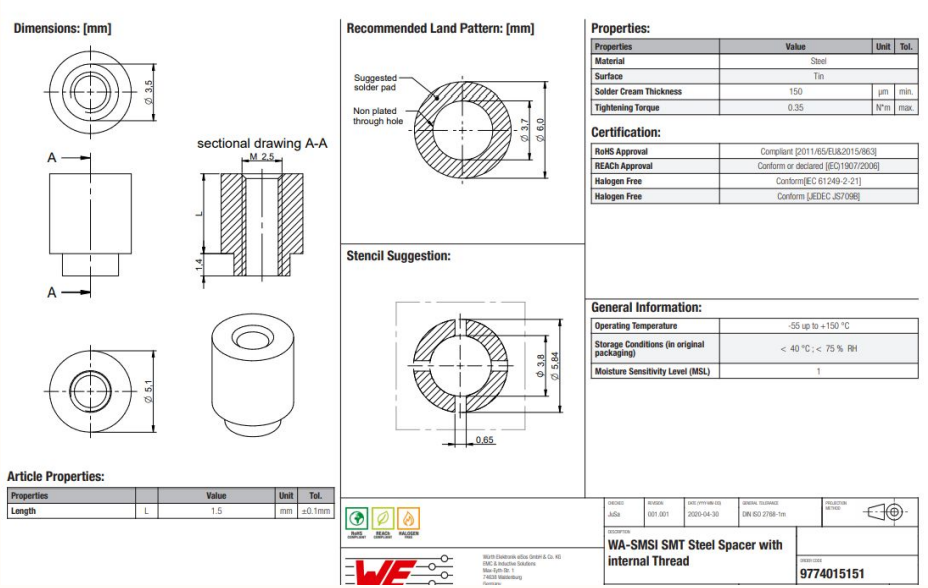

GPIO_VREF Must be connected to CM4_3.3V (pins 84 and 86) for 3.3V GPIO or

CM4_1.8V (pins 88 and 90) for 1.8V GPIO. This pin cannot be floating or connected to ground

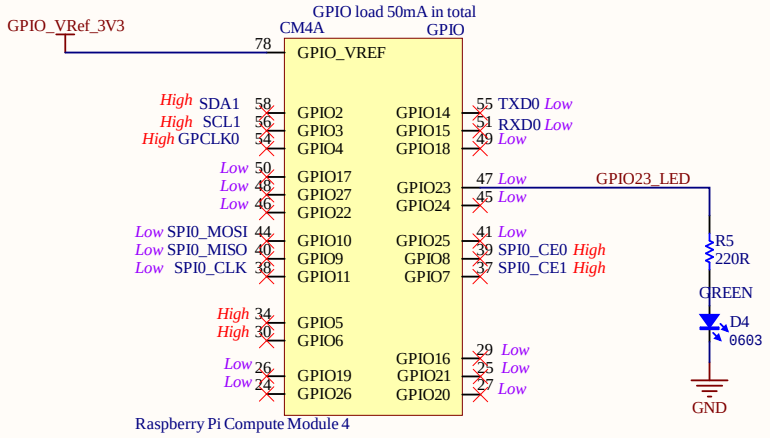

Title *			Q-Wave Systems Co.,Ltd 65/2 Moo 1 Beung Sriracha Chonburi Thailand
Size: A4	Number:*	Revision:*	
Date: 1/15/2021	Time: 4:53:37 PM	Sheet * of *	
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\GPIO.SchDoc			

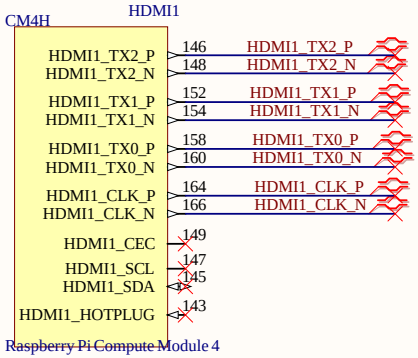

HDMI1_HOTPLUG
Input HDMI1 Hotplug Internally pulled down with a 100K. 5V tolerant.

HDMI1_SDA,SCL
Bidir HDMI1 SDA Internally pulled up with a 1.8K. 5V tolerant

CEC is also supported, an internal 27K pullup resistor is included in the CM4.

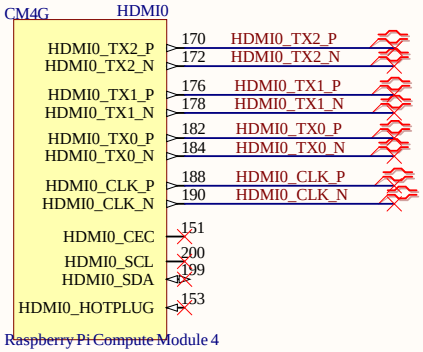

HDMI0_HOTPLUG
Input HDMI1 Hotplug Internally pulled down with a 100K. 5V tolerant.

HDMI0_SDA,SCL
Bidir HDMI1 SDA Internally pulled up with a 1.8K. 5V tolerant

HDMI signals should be routed as 100Ω differential pairs, each signal within a pair should ideally be matched to better

than 0.15mm. Pairs don't typically need any extra matching as they only have to be matched to 25mm.

CEC is also supported, an internal 27K pullup resistor is included in the CM4.

Title *			*Q-Wave Systems Co.,Ltd* *65/2 Moo 1 Beung* *Sriracha Chonburi* *Thailand*
Size: A4	Number:*	Revision:*	
Date: 1/15/2021	Time: 4:53:37 PM	Sheet * of *	
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\HDMI2.0.SchDoc			

Q-WAVE SYSTEMS

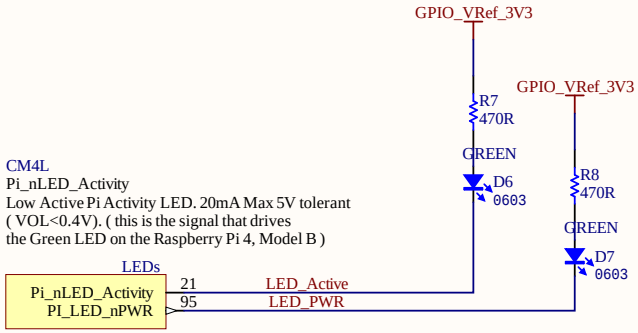

PI_LED_nPWR
Low active Output to drive Power On LED. This
signal needs to be buffered.

Raspberry Pi Compute Module 4

Title *			*Q-Wave Systems Co.,Ltd* *65/2 Moo 1 Beung* *Sriracha Chonburi* *Thailand*
Size: A4	Number:*	Revision:*	
Date: 1/15/2021 Time: 4:53:37 PM	Sheet * of *		
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\LEDs.SchDoc			

Q-WAVE SYSTEMS

CM4I

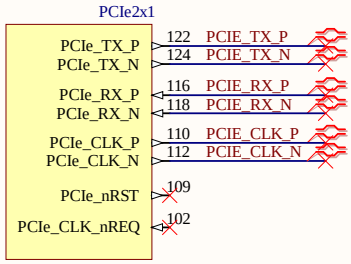

The CM4 has an internal PCIe 2.0 x1 host controller

Raspberry Pi Compute Module 4

Title *			*Q-Wave Systems Co.,Ltd* *65/2 Moo 1 Beung* *Sriracha Chonburi* *Thailand*
Size: A4	Number:*	Revision:*	
Date: 1/15/2021 Time: 4:53:37 PM	Sheet * of *		
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\PCIe.SchDoc			

Q-WAVE SYSTEMS

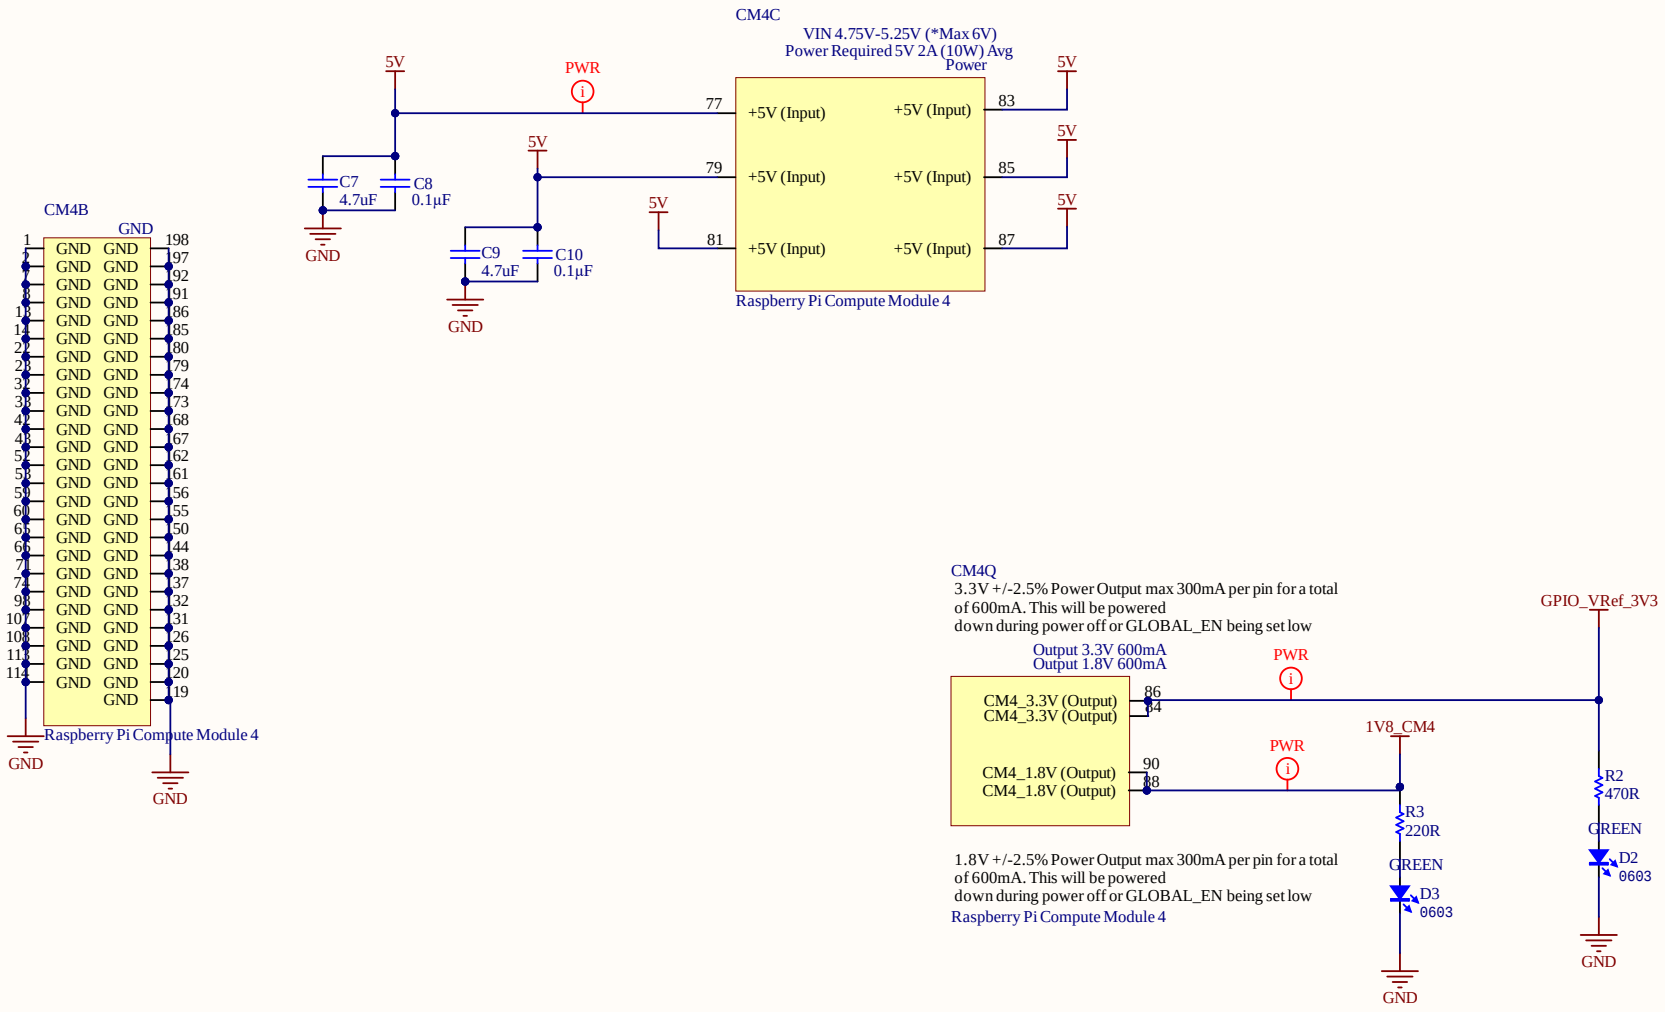

Title *			Q-Wave Systems Co.,Ltd 65/2 Moo 1 Beung Sriracha Chonburi Thailand
Size: A4	Number:*	Revision:*	
Date: 1/15/2021	Time: 4:53:37 PM	Sheet * of *	
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\Power.SchDoc			

CM4J

When SD_VDD_override is high, this signal is used to force 1.8v signalling on the SDIO interface. Typically this is used with eMMC memory

SD Card (Lite Version Only)



The SD_PWR_ON signal is used to enable an external power switch to turn on power to the SDCARD

Raspberry Pi Compute Module 4

Title *			Q-Wave Systems Co.,Ltd 65/2 Moo 1 Beung Sriracha Chonburi Thailand
Size: A4	Number:*	Revision:*	
Date: 1/15/2021 Time: 4:53:37 PM	Sheet * of *		
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\SD Card.SchDoc			

Right Pin 101-200
HIgh Speed

PCIe
CSI
DSI
HDMI
USB

Right Pin 1-100
Low Speed

Power
Ethernet
SD Card
GPIO

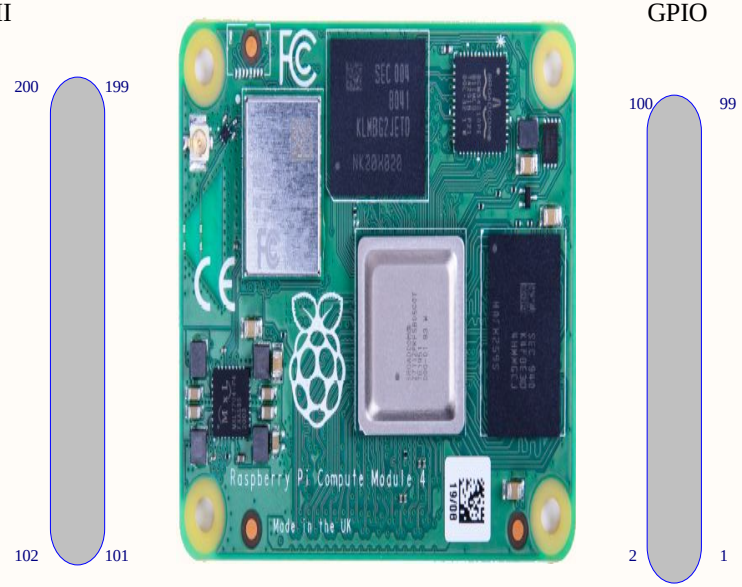

Logo1

Breadboard 350pin

QWAVE Logo

The CM4 is a compact 40 × 55mm module. The Module is 4.7mm deep, but when connected the height will be 5.078 or
6.578 mm depending on the stacking height chosen.
1. 4 × M2.5 Mounting holes (inset 3.5mm from module edge)
2. PCB thickness 1.2mm ± 10%
3. BCM2711 SOC height including solder balls 2.378 ± 0.11mm
4. Stacking height either:
a. 1.5mm with mating connector (clearance under CM4 0mm) : DF40C-100DS-0.4v
b. 3.0mm with mating connector (clearance under CM4 1.5mm): DF40HC(3.0)-100DS-0.4v

Title *			Q-Wave Systems Co.,Ltd 65/2 Moo 1 Beung Sriracha Chonburi Thailand
Size: A4	Number:*	Revision:*	
Date: 1/15/2021	Time: 4:53:37 PM	Sheet * of *	
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\Top_Level_Block Diagram.SchDoc			

CM4U

VDAC TV Out



Video DAC output (TV OUT)
Can be use following pins for PWM signal
PWM0_0 = GPIO12
PWM0_1 =GPIO13

Raspberry Pi Compute Module 4

Title *			*Q-Wave Systems Co.,Ltd* *65/2 Moo 1 Beung* *Sriracha Chonburi* *Thailand*
Size: A4	Number:*	Revision:*	
Date: 1/15/2021 Time: 4:53:37 PM	Sheet * of *		
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\TV DAC.SchDoc			

Q-WAVE SYSTEMS

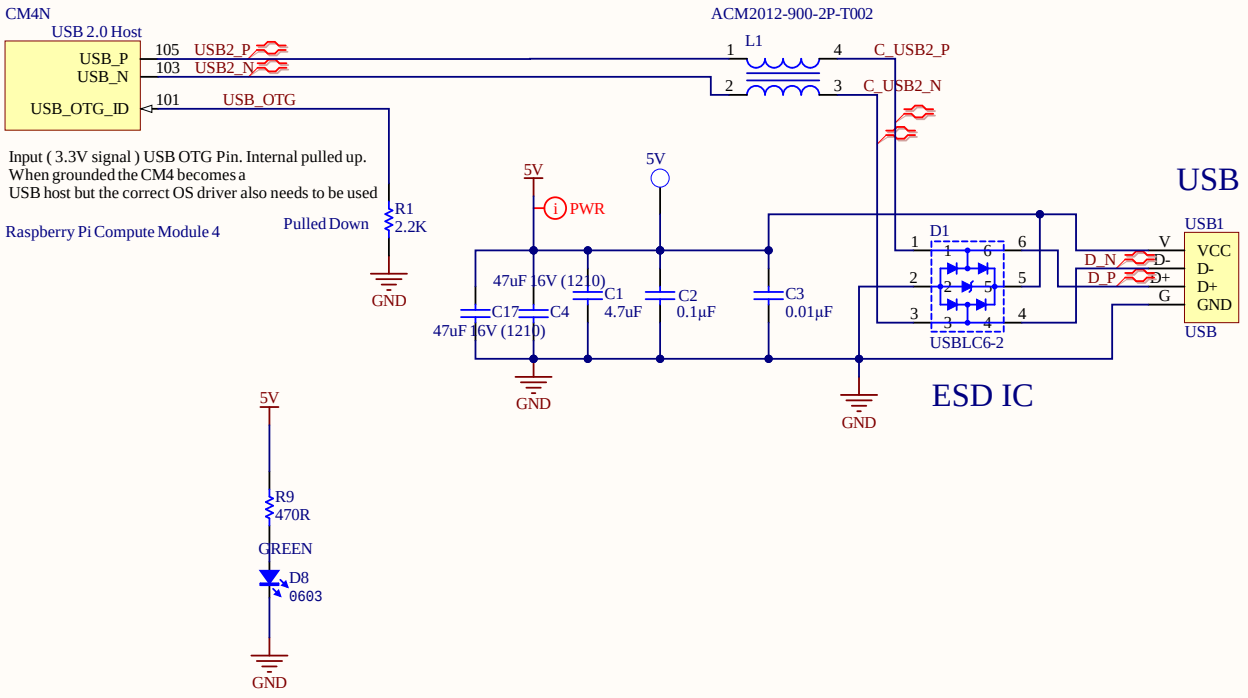

Title *			*Q-Wave Systems Co.,Ltd* *65/2 Moo 1 Beung* *Sriracha Chonburi* *Thailand*
Size: A4	Number:*	Revision:*	
Date: 1/15/2021 Time: 4:53:37 PM	Sheet * of *		
File: G:\My Drive_HW_Product\QWA56-CatsEYE-Flasher\USB.SchDoc			