

■ INTRODUCTION

The CE100X/CE101X is an integrated hall-effect sensor designed specifically to meet the requirements of low-power devices as an On/Off switch in Cellular Flip-Phones, which battery operating voltages of 2.3V-5.5V.

An onboard clock scheme is used to reduce the average operating current of IC CE100X/CE101X can be switched on with either the North or South pole of a magnet.

■ FEATURES

- Omni-polar detection
- High sensitivity and high stability of the magnetic switching points
- CMOS output or NMOS Open drain output (CE100X)
- Transmission gate output: unidirectional conduction from OUTP to OUTN(CE1014)
- Micro power operation
- Middle speed operation (CE1014)
- Middle speed operation (CE1004)
- High speed operation (CE1005)

■ APPLICATIONS

- Mobile Phones (Flip Type, Slide Type etc.)
- Laptop PCs, Notebook PCs
- Digital Still And Video, Cameras
- Playthings, Portable games
- Electronic Dictionaries
- Home Appliances
- 2.3V -5.5V battery operation

■ ORDER INFORMATION

Device No.	Feature Description	Package	Packaging
CE1003NM/CE1003NMR	Tp=50ms, NMOS Output	SOT23-3/SOT23-5	3000 parts per reel
CE1003CM/CE1003CMR	Tp=50ms, CMOS Output	SOT23-3/SOT23-5	3000 parts per reel
CE1004NM/CE1004NMR	Tp=7ms, NMOS Output	SOT23-3/SOT23-5	3000 parts per reel
CE1004CM/CE1004CMR	Tp=7ms, CMOS Output	SOT23-3/SOT23-5	3000 parts per reel
CE1005NM/CE1005NMR	No Intermittent Operation, NMOS Output	SOT23-3/SOT23-5	3000 parts per reel
CE1005CM/CE1005CMR	No Intermittent Operation, CMOS Output	SOT23-3/SOT23-5	3000 parts per reel
CE1014TM	Tp=7ms, Transmission Gate Output	SOT23-5	3000 parts per reel

■ TYPICAL APPLICATION CIRCUIT

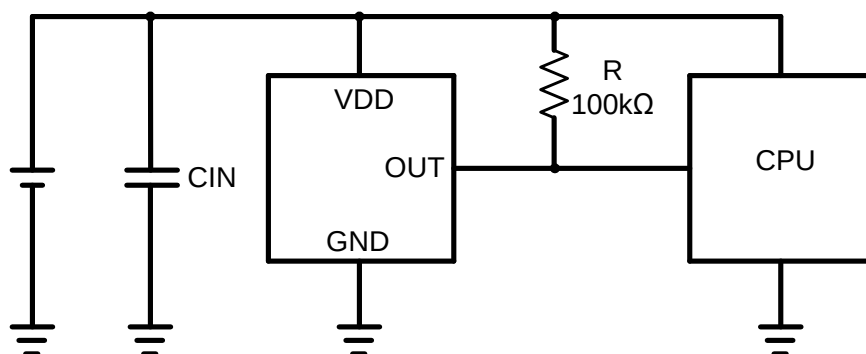


Figure 1. Standard Application Circuit (CE100XN)



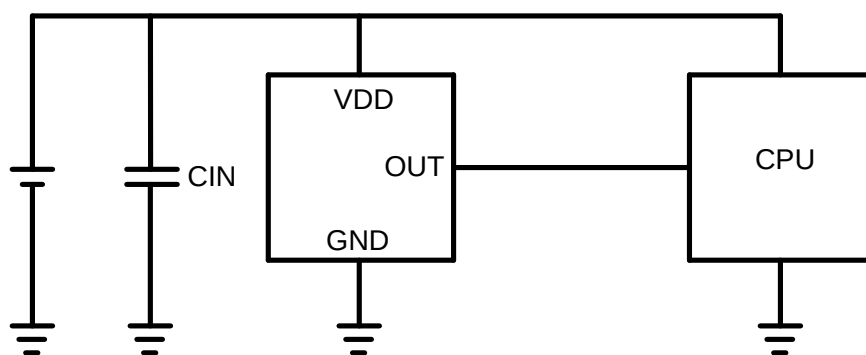


Figure 2. Standard Application Circuit (CE100XC)


■ PIN CONFIGURATION

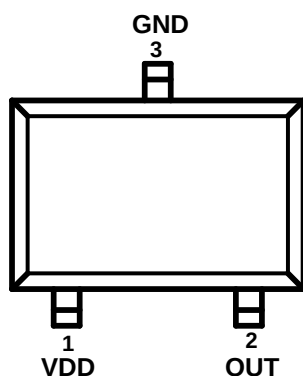

SOT23-3 (Top View)

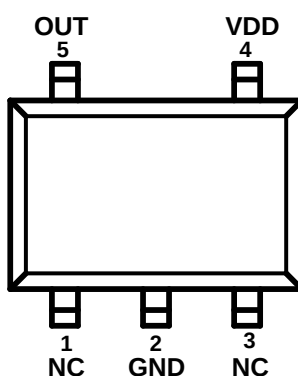

SOT23-5 (Top View)

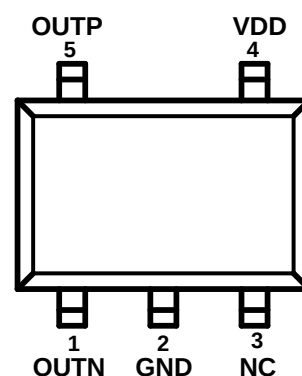

SOT23-5 (Top View)

Table 1. CE100X Pin Description

PIN			TYPE ⁽¹⁾	DESCRIPTION AND REQUIRED COMPONENTS
M	MR	NAME		
SOT23-3	SOT23-5			
1	4	VDD	P	Supply Voltage Input.
2	5	OUT	I/O	NMOS Open Drain Output or CMOS Output.
3	2	GND	P	Ground Terminal.
X	1/3	NC	I/O	Not Connected.

Table 2. CE101X Pin Description

PIN		TYPE ⁽¹⁾	DESCRIPTION AND REQUIRED COMPONENTS
M	NAME		
SOT23-5			
1	OUTN	I/O	Transmission Gate Output Negative Terminal.
2	GND	P	Ground Terminal.
3	NC	I/O	Not Connected.
4	VDD	P	Supply Voltage Input.
5	OUTP	I/O	Transmission Gate Output Positive Terminal.

(1) I = input; O = output; P = power

■ ABSOLUTE MAXIMUM RATINGS⁽¹⁾

(unless otherwise specified , $T_A=25^{\circ}\text{C}$)

PARAMETER		SYMBOL	RATINGS	UNITS
Input Supply Voltage ⁽²⁾		V_{DD}	-0.3~7	V
OUT Pin Voltage ⁽²⁾		V_{OUT}	-0.3~7	
Supply Pin Current		I_{DD}	-1~2.5	mA
OUT Pin Current		I_{OUT}	-1~2.5	μA
Power dissipation	SOT23-3	P_D	400	mW
	SOT23-5	P_D	400	mW
Operating Ambient Temperature Range ⁽³⁾		T_A	-40~85	$^{\circ}\text{C}$
Junction Temperature		T_J	-40~125	$^{\circ}\text{C}$
Storage Temperature		T_{stg}	-65~125	$^{\circ}\text{C}$
Lead Temperature (Soldering, 10s)		T_{solder}	260	$^{\circ}\text{C}$
ESD rating ⁽⁴⁾		HBM JESD22-A114A	4000	V
		MM JESD22-A115A	200	V

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltages are with respect to network ground terminal.

(3) The CE100X-CE101X are guaranteed to meet performance specifications from 0°C to 70°C . Specifications over the -40°C to 85°C operating temperature range are assured by design, characterization and correlation with statistical process controls.

(4) ESD testing is performed according to the respective JESD22 JEDEC standard.

The human body model is a 100 pF capacitor discharged through a 1.5k Ω resistor into each pin. The machine model is a 200pF capacitor discharged directly into each pin.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN	MAX	UNITS
Input voltage range	V_{DD}	2.3	5.5	V
Output Pin voltage range	V_{OUT}	-0.3	5.5	V
Operating junction temperature range	T_J	0	70	$^{\circ}\text{C}$

■ ELECTRICAL CHARACTERISTICS

(V_{DD}=3V and T_A=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Average Supply Current	I _{DDAVG}	CE1003		6	15	μA
		CE1004/CE1014		30	70	μA
		CE1005		3	7	mA
Average Supply Current During Operating Time	V _{DDEN} ⁽¹⁾	CE1003/CE1004/CE1014		5		mA
		CE1005		8		mA
Supply Current During Standby Time	V _{DDDIS} ⁽¹⁾			3	8	μA
Output High Voltage	V _{OH}	I _{OUT} =-1.0mA	V _{DD} -0.4			V
Output Low Voltage	V _{OL}	I _{OUT} =1.0mA			0.4	V
Output Leakage Current	I _{QLEAK}				1	μA
Period	T _P ⁽²⁾	CE1003		50	100	ms
		CE1004/CE1014		7	10	ms
Operating Time	t _{EN}			50		μS

(1) Specified by design, not production tested.

(2) For CE1005, not intermittent operation.

■ MAGNETIC CHARACTERISTICS

(V_{DD}=3V and T_A=25°C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS
Operate Point	B _{OPS}		3.7	5.0	mT
	B _{OPN}	-5.0	-3.7		mT
Release Point	B _{RPS}	1.3	2.9		mT
	B _{RPN}		-2.9	-1.3	mT
Hysteresis Point	B _{HYS}		1.5		mT

■ BLOCK DIAGRAM

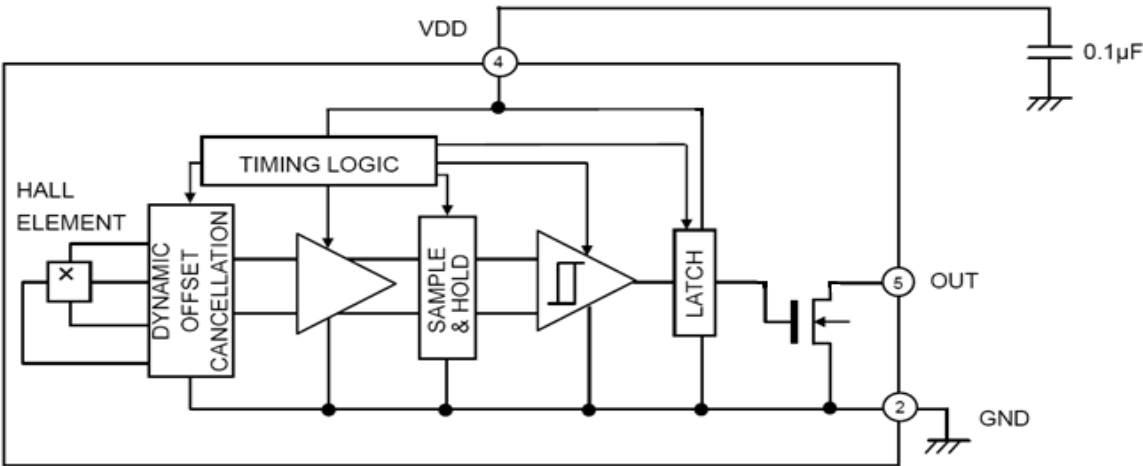


Figure 3. CE100XN Functional Block Diagram

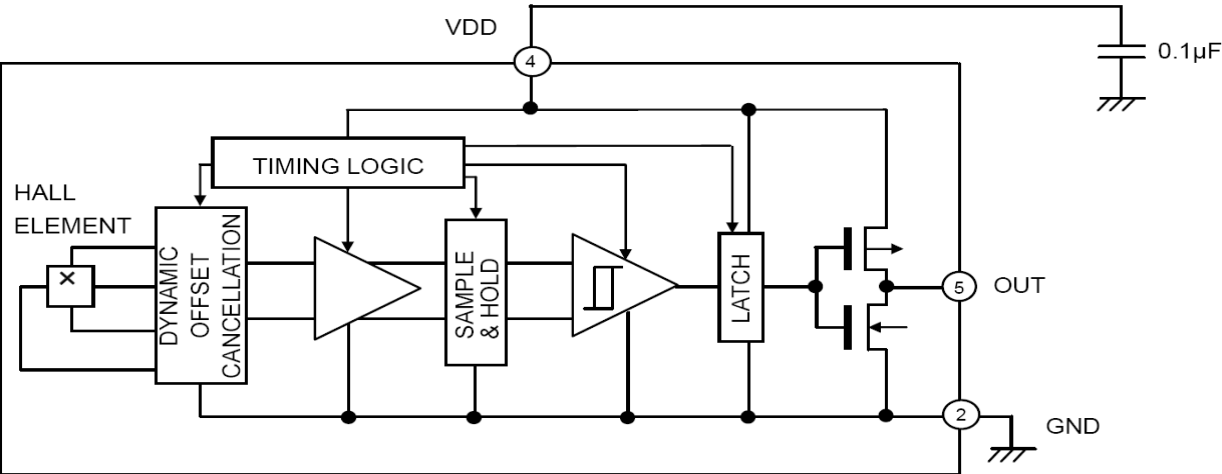


Figure 4. CE100XC Functional Block Diagram

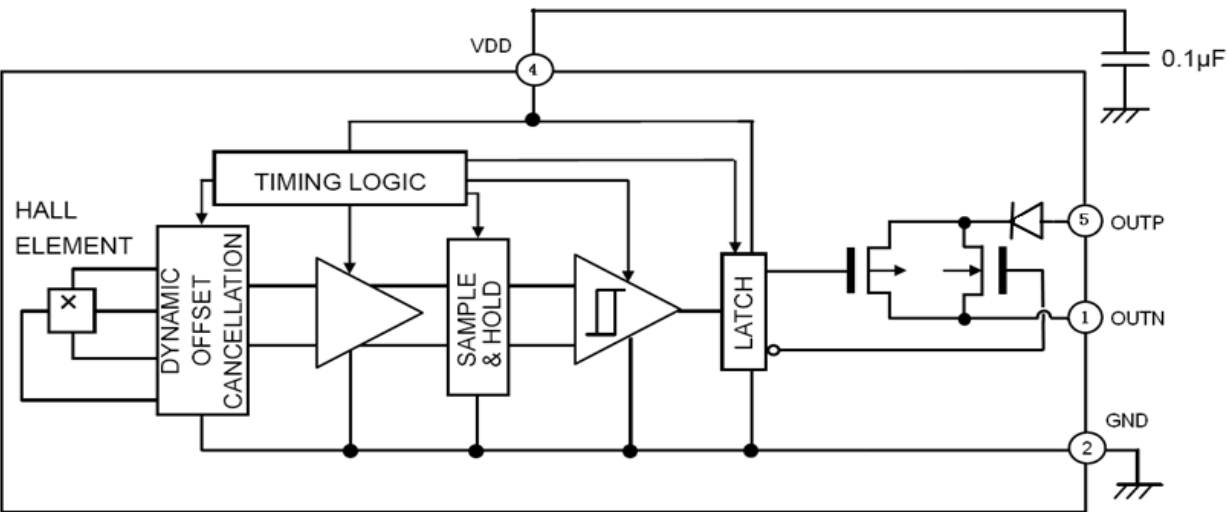


Figure 5. CE1014 Functional Block Diagram

■ FUNCTIONAL DESCRIPTION

Micropower Operation

The bipolar detection Hall IC adopts an intermittent operation method to save energy (shown in the Figure 4). At startup, the Hall elements, amp, comparator and other detection circuits power ON and magnetic detection begins. During standby, the detection circuits power OFF, thereby reducing current consumption. The detection results are held while standby is active, and then output.

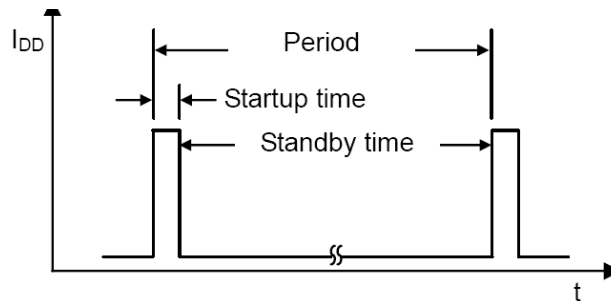


Figure 4. Intermittent Operation Method

Offset Cancellation

The Hall elements form an equivalent Wheatstone (resistor) bridge circuit. Offset voltage may be generated by a differential in this bridge resistance, or can arise from changes in resistance due to package or bonding stress. A dynamic offset cancellation circuit is employed to cancel this offset voltage. When Hall elements are connected as shown in Figure 5 and a magnetic field is applied perpendicular to the Hall elements, voltage is generated at the mid-point terminal of the bridge. This is known as Hall voltage.

Dynamic cancellation switches the wiring to redirect the current flow to a 90° angle from its original path, and thereby cancels the Hall voltage. The magnetic signal is maintained in the sample/hold circuit during the offset cancellation process and then released.

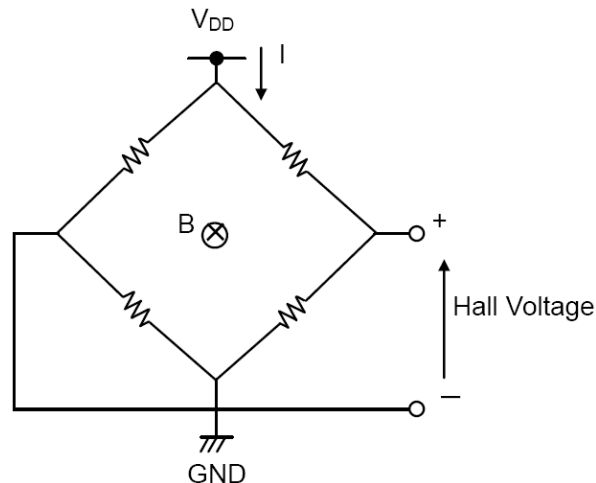


Figure 5. Equivalent Wheatstone Bridge Circuit

Magnetic Field Detection Mechanism

The Hall IC cannot detect magnetic fields that run horizontal to the package top layer. Be certain to configure the Hall IC so that the magnetic field is perpendicular to the top layer, as shown in Figure 6. The bipolar detection Hall IC detects magnetic fields running perpendicular to the top surface of the package. There is an inverse relationship between magnetic flux density and the distance separating the

magnet and the Hall IC: when distance decrease magnetic density falls. When it drops below the operate point (Brp), output goes HIGH. When the magnet gets closer to the IC and magnetic density rises, to the operate point (Bop), the output switches LOW. In LOW output mode, the distance from the magnet to the IC decrease again until the magnetic density falls to a point just below Bop, and output returns HIGH. (This point, where magnetic flux density restores HIGH output, is known as the release point, Brp.) This detection and adjustment mechanism is designed to prevent noise, oscillation and other erratic system operation.

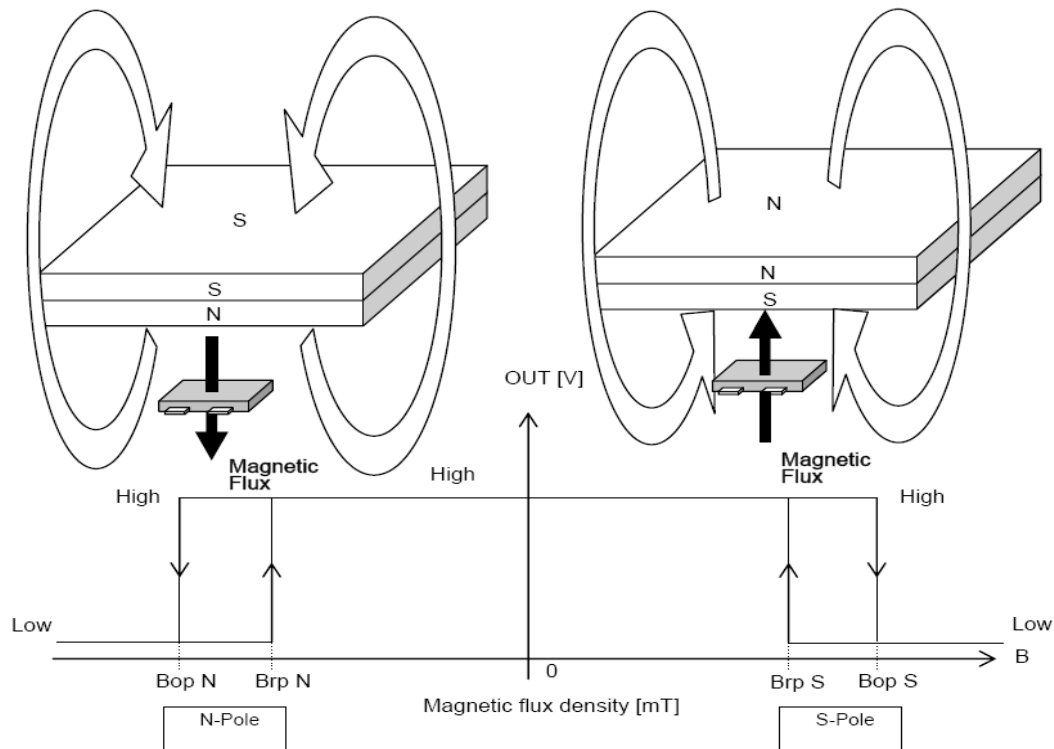


Figure 6. Operate Magnetic Field

Intermittent Operation at Power ON

The bipolar detection Hall IC adopts an intermittent operation method in detecting the magnetic field during startup, as shown in Figure 7. It outputs to the appropriate terminal based on the detection result and maintains the output condition during the standby period. The time from power ON until the end of the initial startup period is an indefinite interval, but it cannot exceed the maximum period, 100ms. To accommodate the system design, the Hall IC output read should be programmed within 100ms of power ON, but after the time allowed for the period ambient temperature and supply voltage.

※CE1005 don't adopts an intermittent operation method.

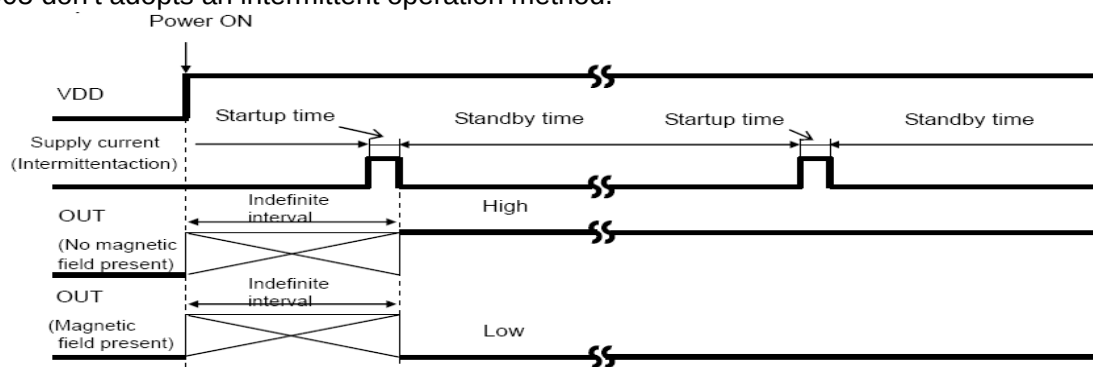


Figure 7. Detail Intermittent Operation Method

■ APPLICATION INFORMATION

Magnet Selection

Of the two representative varieties of permanent magnet, neodymium generally offers greater magnetic power per volume than ferrite, thereby enabling the highest degree of miniaturization. Thus, neodymium is best suited for small equipment applications. Figure 8 shows the relation between the size (volume) of a neodymium magnet and magnetic flux density. The graph plots the correlation between the distance (L) from three versions of a 4mm X 4mm cross-section neodymium magnet (1mm, 2mm, and 3mm thick) and magnetic flux density. Figure 9 shows Hall IC detection distance – a good guide for determining the proper size and detection distance of the magnet. Based on the operating point max 5.0 mT, the minimum detection distance for the 1mm, 2mm and 3mm magnets would be 7.6mm, 9.22mm, and 10.4mm, respectively. To increase the magnet's detection distance, either increase its thickness or sectional area.

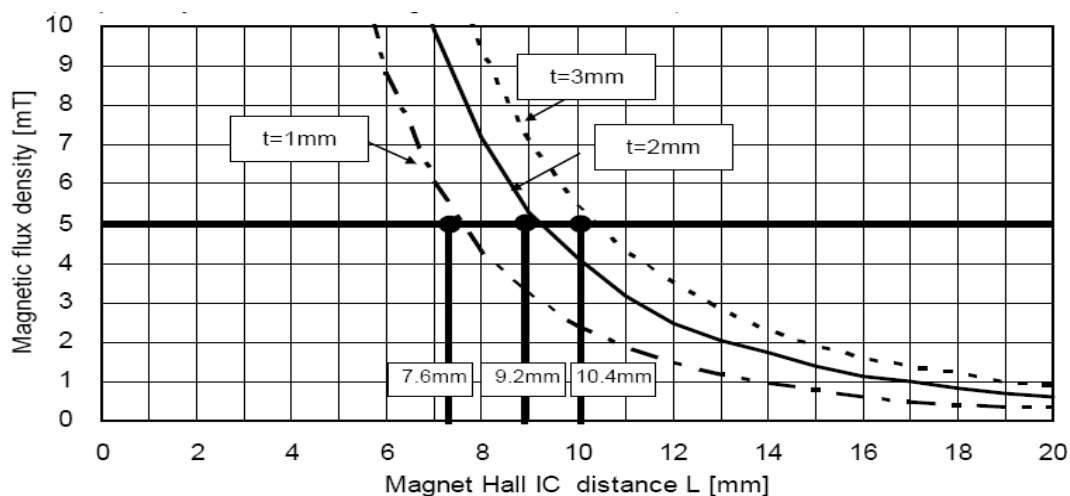


Figure 8. Magnet Hall IC Distance

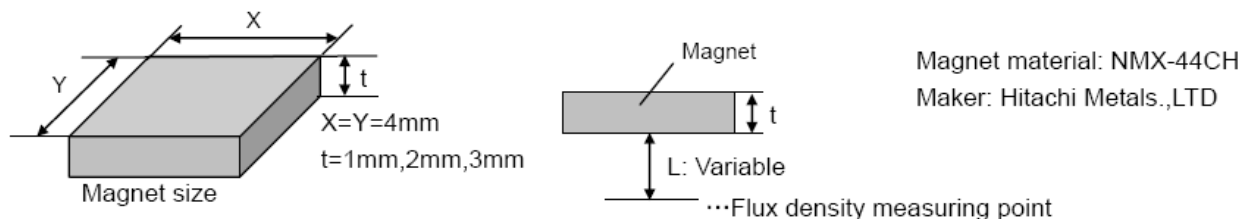


Figure 9. Magnet Dimensions and Flux Density Measuring Point

NOTES FOR USE

- 1) Positioning components in proximity to the Hall IC and magnet
Positioning magnetic components in close proximity to the Hall IC or magnet may alter the magnetic field, and therefore the magnetic detection operation. Thus, placing magnetic components near the Hall IC and magnet should be avoided in the design if possible. However, where there is no alternative to employing such a design, be sure to thoroughly test and evaluate performance with the magnetic component(s) in place to verify normal operation before implementing the design.
- 2) Slide-by position sensing
Figure 10 depicts the slide-by configuration employed for position sensing. Note that when the gap (d) between the magnet and the Hall IC is narrowed, the reverse magnetic field generated by the magnet can cause the IC to malfunction. As seen in Figure 10, the magnetic field runs in opposite directions at

Point A and Point B. Since the bipolar detection Hall IC can detect the S-pole at Point A and the N-pole at Point B, it can wind up switching output ON as the magnet slides by in the process of position detection. Figure 10 plots magnetic flux density during the magnet slide-by. Although a reverse magnetic field was generated in the process, the magnetic flux density decreased compared with the center of the magnet. This demonstrates that slightly widening the gap (d) between the magnet and Hall IC reduces the reverse magnetic field and prevents malfunctions.


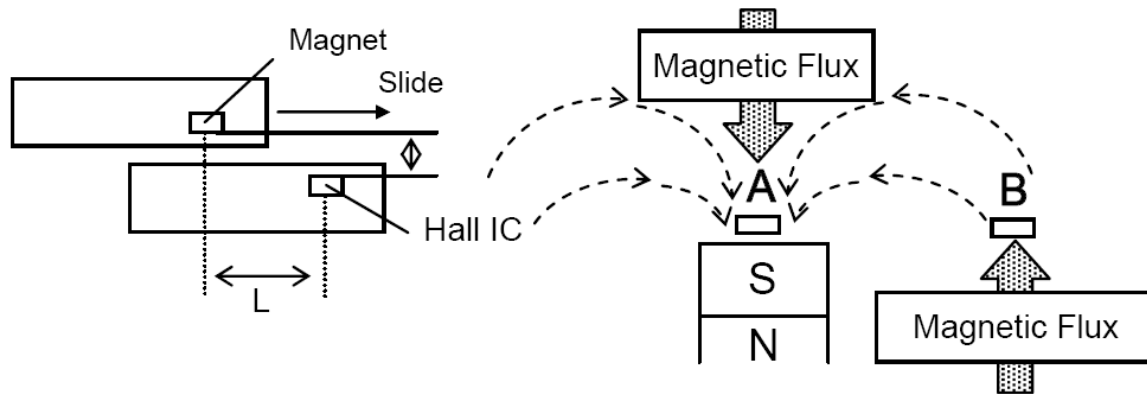


Figure 10. Slide-by Position Sensing


■ PACKAGING INFORMATION

● SOT23-5 Package Outline Dimensions

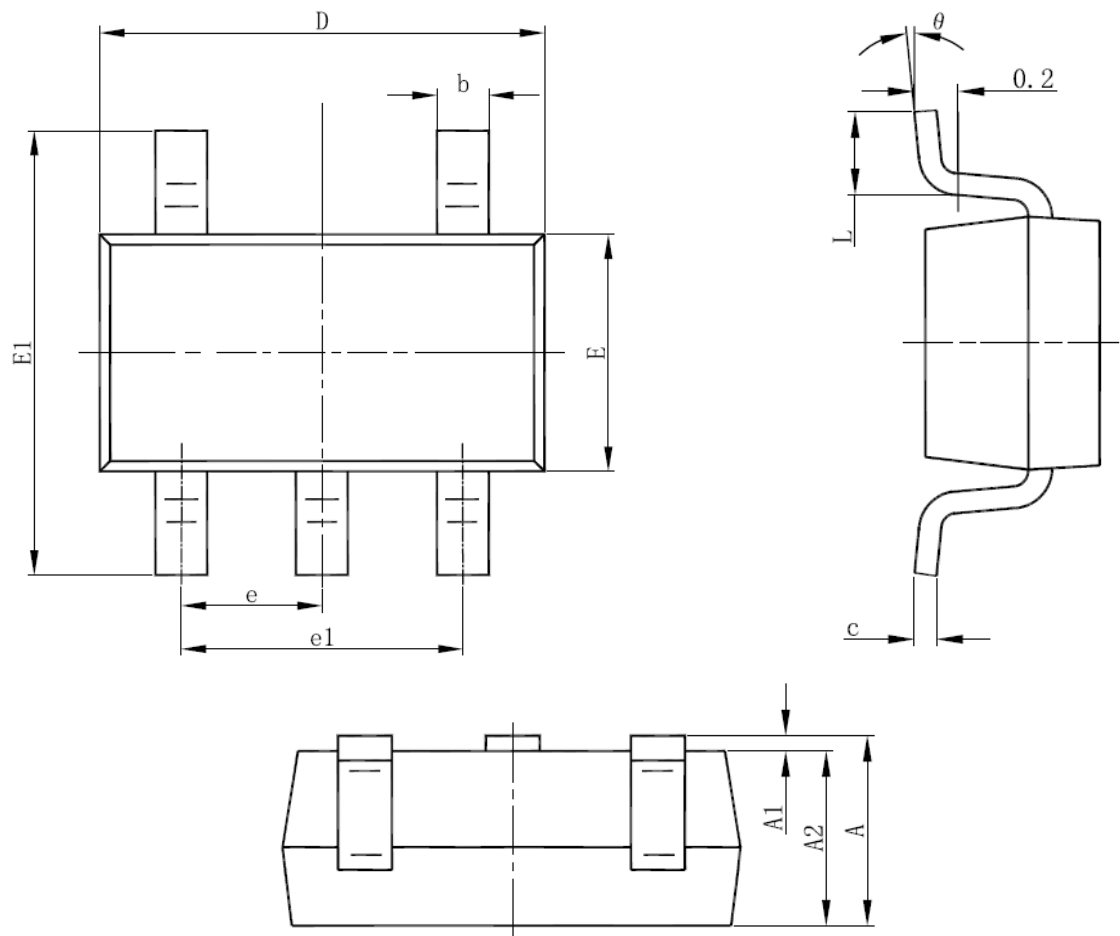

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

● SOT23-3 PACKAGE OUTLINE DIMENSIONS

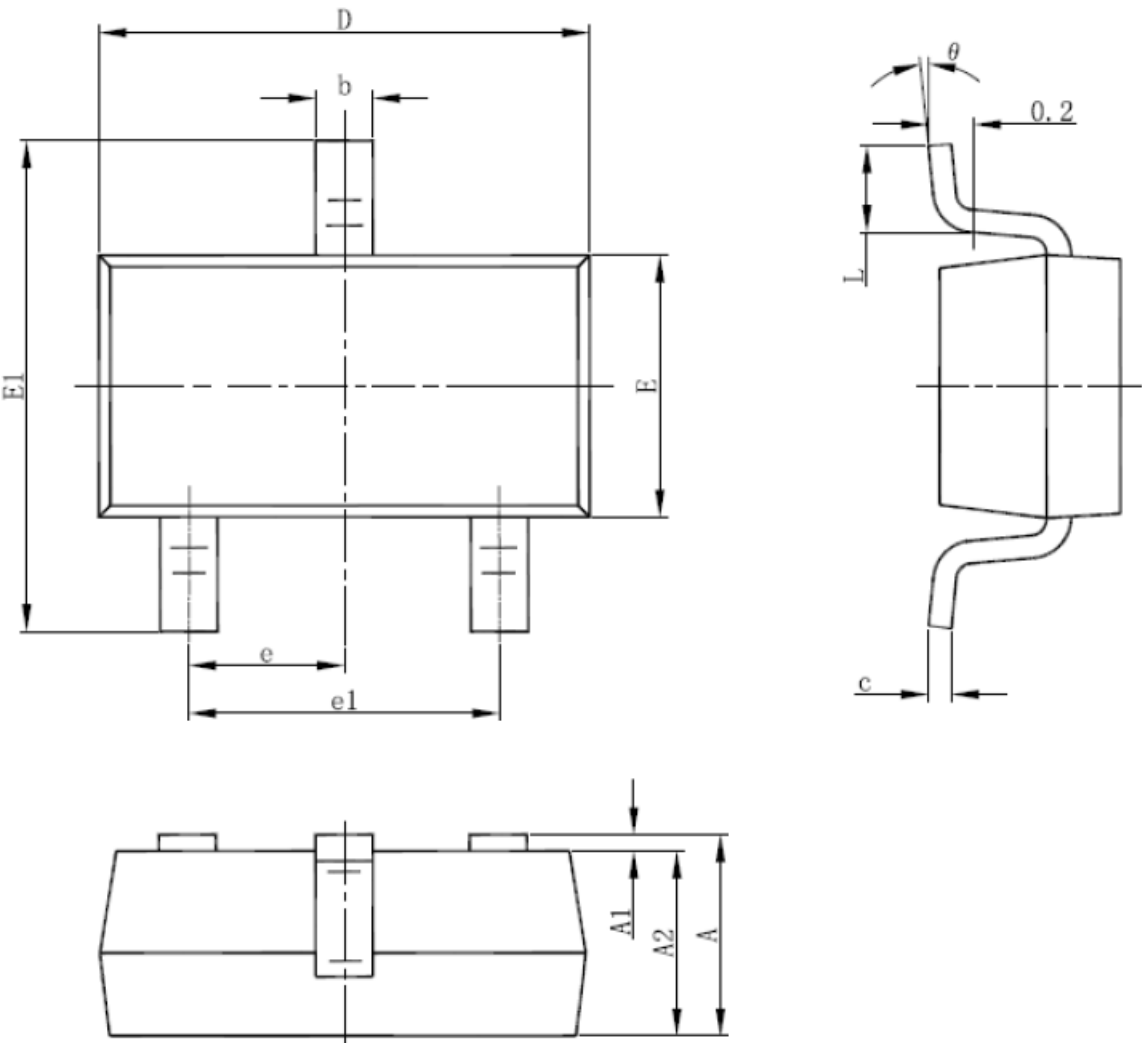

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

© Nanjing Chipower Electronics Inc.

Chipower cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Chipower product. No circuit patent license, copyrights or other intellectual property rights are implied. Chipower reserves the right to make changes to their products or specifications without notice. Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.