


# Maxwell's Silver Hammer: On the application of pulsed microwave acoustic resonant viral inactivation \*

Based primarily on exceptional work by

May 2020

Daniel Correia   
???????? York??????,

## Abstract

We extend this landmark work rather trivially by:

Aims: this is primarily bookkeeping.

Legend: ✓ = crude experiment, not nearly definitive, needs more work | ~ = crude experiment, not nearly definitive, needs more work | ✗ = definitely not.

- Establishing the time dependence of inactivation in surrogate bacteriophage | ✓
- Demonstrating a modulation scheme that decreases the inactivation threshold to below current safety levels in surrogate bacteriophage | ✓
- Demonstrating a prototype emitter in an "electromagnetic mask" form-factor, costing about \$5 in prototype quantities, which can reasonably be produced in 10 million-of quantities | ~
- Testing power thresholds in various conditions; biological fluids of various conductivities and pHs | ✗
- Synthesizing a coarse-grained molecular-dynamics simulation of the mechanism | ✗
- Using a virus-in-the-loop optimization with a centrifugal microfluidic system
- Discussing the biological basis for the safety of the device | ✓
- Showing that the deviation from the expected threshold could be explained by variance in the viron | ✓
- Taking 4 months to design a circuit with 2 transistors, thereby potentially leading to the maiming of hundreds of thousands of people and causing untold economic losses through negligence | ✓

It is perhaps notable that a completely free and open-source toolchain was used for the entire project.

---

\*I would be delighted to include any criticisms or comments anyone may have, both on substance and comprehensibility; preferably leave them on the GitHub issues page, or email [therobotist@gmail.com](mailto:therobotist@gmail.com), @0xDBFB7 on Twitter, or [#covid](https://irc.0xDBFB7.com:6667).

*autem*

This work was prepared by an undergraduate and has not been peer-reviewed. Additionally, the author has no prior experience with either biology or microwave design.

While our study is very simple, biological research is of such complexity that a tremendous amount of care must be taken before any conclusion can be drawn at all. It is not likely that we have taken sufficient care.

This is especially true with RF biophysics. The literature is littered with otherwise impeccably performed research which is both difficult to find fault in, and faulty.

This paper does not contribute to the state of the art at all, except perhaps in the obvious avenue of time-domain modulation; [Hung 2014] have already demonstrated a reflectarray, and the rest of our discussion is anything but novel.

Though the original research used Inf. A, our testing was only performed with a surrogate bacteriophage. All experiments must be repeated with SARS-NCov-2.

Additionally, other sterilization techniques may produce superior results with less faffing about and should be evaluated in the same context. For instance, data on far UV [Buonanno 2017] indicates safety.

Accurate microwave measurements are rife with parasitics and sensitivities. It has occurred before that otherwise striking resonances were detected, and further replication found them to be artifacts of the measurement equipment. [Foster 1987] even offers this disclaimer:

"To detect the DNA resonances with the probe technique requires correction for system errors that are potentially much larger than the effect to be studied and lead to resonance-like artifacts. This is true even with the more precise instrumentation used in this study. Such data are easily misinterpreted".

The direct inactivation plaque and PCR data in the referenced papers are somewhat convincing corroboration that this effect is not an artifact; but hundreds of convincing and wrong papers exist in the literature.

Our data is crude and imprecise, our equipment hastily constructed, and should not be considered validation of this effect even existing.

Even if this effect exists and is as effective as it appears, it could still be impractical to apply for any number of reasons.

Please consider all claims with appropriate skepticism.

**To-do list** We see the following steps that must be undertaken before production can be started:

- Re-run the experiment with
- Verify
- Failure-tree to ensure that power levels can never go above specified values.
- Obtain special permission from the FCC?

[Frolich 1968] [Frolich 1980]  $\rightarrow$  ([Hung 2014] || [Yang 2015] || [Sun 2017])<sup>1</sup> - coincidentally have just the right size, shape, stiffness, and net charge distribution to form a weak (Q=2) spherical dipole resonance mode which couples well to the microwave spectrum at approximately 8 GHz.

More critically, [Yang 2015] (and, in parallel, [Hung 2014]) theoretically model and then experimentally validate in various strains of Influenza A that - due to this acoustic-resonance effect - the power density levels required to crack the lipid envelope are near the safety limits for continuous exposure to humans.<sup>2</sup>

They demonstrate this with both a plaque and PCR assay, finding good agreement with the theoretical model.<sup>3</sup>

Like pumping a swing, this effect allows an otherwise inconsequential field magnitude to store energy over a small number of cycles until the virus is destroyed.

## Ramifications

If this mechanism exists, it would seem to provide significant advantages over existing UV or cold-plasma sterilization.

If the extensions made in our paper are valid, this is a non-ionizing, non-thermal<sup>4</sup>, non-chemical technique, harmless for continuous exposure to tissue, which can sterilize air and surfaces alike, including skin, eyes, and

within hair; it evolves no ozone, can readily be generated with \$1 USD - scale devices, acts instantaneously, and - perhaps most critically - could be made to act **within infected tissues**.

The X-band is also minimally absorbed by air, allowing action in the far-field and scaling to square-kilometer areas with single installations.

*autem*

The previous paragraph may cut an impressive figure; but it hinges on all the rest of this paper being correct.

It cannot be overstated how unexpected and positively dubious this finding appears to be -at least, based on our limited research and experience to date.

For even the RF power limits set by standards organizations appear to be based on the observation that few significant resonance modes exist in biological tissues, and (as we shall see), this is grounded in solid *in vitro* (albeit more limited *in vivo*) evidence.

This may account for why this paper has been ignored.

The precise structure and charge of the virion appears to be a singular anomaly in this otherwise catagorical non-existence.

5  
6  
7

<sup>1</sup>We have not conducted unlike human cellular structures, as we shall see

<sup>2</sup>Sort of. See below and supplemental.

<sup>3</sup>As we will discuss, there are a few issues with the experimental technique.; sham, blinding, and dosimetry demanded by [Vjl.] are not mentioned.

<sup>4</sup>It may be useful to define 'non-thermal'; it caused us some confusion. Certainly the proteins of the virion locally absorb energy and increase in temperature. The key is that, when excited in this manner, the energies in the envelope are poorly modelled by a Maxwell-Boltzmann distribution; they are not given sufficient time to 'thermalize'. In contrast, with typical 2.4 GHz microwave exposure, sterilization can only occur by aggregate heating of the fluid and tissue.

<sup>5</sup>It should be noted that this *confined* acoustic resonance is subtly distinct from common-and-garden pipe-organ acoustic resonance; this is apparently not a strictly classical phenomenon. Besides standard Coulomb-like and Lennard-Jones-like interactions between constituent particles, if Fröhlich is to be believed at these nanoscopic scales there are also wave-function interactions among the particles of the virus which can shift storage to modes not otherwise expected.

We confess to not yet understanding this phenomenon; fortunately, while helpful, the details of how this mode appears are not critical to implementing this technique.

<sup>6</sup>[B]elow about 6 GHz, where EMFs penetrate deep into tissue (and thus require depth to be considered), it is useful to describe this in terms of specific energy absorption rate (SAR), which is the power absorbed per unit mass ( $W/kg$ ). Conversely, above 6 GHz, where EMFs are absorbed more superficially (making depth less relevant), it is useful to describe exposure in terms of the density of absorbed power over area  $W/m^2$ , which we refer to as absorbed power density [ICNIRP 2020]

<sup>7</sup>All values have been converted to  $W/m^2$  to avoid confusion.  $100 W/m^2 = 10 mW/cm^2 = 10 dBm/cm^2$ .

A poignant summary of the consensus is found in [IEEE C95.1-2005], Annex B, "Identification of levels of RF exposure responsible for adverse effects: summary of the literature".

Further examination of the RF literature reveals no reproducible low level (non-thermal) effect that would occur even under extreme environmental exposures. The scientific consensus is that there are no accepted theoretical mechanisms that would suggest the existence of such effects. This consensus further supports the analysis presented in this section, i.e., that harmful effects are and will be due to excessive absorption of energy, resulting in heating that can result in a detrimentally elevated temperature. The accepted mechanism is RF energy absorbed by the biological system through interaction with polar molecules (dielectric relaxation) or interactions with ions (ohmic loss) is rapidly dispersed to all modes of the system leading to an average energy rise or temperature elevation. Since publication of ANSI C95.1-1982 [B6], significant advances have been made in our knowledge of the biological effects of exposure to RF energy. This increased knowledge strengthens the basis for and confidence in the statement that the MPEs and BRs in this standard are protective against established adverse health effects with a large margin of safety.

Unfortunately, the buried lede is that the power levels shown by [Yang 2015] are about twice the continuous safety levels.

However, there is an obvious avenue of optimization. If the virus is destroyed in a few dozen nanoseconds via an electric field amplitude incidentally caused by an instantaneous power  $P$ , but tissue damage requires a temperature rise due to an energy deposition  $P dt$ , then we should minimize  $dt$ .

We thus turn the CW microwave signal into a series of effectively instantaneous pulses.

The safety standards of [IEEE] and [ICNIRP] account for such time-domain modulation by specifying both an average power limit over a 6 minute period, and a time-integrated energy deposition limit. All known non-thermal and thermal physiological effects, including changes in the permeability of membranes, direct nerve stimulation, etc, are accounted for by obeying those two limits.

To drive home this point, apparently the best-quality evidence available fulfills sham requirements [Vijayalaxmi 2006] provide in-vitro. They expose blood lymphocytes to pulse power in precisely the regime required in this work; 8.2 GHz, 8 ns duration and 50 khz repetition rate, a whopping pulse power density of  $250,000 \text{ W/m}^2$ <sup>8</sup> (2500x the time-averaged power density safety limit), average power density  $100 \text{ W/m}^2$  (the safety limit), for 2 hours, finding no change in any of the measured quantities.

Similarly, [Chemeris 2004] use 8.8 GHz, 180 ns pulse width, peak power 65,000 W, repetition rate 50 Hz, exposure duration 40 min, on frog etheyrocytes, and find genotoxicity only from the temperature rise.

So it appears that this is not merely rules-lawyering to exploit a loophole in the regulations; it is a physically-informed effect.

These papers (the best quality we are aware of) were extensively cherry-picked from the literature based on the results of a meta-analysis [Vj. 2019], listing the requirements for reliable in-vitro RF experiments.

To illustrate how sensitive this research is, [Chemeris 2004] mention:

The increase in DNA damage after exposure of cells to HPPP EMF shown in Table 2 was due to the temperature rise in the cell suspension by  $3.5 \pm 0.1^\circ\text{C}$ . This was confirmed in sham-exposure experiments and experiments with incubation of cells for 40 min under the corresponding temperature conditions."

There are a substantial number of papers in the literature which show positive effect sizes; these are listed in the bibliography.

The literature reviews conducted by standards organizations.

We are not aware of any past uses of these microwave en-masse. We do not have the

[114]

---

<sup>8</sup>computed from average power / duty cycle

## Talkin' 'bout the Variation

To re-cap, [Yang 2015] theoretically model the virus to determine the minimum electric field required to destroy it.

They assume that the virus is a simple damped harmonic oscillator, where the 'core' and 'shell' oscillate in opposition.

They determine the net charge experimentally from microwave absorption measurements.

Since [Yang] try to compute the *threshold*, they use a value of 400 pN for the breaking strength of the envelope, obtained from [Li 2011]. However,

"95

| Col1 | Col2 | Col2  | Col3 |
|------|------|-------|------|
| 1    | 6    | 87837 | 787  |
| 2    | 7    | 78    | 5415 |
| 3    | 545  | 778   | 7507 |
| 4    | 545  | 18744 | 7560 |
| 5    | 88   | 788   | 6344 |

Of course, this application is hardly much better than an N95 mask, except that it is non-disposable and provides protection for eyes and skin.

Vomit

[Vj] mention the importance of precise dosimetry. Even simple structures can produce hot-spots Yang et al use both a plastic cuvette, and a single drop of solution on a glass slide; in either case, a sharp change dielectric constant is present.

To the extreme, some papers have used

## Time dependence

The fact that the viral inactivation is non-thermal

Both [Yang 2015] and [Hung 2014] use an apparently arbitrary 15-minute exposure in their tests - a very reasonable decision, given the focus of their paper.

The effectiveness against airborne particles, and to minimize the power required in a dwelling phased-array beam, we must establish the required duration of exposure.

speculative hypothesizing {

In contrast to chemical inactivation, where the time dependence appears to be dominated by viscous fluid dynamic effects [Hirose 2017], or UV inactivation, where a certain quantized dose of photons must be absorbed, we expected RF to act instantaneously.

As a damped, driven oscillator, the ring-up time of the virus depends on the Q factor. Yang et al. state the Q of Inf. A as between 2 and 10, so at 8 GHz the steady-state amplitude should be reached in well under 100 nanoseconds.?????????FIXME

[] found a significant mechanical fatigue effect in phage capsids, where a small strain applied repetitively eventually causes a fracture. Such a mechanism could perhaps extend the exposure required to break the capsid or membrane. Other mechanisms could include some sort of lipid denaturation, requiring an absolute amount of energy absorption to break or twist bonds and modify properties before the envelope fractures.

}

## Safety

Because this is an ostensibly novel and niche mechanism, it may behoove us to briefly review the biological basis for the safety limits set by standards organizations.<sup>9</sup> a loophole in the guidelines

WHEN YOU SEE A CLAIM THAT A  
COMMON DRUG OR VITAMIN "KILLS  
CANCER CELLS IN A PETRI DISH,"

KEEP IN MIND:



SO DOES A HANDGUN.

There are also things.

For instance, it is reasonable to wonder why we might not see such resonances in bodily tissues. Approximately similar nanoscopic structures exist in humans, such as nuclear pores (120 nm) and the famous microtubules (10x50 nm).

While from which epidemiological data could be derived.<sup>10</sup>

What we find is a messy affair. Biology is hard.

There are some 20,000 papers on the topic of RF safety, with solid in vitro, in vivo and epidemiological evidence of safety in the 2.4 GHz and 5.8 GHz bands.

However, "There are limited experimental human data upon which to set limits on exposures above 6 GHz" [Chan 2019]. Only 2% of the above papers are on frequencies > 6 GHz [Vijayalaxmi 2018].

In addition, what data remains in this category is of varying quality.

As has been starkly demonstrated in the recent hydroxychloroquine contradictions [Gautret 2020] [Geleris 2020], biological research must be essentially perfect to have any meaning at all.

The IEEE standard which the flagship paper [Yang 2015] references [IEEE C95.1-2005] was recently overhauled [IEEE C95.1-2019] with new metrics.

[Vijayalaxmi 2018] is a remarkable meta-analysis of in vitro data. They synthesize a quality score, rating bind- edness, sham controls, dosimetry, and sample size. Qual-

ity was inversely, monotonically related to the effect size. An example of the subtle effects that can call into ques- tion superficially reasonable results are [

They additionally find a publication bias of incredible magnitude in the positive (harm) direction in this field, further degrading the usefulness of statistical analyses.

An example of a relevant study that they grade as "qual- ity 1" [Karaca 2011]. This study's conclusion is that How- ever, in figure 5, one can see that only 1 out of 11 genes tested had a statistically significant difference in expres- sion. Given the  $N=6$  cultures,

[Adair 2002] demonstrate theoretically that acoustic res- onances are, in general, highly unlikely in biological sol- vents, primarily focusing on DNA. All resonance modes are strongly overdamped by the surrounding solvent, and no amplitude amplification can take place.

This analysis would seem to disagree with the viral res- onance apparently conclusively demonstrated by [Yang 2015] - the PCR result seems especially inarguable. This could be explained by the large charge on the virus com- pared to the molecules analyzed in Adair. [Yang 2015] find a charge of order  $10^7e$ , whereas Adair analyzes a very different regime, "assume coupling to the field through single charges  $q = e$  at each end".

[Liu 2009] cite [Edwards, Swicord 1984], saying: "It was proposed that a hydration layer surrounding DNA molecules could lower the viscoelastic transition fre- quency, raise the quality factor of confined acoustic vi- brations, and result in a microwave resonant absorp- tion".

But [Adair 2002]'s [Foster 1987] seem to quite conclu- sively put the kibosh on that idea, demonstrating no res- onances in DNA with 20x higher precision than previous work, showing previous results to be an artifact of the measurement equipment.

The supplemental material to [Vijayalaxmi 2018] has a table of studies on this topic. High-quality research in- vitro concurs with.

### [Manikowska 1979]

9.4 GHz pulsed / in vivo, mouse,  $0.1 - 10\text{mW/m}^2$  over the whole body for 2 weeks.  $N=16$ .

This is a particularly concerning result, especially given their  $p < 0.001$ . [Servantie 1989] discusses the (admit- tedly circuitious) route by which birth defects could oc- cur.

<sup>9</sup>The idea of biological microwave resonances appears to have originated in [Frohlich 1968, 1980].

<sup>10</sup>The cloud service [scite.ai] was irreplaceable during this. It's like a mirror to an alternate universe where literature made sense.



Work by [Manikowska 1985] in the 2.4 GHz range has been contradicted [Beechey 1986], but the 9 GHz range does not appear to have been repeated.

---

More modern research [Juutilainen 2011], [Chemeris], [Vijayalaxmi 2006], does not tend to agree with these concerns. As cited by [ICNIRP 2020]’s excellent literature review, expose lymphocyte blood cells to 8 ns pulsed 8.2 GHz radiation for 2 hours at an average power of 10mW/cm<sup>2</sup>. They find no change in any of the parameters measured, including various chromosomal parameters. They further discuss previous results.

---

In the frequency range of interest, there seems to be good-quality in-vitro evidence using lymphocytes of lack of harm. We are not aware of any high-quality in vivo or epidemiological data from which useful conclusions can be drawn.

We must defer to health experts for interpretation of these data.

---

*Please contact the author if you are aware of other salient research, or have a different interpretation.*

## The Experiment

### **Centrifugal microfluidics**

The field of centrifugal microfluidics is accelerating.

Many CD microfluidics systems use standard CD molding techniques for the channels and machining techniques, using either acrylic or silicone. The turbidity sensor is most sensitive if the plastic is clear. Sterilization does not seem to be discussed.

Polypropylene is the ideal material, being almost indefinitely autoclavable. It is quite difficult to machine.

# Modes of application

## Personal 'electromagnetic mask'

Even with judicious use of phased-arrays, spatial power-combining, etc, each transistor can only reasonably maintain sterility in approx.  $0.1 \text{ m}^3$ .

We therefore demonstrate this form factor because, superficially, there are fewer people than there are places.

On the other hand, a personal device may present issues with participation and production volume.

## Direct treatments at the fundamental

Via [Hand 1982], the  $E_{mag} = 1/e$  penetration depth<sup>11</sup> is approximately 40 mm for 'dry' tissues and 5 mm for 'wet'.

SARS is found widely distributed throughout many of the most favoured organs [Ding 2004], shielded by an average of 4 cm of chest wall [Schroeder 2013]; so safe external treatment of the body is unlikely.

However, destruction of lung tissue appears to be significant in the lethality of SARS [Nicholls 2006].

A bronchoscopic technique may therefore be effective, very similarly to that demonstrated by [Yuan 2019]: in adults, the bronchi are less than 2 mm thick [Theriault 2018] and the lungs themselves are only on the order of 7 mm thick [Chekan 2016].

The main bronchus is about 8 mm in diameter, which is smaller than the patch antenna used here; a monopole (or multiple, phased monopoles) like is probably more suitable.

## Subharmonics

The 8 GHz wave need not be the fundamental. A modulated carrier wave with a more deeply penetrating wavelength which then locally interferes to produce the 8 GHz tone within the tissue could be useful.

The penetration depth shortens as frequency increases, until the so-called 'optical windows' in the absorp-

tion spectra of tissues, particularly in the near-IR range.

## More fanciful concepts

Many systems operate in these X-band frequency ranges; and precision

It is easy to produce megawatts of power at these frequency ranges using Klystrons. Assuming an appropriate antenna, a single 50MW SLAC XL-class klystron with a PRF of 180 Hz could sanitize almost a square kilometer every second.<sup>12</sup>

On the other hand, if this is conducted in outdoor free-space, sunlight

Existing marine, weather, and aviation radar systems often use the X-band; depending on the focusing power

**Sensing** Surprisingly, there is little discussion on microwave virus detection, with the notable exception of [Mehrotra 2019]. Such scholarly silence is usually an indicator that a technique is impossible for reasons so obvious they scarcely bear repeating.

However, [Oberoi 2012] find that - in controlled conditions - they can detect a single E. Coli bacterium in 50 uL of broth via a microwave cavity.

Of course, discriminating miniscule returns in free-space is not easy; but with precise knowledge of this resonance mode, it may become somewhat easier. Frequency-domain measurements can be made with incredible precision; and there are many parameters by which virions could be discriminated; ring-up time of the resonance, excitation non-linearity, etc.

It has been shown that virions can effect large-scale changes in the electric charges of their [].

Use of this technique will provide a selection bias towards immunity to electromagnetic fields, which could perhaps be effected by preferring extreme-sized mutants (shifting the resonance away from the applied field).

We do not have the biological knowledge to know if this is plausible; it simply seemed worth mentioning.

---

<sup>11</sup>"skin skin depth?"

<sup>12</sup>Giving 'aseptic field' new meaning.

## Microwave Musings

Toolchain:

- Failed oscillator feedback-loop optimization toolchain: QUCS 0.0.20 + python-qucs + scipy's 'basinhopper'
- Successful A slightly modified ngspice + ngspyce + pyEVTk
- gprMax for FDTD EM simulation
- KiCAD, wcalc, scikit-rf, ngspice

Microwave design has a reputation for being the purview of wizards. Modern RF software packages like HFSS, Microwave Office, Agilent's ADS, and Mathworks' RF toolbox, for which; component models

Luckily, this project falls perfectly within the subset of

microwave technologies that do not require a goatee. The vast majority of the behavior of most circuits can be accurately modelled with the very same SPICE tools as one would use at low frequencies. With judicious application of reference designs, it seems to be possible to design

Before about 2005, however, it seems to have been somewhat the norm to write a simple numerical code to solve the problem at hand based on underlying principles.

We are also aided by the fact that what took a \$150,000 computing cluster a single decade ago can now be done in a few minutes by a single budget GPU.

# Interference

## Mass production

Almost all components on the device can be replicated with fully vertically-integrated first-principles. Capacitors can be

If this 'electromagnetic mask' form is the ideal (not nearly),

The largest RFID plants can produce

a minimum of 5 GaAs or SiGe:C transistors will be required. Without SOI or, it does not appear that

As a lower bound, there are 1 million hospital beds in the U.S. [AHA 2018]; and as an upper bound obtaining global herd immunity would take 1.75 billion units.

It is difficult to determine the supply capacity for these semiconductor processes; information is not forthcoming from the manufacturers. Fermi estimates <sup>13</sup>

It is possible to use common Si-based devices at these frequencies, especially with second-harmonic techniques [Winch 1982]. However, obtaining the required gain and output power is not a trivial matter.

The techniques and equipment required to produce these devices are extremely complex; load-lock UHV,

Figures are not forthcoming,

Given the supply difficulties of comparatively simple materials such as Tyvek at pandemic scales, it is difficult to imagine that RF semiconductor production can be immediately re-tasked and scaled to this degree.

## Vacuum RF triode

Especially combined with an integrated titanium sorption pump,

One concern is the large filament heater power, which prevents the use of low-cost button cells for power. Use of cold-cathode field-emitter arrays would alleviate this issue, but at the cost of complexity.

Small tungsten incandescent lights are available down to 0.05 watts. With a suitable high-efficiency cathode coating, a pulsed heater power of less than 0.02

---

<sup>13</sup>GaAs MMIC market of \$2.2 Bn USD / random sample of MMIC prices = about 2 Bil devices / yr, 3e9 wifi connected devices produced each year,

## Acknowledgements

This paper is not novel enough to deserve this chapter, but those to be acknowledged are.

The authors of the original papers deserve the credit for this entire work; it is rare that such a monumental finding is served on a silver platter.

Professor Shahramian's excellent video blog *The Signal Path* inspired this work.

Dr. Dainis' videos on microbiological technique were also useful.

Thanks to the professors at York and beyond for returning my emails.

Thanks to L.H. for wisdom regarding this project.

Thanks to P.B and H.P. for tolerating ramblings and M. for the hug.

Special thanks to all the people - most equally capable of writing this paper if provided the opportunity - who work menial shifts at the component suppliers that remained open that were so critical. Hopfstader be damned; despite the name below the abstract, this paper is of course entirely the result of circumstance and luck.

Chiefly among the enablers are of course my parents, Doris and Brian, without whom this work would have been done by someone else, and who also supported this work financially.

The authors acknowledge the Computational Electromagnetics Group at The University of Texas at Austin for developing and making the AustinMan and AustinWoman human body models available at <https://sites.utexas.edu/austinmanaustinwo>

One Very Important Thought

<3

# Captain's Log, Supplemental

## **Molecular dynamics simulation**

It was originally expected that a large part of this work would be done in-silico, as we did not anticipate having access to suitable RF test equipment.

Some time was spent attempting to set up a molecular dynamics toolchain capable of simulating an entire virus.

Having an approximate simulation of the this technique would be useful for a number of reasons:

We would have a better idea of the transferability to SARS, without wasting the time of experts with BSL-3/4 labs.

The impulse could be subjected to the same optimization as the RF feedback loop. A number of parameters (such as phase, polarization)

Coarse-graining also greatly increases the allowable timestep.

We also did not understand the \*confined\* part in the \*confined\* acoustic resonance.

Simulating the aggregate bose condensate wavefunction is well beyond us.

## optical\_centrifuge

June 28, 2020

Optical centrifuges rotate the polarization axis of an electromagnetic field, spinning up polarized molecules until centrifugal forces rip them apart. This has been demonstrated with simple molecules [Villeneuve 2000], [Karczmarek 1999].

The oscillating electric field in our technique induces a slight dipole polarization on the virus, giving us a foothold through which a torque could be applied.

Modulating the polarization axis of microwave transmitters is an established technique, and can be accomplished in a number of ways:

- Switching the antenna feedport location using PiN diodes [Medina-Sanchez], [Silveira 2018] (limiting the switching frequency to a few KHz)
- Modulating the phase shift between feed-ports so as to produce circular polarization
- Mechanically rotating the antenna
- Using four or more standard linearly-polarized antennas at various angles, modulating the power to buffer amplifiers.

There is also the concern that biological tissues could exhibit the same effect.

This sounds plausible, but then most wrong ideas do.

A first-order Fermi estimate:

We will need the dipole moment, and for this we need the charge separation.

Here we make our first assumption; that the charge separation is the same as the mechanical displacement. This is only a good approximation if each charge is strongly bound to a site on the virus, and is almost certainly wrong. Computing the true polarizability seems quite involved.

Born-Oppenheimer surfaces, which some molecular dynamics programs can account for [GROMACS 2020].

We the amplitude from [Yang 2015], eq. 7,

$$A = \frac{qE_0}{\mu \sqrt{((2\pi f_{res})^2 - (2\pi f_{excite})^2)^2 + \left(\frac{(2\pi f_{res})(2\pi f_{excite})}{Q}\right)^2}}$$

and we assume that the charge separation is twice the amplitude -  $d_q = 2A$ .

Next we need to know how much energy is lost to friction. Here comes our next, even more unreasonable assumption: that the friction coefficient for rotation is equal to that of the dipole translation. This allows us to extract the friction coefficient from the vibrational Q factor obtained by [Yang 2015].

If the former was unfounded, this one is kooky. Unlike in translational vibration, where the solvent must be inertially displaced, according to [Steele 1963], in the molecular regime a perfect sphere can theoretically undergo perfect slip with the surrounding solvent; friction can only be



introduced if there is a change in potential energy between different positions, and a uniform sphere has equal potential energy in every position.

This also means that for molecular dynamics simulation, implicit solvation techniques using, for instance, Langevin integrators with fixed damping coefficients are not a good match for this problem.

Via [Hu 1974], a small degree of oblateness or prolateness can affect the rotational friction coefficient decisively. But if the virus tends to rotate along its minimum friction axis, this effect should not be pronounced.

The virus's surface is not smooth; spike proteins and other clutter may also slow its rotation.  
A drag force coefficient

$$D = \frac{\sqrt{\mu k}}{Q}$$

$$2\pi f_{res} = \sqrt{k/\mu}$$

$$k = (2\pi f_{res})^2 \mu$$

$$D = \frac{\sqrt{\mu^2 (2\pi f_{res})^2}}{Q}$$

assuming that the drag force is exclusively applied to the outer envelope,

$$F_{tangential} = Dv$$

$$v = d_{virus} \pi f_{rot}$$

$$\tau_{friction} = D\pi f_{rot} (d_{virus}^2)/2$$

$$p = q \cdot d_q$$

$$\tau_{dipole} = pE$$

$$pE = D\pi f_{rot} (d_{virus}^2)/2$$

$$f_{rot} = \frac{pE}{D(\pi)(d_{virus}^2)/2}$$

where

D = drag force coefficient

p = dipole moment

q = separated charge (1/2 total charge), C

M = virus mass

mu = reduced mass

k = spring constant of mass-spring system

Q = virus quality factor  
 d\_virus = virus envelope diameter, meters  
 E = electric field, V/m  
 f\_res = resonant frequency of linear, dipole mode, Hz  
 f\_rot = frequency of rotational mode, Hz  
 v = tangential velocity at envelope surface

Charge displacement: 32 pm  
 6.031857894892403e-10  
 Peak rotational frequency: 4e+03 Hz

From [Holsapple 2008], the upper bound on the limiting angular frequency for a homegenous elastic sphere is at most  $2.236 \bar{\omega}$ :

$$\bar{\omega} = \sqrt{3} \sqrt{\frac{Y}{\rho a^2}}$$

with radius  $a$ , mass density  $\rho$ , yield stress  $Y$ .

Limit frequency: 2e+08 Hz

The damping, yield stress, and charge separation would each have to be off by a factor of 50 for this to be a viable technique, which is probably unlikely.

The rotation-induced signal modulation could still be useful for detecting the existence of the virus; but for inactivation, better techniques exist.

9.276557494642485e-06  
 0.6366197723675813

Contrary to some [Hardell 2017] reports, we do not find the FCC and ICNIRP to be significantly affected by special interest groups; their rationales appear to be transparent. [FCC-19-126A1] an FCC memorandum wherein the FCC tells groups to respectfully screw themselves no fewer than three times: "Similarly, IEEE-ICES urges the Commission to adopt a higher SAR exposure limit of 2 W/kg averaged over 10 g. [snip] We are not persuaded that the IEC standard should be adopted at this time.", "Medtronic and the AAMI-CRMD recommend a more relaxed threshold of 20 mW. We decline to increase the 1-mW threshold."

Things heating up at the Microwave Safety fandom.

---

There seems to be a discrepancy between [Yang 2015] and our reading of [C95.1-2005].

They use a threshold in open public space of  $100(f/3)^{1/5}$  W/m<sup>2</sup>. The 115 W @ 6 GHz they provide correctly corresponds to this equation with a coefficient of 100.

For Table 9, general public, the equation is  $18.56(f)^{0.699}$  W/m<sup>2</sup>, or 64.93 W/m<sup>2</sup> @ 6 GHz.

Different versions of the IEEE standard have used equations of equivalent form but with different coefficients [Wu 2015]; it is entirely possible that we have retrieved the wrong standard.

---

CEL did not supply a SPICE model for the GaAs FET device used in early prototypes. A FET was originally because a gate is ostensibly easier to bias than a base; but this turned out to be unfounded.

[Steenput 1999] has an interesting analytic method to synthesize a SPICE model suitable for a transient simulations from S-parameter measurements using negative resistances. However, this neglects the I/V characteristic.

[Polyfet 1998] describes a simple optimization method to synthesize a SPICE model for an active device, and CEL appnote provides some details for GaAs devices.

---

OpenEMS is excellent, with Python bindings, some lumped components, and mesh refinement. However, embarrassingly, we were not able to resolve all the dependency issues in order to install it.

---

## *Wherein an oscillator is designed*

---

### **Biasing**

In our simulations, the varactor-tuned feedback circuit appeared to be particularly sensitive to the introduction of bias-tees.

The gate must be weakly pulled to ground, otherwise stray charge destroys the oscillation.

With 0.79 mm FR4 substrate and 0.2 mm (8 mil) wide traces, the maximum impedance achievable was about 115 ohms, which did not appear to be sufficient as an RF choke. Use of defected grounds can increase inductance, but this was not evaluated.

If suitably high-impedance traces are not available, a common technique is to use a quarter-wavelength line (approximately 6 mm long with the above parameters at 8 GHz) terminated with a stub to produce a virtual short or open circuit [Seo 2007].

However, reflections from these structures still appeared to distort the frequency/phase response beyond repair, even with ostensibly wideband stubs [Syrett 1980].

Rebuke: despite this blather, many other papers have had success with bias-tees at these frequencies.

Alternate methods evaluated, failures:

In production, these could be accommodated by graphite-polymer printed resistors.

Odd-pole varactor-loaded combline filters appeared to have excellent phase and frequency response; however, the geometry necessitates low-inductance via stitching to the ground plane.

*autem* Others have had great success with varactor-tuned comblines, especially non-grounded lines.

[Tsuru 2008 fig. 10] is an excellent review of various oscillator designs.

The parasitic inductance of common varactors appears to become problematic at these frequencies (but not for non-wideband use).

## Spacing

FDTD results still yielded some coupling at 2 mm isolation.

## Via stitching

Rather than the almost universal technique of via stitching components immediately to the ground plane (a tedious process with our prototyping setup), a large ground pour on the component layer was used wherever ground was needed, as mentioned in [Hunter? combine]. Since we use microstrip rather than coplanar waveguide,

Since the ground plane does not participate in the DC bias at all, no vias are required in the final device. This means that the drilling, electroless strike and electroplating steps are unnecessary for production.

---

## *The wideband oscillator*

---

Not having access to any RF equipment, we needed an oscillator tunable over the X-band.

There are many oscillators. The HB100 uses a dielectric resonator, for instance; cavity-based methods with mechanical tuning; active antennas using.

The literature is quite mature, partly due to the FCC's recent ultrawideband communications guides.

As a result of our gross incompetence, the oscillator was designed via an inane, roundabout, and fiendishly tedious manner, and our description of this technique only contributes to the field by being suitable for a dartboard; our analysis can only hold water when combined with paper mache; and a lesser invertebrate in possession of a copy of Grebennikov's excellent Microwave Oscillator Design would have accomplished the task faster.

Designing an oscillator of this type in one step with a few kindergarten equations appears to be well within the reach of modern network analytical techniques. Genetic algorithms are quite well matched to this problem, and many commercial software packages are [computer microwave design book].

We began experimentally by building a scaled version of [Mueller 2008]'s active antenna crudely with copper tape, using a CEL || GaAs FET.

We then manually tried a number of filter designs, using the manufacturer's S-parameters and QUCS' microstrip approximations. This initially appeared to yield good agreement with experiment. Peaks in the feedback voltage simulation corresponded approximately with peaks in the observed spectrum. [figures from LO prototype N].

A crude, inane, and extremely disorganized trial-and-error procedure was performed for many weeks. A wide variety of analytical methods for filter design were attempted [documents/global.ipynb], but simultaneously obtaining the correct phase shift and frequency response was somewhat difficult. Adding the parasitic inductance of the varactors always seemed to destroy our most perfect creations.

Using an SIR filter has the added advantage of confusing epidemiologists.


Eventually, QUCS, zonca/python-qucs, and scipy's basinhopper were used with a cost function somewhat similar to that described in [Kaplevich]:

```
freq_coeff = 1
phase_coeff = 1.5
ratio_coeff = 0.5
insertion_loss_coeff = 0.2

frequency_cost = freq_coeff * (abs(desired_center_frequency-fb_peak_frequencies[0])/1e9)
phase_cost = phase_coeff * abs(1.0 - phase_at_peak)
ratio_cost = ratio_coeff * fb_peak_ratio
insertion_loss_cost = insertion_loss_coeff*(1.0 - fb_peak_values[0])
cost = frequency_cost + phase_cost + fb_peak_ratio + insertion_loss_cost
```

Optimizing first for the high frequency, fixing the inductor and microstrip values, and then optimizing for the varactor values at the low frequency.


This produced a seemingly acceptable feedback loop (note the group delay / phase progression):

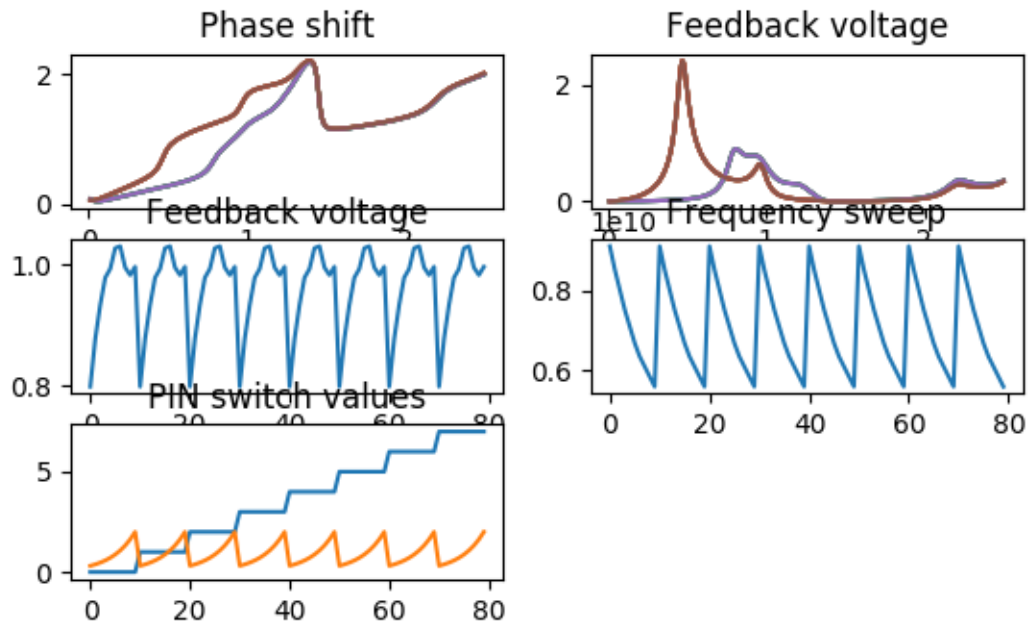

However, when this was built, varactor tuning performance was abysmal, with hops and peaks; and the tuning range was far smaller than expected.

It was thought that a transient simulation - to determine how the spectrum actually evolved - would improve the situation.

As of 0.0.20, QUCS' microstrip models are not yet compatible with transient simulations; and some improved filter designs required simulating coupling between more than two microstrips, which QUCS did not yet support natively.

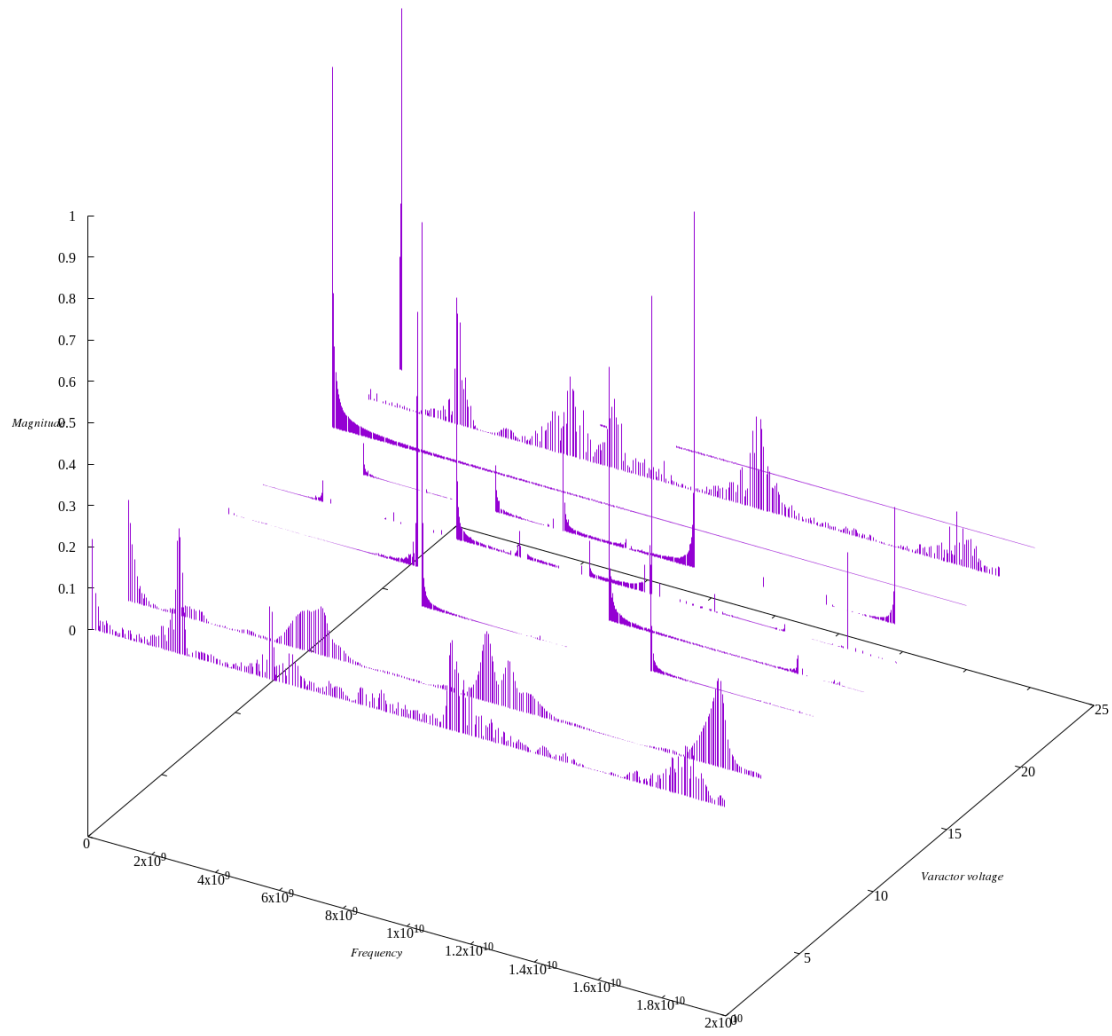

The complete transient simulation matched reality very closely.

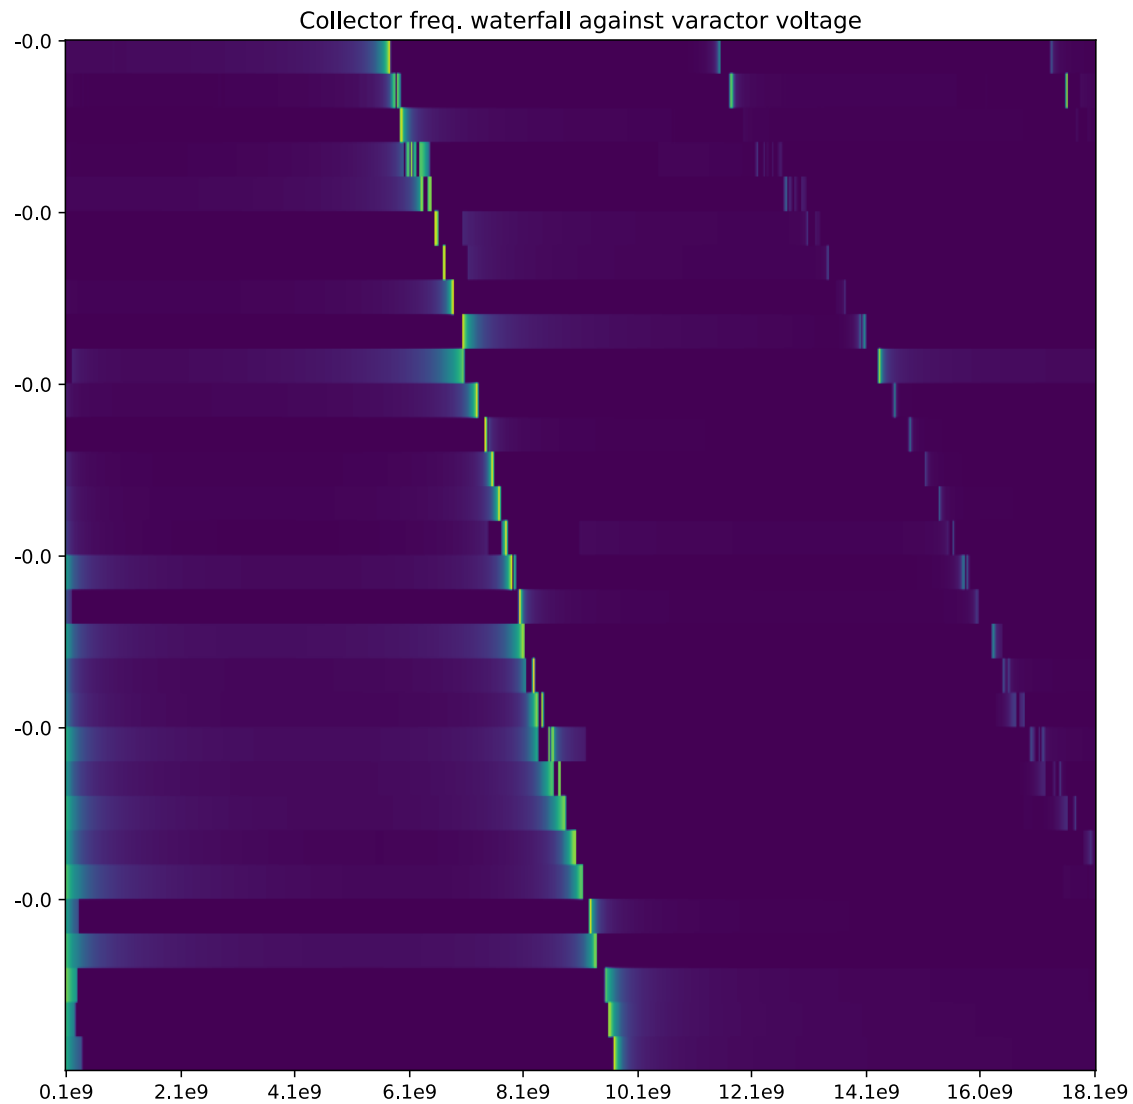


Figure 1: "Wideband VCO 2": BFP620

Oscillator tuning simulated with electronics/ngspice/oscillator\_designer\_2.py commit <>, eLabID 20200613-d28a8004c...

The oscillator design is a testament This highlights that a computation is not a substitute for understanding.

The key sticking point seems to be that as frequency increases, using microstrip design techniques, the parasitics of any filter structure are so large that the small change in impedance that the varactors can provide does not tune the circuit by any meaningful amount.

The two varactors on each tuning circuit each contribute 0.7 nH and between 0.35 to 2.4 pF; each blocking capacitor



contributes about 0.2 nH. The frequency range of the oscillator can be selected by adding between 0.5 nH to 1.5 nH symmetrically to both tuning circuits.

"Using the lead inductances of the bipolar transistor and varactors provides the required value of the base inductance".

Indeed, [Tsuru 2008]'s "tuned circuit" in Fig 8 is, in fact, just the varactors, plus an almost invisible high-impedance line.

The final oscillator is a 'wideband double-tuned varactor VCO', based almost verbatim on [Tsuru 2008] and the reference design in Figure 8.36, p378 of [Grebennikov 2007].

The rest of the papers in the bibliography were highly enlightening regarding the principles of microwave oscillator design.

For ease of design and simulation, selecting a device with both Touchstone S-parameters and SPICE models is greatly preferable.

It is commonly claimed that FR4 is a 'slow' substrate, and that the high loss tangent of 0.02 makes it unsuitable for microwave systems.

However, with this PCB substrate, the expected loss of only 0.026 dB/mm on signals of minimum 0 dBm is patently acceptable. As viruses do not have a discriminating palate, we are also only minimally concerned with  $S_{11}$  reflections, noise, or spurs, so precise impedance control is not required; the wideband VCO sweep accommodates for any variations in resonant frequency due to wide manufacturing tolerances.

This topology of oscillator worked marvellously on essentially the first try.

Not having a good analytical understanding, we resorted to using a purely computational method.

In addition, the design of wideband feedback-loop VCOs is a relatively well-explored field, and many reference designs exist.

Merely scaling designs like [] was not effective.

Several analytical filter design methods were

This is apparently known as a "double-tuned" wideband.

Oscillators must meet the Barkhausen criterion:

- A 360 degree phase shift around the feedback loop (including the phase shift contribution from the amplifier, which itself varies greatly with frequency)
- A loop gain  $> 1$ .

However, a third element is also required:

- A frequency-selective element that restricts oscillation modes and decreases phase noise.

With large feedback-loop structures, such as long PiN-switched phasing lines, proximity effects from nearby flesh would detune the oscillator significantly.

design of a triple-tuned oscillator.

The buffer amplifiers

---

In case you're wondering, like I was, why the voltage coefficient of capacitors

---

Again, inductive choke biasing in the feedback loop was practically impossible. Biasing PiN diodes with a 10kohm resistor, (with 330 ohm safety resistor) one to 48V bias and another through an 2N7002P N-channel mosfet worked fine.

The oscillator ran fine with a PiN bias of 2.34 mA. [LO prototype N]. A high bias voltage of 48V was required to get sufficient current through the two 10K resistors and the PiN diode to obtain a low impedance while remaining delicate with the vfb.

The PiN diode used has a resting resistance of 500 ohms, 5 ohms at 2 mA and 2 ohms at ??.

48V is a little tight on the 50V rated voltage of our DC blocking capacitors.

Each activated PiN diode should be biased separately, since putting 2x 2 mA through 20K would take an impractical 80V.

---

Conductors are represented by zeroing all components of the electric field in those regions.

There are many different possible source geometries, each introducing their own distortions.

There are many ways of linking SPICE and FDTD.

---

Bandpass filters can be designed by first designing a low-pass filter prototype (usually Chebychev) (or, in our case, using reference filter component tables), and then transforming this low-pass into a band-pass. [Hunter 2001] is an excellent overview of this process, with many design examples for different filter topologies.

The coupling coefficient between two low-pass filters determines the band-pass bandwidth.[Hui 2012]

[Hunter 2001] also describes an analytical method to create a filter with the precise group delay - phase shift versus frequency - required for stable oscillation. However, simultaneously compensating for the group delay introduced by the amplifier itself (nearly 180 degrees over the frequency range for the CEL part) seemed complex.

Phase shift can be introduced either via a length of microstrip, or a high-pass/low-pass filter [Microwave101]. Adding a fixed microstrip line restricts the tuning range, however, and the filter inevitably affects the frequency response.

---

NGSPICE's KSPICE coupled transmission lines require the capacitance and inductance per unit length in Maxwell matrix form, rather than the physical  $C_{even}/L_{even}$  (each line's capacitance and inductance to ground) and  $_{odd}$  (between elements) form provided by tools like wcalc. "matrix not positive definite". [Schutt-Aine] discusses this; we reproduce here for convenience.

$$L_{11} = L_{22} = L_{even}$$

$$L_{12} = L_{21} = L_{odd}$$

$$C_{11} = C_{22} = C_{even} + C_{odd}$$

$$C_{12} = C_{21}(unused) = -C_{odd}$$

---

In practice, the timestep required to obtain convergence in particularly tight corners of the SPICE simulation can drop to 1e-20, which is far below the Courant limit of the FDTD simulation. To eek out a bit more performance, a simple adaptive-timestep technique from [a] is used; we simply set the timestep so that the maximum change in voltage per timestep from the SPICE portion is less than some threshold.

---

### *Power amplifier*

---

The amplifier and oscillator are separate for ease of design; this way the phase response of the amplifier is of no consequence.

Our target power for the test is about 0.01 W, mandating a  $2\sqrt{(2)}$  V peak to peak RF swing on the Z=50 output.

The  $V_{CEO}$  breakdown of the bipolar transistor in question is only 2.3V. Above this value, current begins to flow from the emitter to the base, turning on the transistor and causing thermal runaway. If the base bias has a low enough impedance and can source current, this  $V_{CEO}$  can be violated safely. [Toshiba, Bipolar Transistors, some other paper on the strong base bias]

One solution would be to match the output to a lower impedance [Leuschner 2010]:

Generating high RF power from low supply voltages poses also another problem: the optimum load impedance of the PA output stage transistors becomes very small. A matching network with a high transformation ratio is needed to transform the antenna impedance of 50 to the optimum load impedance. High transformation ratios usually result in small bandwidth and higher losses. Possible solutions are the use of either non-standard high power RF devices or special circuit topologies using only the available standard devices.

Use of so-called stacked, HiVP, or collector-feedback cascode designs can also allow the RF voltage to be distributed over many devices.

It should also be noted that when stressed, these devices can fail with a slow power-output degradation over weeks, an effect not usually found in lower-frequency designs.

---

### *Power sensing*

---

Method-of-moments solvers like NEC-2 are typical for simulating antennas. However, most commonly-available packages don't seem to handle multiple dielectric constants, such as the air and substrate for a patch antenna.

The impedance of an antenna over frequency can be determined in FDTD by:

- Applying a gaussian pulse to a voltage source - in our case, applied to a via connecting the path (or probe)
- Running the simulation until the transients have all died out below some threshold, while logging the source voltage and current at each timestep
- Taking the fourier transform of the (real) excitation voltage and current (producing a complex result, mind you)
- Taking the ratio of the two complex spectra.

This is the computational equivalent of dropping a piano off a balcony to see which key is stuck.

See [Penney 1994], [Luebbers 1992], [Luebbers 1991], [Luk 1997].

Our implementation is in `electronics/simple_fDTD/runs/U.py`.

A similar mismatch to the SPICE exists for fourier methods - but in the other direction. The courant limit often demands fine timesteps, but since each FFT bin is  $f_{bin} = n_{bin}/(N_{simulation} dt)$ , the majority of the FFT bins exist into the hundreds or thousands of GHz, leaving no resolution in the low-frequency domain of interest unless  $N_{simulation}$  is extremely large - even if all the transients in the simulation have died down, you still have to keep the sim running to make the FFT happy!

There's more than enough 'information entropy' in 4000 FDTD points for most antennas. But you need some 30,000 points to get 10 bins below 20 GHz!

There are a few methods of changing the FFT bin size artificially, which [Bi 1992] reviews. You can "use a manual fourier integration over the frequency region of interest".

But, in a staggering turn of events which will presumably be familiar to statisticians and preposterous to everyone else, a far simpler method is to *discard* 95% of the data, by down-sampling to 1/10th or so.

An equally simple method that seemed to produce better results in our case is to pad the voltage and current samples to the correct length. The jump discontinuity introduced by padding with zeros has a negligible effect.

It's so thumpingly unintuitive to me that adding 50,000 zeros to a 5000 value dataset can improve the resolution of a measurement by 300-fold.

It is important to remember to normalize the gaussian pulse, or else numerical noise will be introduced. The magnitude is not important - [Luebbers 1992] use 100v, others use 1v, etc.

Though uneven dt FFTs exist, the time step can be constant at the courant limit for this simulation.

A step impulse (1 first timestep, 0 otherwise) has been used in some works, though in our case performance was quite horrid.

A correction factor due to the staggered magnetic field of the Yee lattice must be introduced; [Fang 1994]. Their  $Z_2$  equation (correcting for spatial inaccuracies, but not temporal) was sufficient.

This technique is equivalent to that used in electrochemistry, known as fourier impedance spectroscopy - except they seem to usually use a known impedance source rather than a hard source, presumably because ideal hard sources don't exist in reality.

Allowing the simulation to run for long enough that all transients dissipate is important for accuracy - deceptive dips in the current can cause early termination. A surprising amount of detail is contributed by even the smallest current levels. Our threshold is 1e-7 amps for 700 iterations.

[Samaras 2004] has a very useful set of experimental and FDTD data for calibration and comparison. Comparing a probe via source in the different positions, we obtained agreement of  $\sim 7\%$  in impedance and  $\sim 5\%$  in frequency.

The use of a hard source feed-port affects the number of timesteps required by introducing unphysical transients. Using a port with a virtual 50-ohm resistance reduces the computational requirements by a large factor; see [Luebbers 1996].

Simply monitoring the source current during the simulation is somewhat deceptive. Periodically monitoring the change in the fourier transform seems to be a better convergence metric.

The units of the FFT (unlike those of the continuous FT) remain in volts.

---

Most equations in papers on the FDTD method are supplied without making the scaling factors explicit; some need multiplying by the Courant number, For use with flaport/fdtd the H-field to current line integral in [] requires scaling by  $\mu_0 * (dx/dt)$ , where  $\mu_0$  is the vacuum magnetic permittivity, dx the cell size, and dt the timestep - despite the equation already possessing a deceptive set of  $dx$ -es.

Naturally, if one is competent, this discrepancy will be immediately obvious. Those not dimensionally-intuitive, such as myself, find it useful to run dimensional analysis using a unit-aware calculator such as *sharkdp/insect*.

---

### *The antenna itself*

---

The impedance of a patch antenna varies with position on its surface. Probe feeds to a specific point on the patch

Unfortunately, patch antennas have a relatively narrow bandwidth.

---

### *Power sensing*

---

The diode detector power sensor is based on the Infineon appnote [] and [], itself based on a circuit from The Art Of Electronics.

A detailed description of various diode detectors are found in []. Because the steady-state current through the detector is very small, the microstrip can simply be terminated in the standard manner.

The Mini-Circuits ZX47-40-S+ would be an excellent low-cost COTS alternative.

---

### *Fluidics*

---

We had anticipated having to perform a large number of tests for optimization of the impulse. Automating tests also has the advantage of removing operator bias, and (in our case) minimizing artifacts from the sample holder. Since all the components were already computer-controlled, it seemed little extra effort.

We originally planned on using techniques from the rapidly accelerating field of centrifugal microfluidics, using a broadband patch antenna smaller than the cuvette, and measuring transmission absorption.

Centrifugal microfluidics has the advantage of getting a pump for free; mixing can be effected by generating vortices by accelerating and decelerating quickly; and because everything is circular, it is easier to design equidistant.

However, aligning seemed liable to produce artifacts; runout in the spindle;

Sterilization is often effected by cytotoxic gas []. UV we resorted to autoclaving, warping.

Th edges are charred; however, we have not found any discussion of toxicity of the laser cut edges, so we assume they're fine.

In a crude version of transmission welding, Tx welding usually relies on one material being transparent, and the other opaque - clear and black plastics, for instance. We obtained nearly useable results by scuffing one surface and rubbing in fine graphite powder.

Both the hydrophobicity / wetting angle of the substrate (useful for valves with a certain threshold pressure, among other things), the adhesive surface energy, and sterilization can all be effected by UVC exposure. Unfortunately, we were not confident in the homogeneity of the

Not all plastics can be laser welded.

3DuF; this is an excellent program

One problem with the formal, academic paper format is that one starts to believe what is written, which is a death sentence for accurate reasoning. We try to avoid this by being unprofessional.

1

## Timeline

## Comments by others

## Lessons Learned

---

Automatic, no-effort documentation of simulation and experiment runs is critical.

It may be helpful to think of simulations very similarly to IRL experiments.

A simulation is just a universe in a bottle that you can examine more closely; as with real-world, you can learn much from observation, but

But this need for documentation conflicts with the rapid, iterative cycle necessary for productivity.

This is obvious to all competent, but when rapidly iteratively testing with simulations, it may be helpful to automatically save a package with images of all the components (schematics, graphs, input files) of each distinct test.

For comparison to experiment, having a webcam take an image of the assembled board is also helpful.

Many months of testing have vanished into the ether due to

Version control alone isn't quite enough. Just having a simulation setup file somewhere in the commit history isn't "discoverable" - that is, you must be able to see what the input and output was without re-running the simulation.

Manually taking notes tended to disrupt the flow of testing; and in any case, just noting "SIR filter has appropriate phase response" is almost useless. What *was* the phase response? Plot it!

Software such as Sumatra, Sacred, recipy, and others. In our case, we used eLabFTW's elabapy bindings.

---

It is far easier to use existing, well-characterized reference designs verbatim than to modify

---

When rapidly testing data analyses which aren't really conducive to unit testing, I previously used to run the whole simulation, look at the analysis, re-run the sim, etc.

This is slow. I often don't change the input parameters for the sim, but just the analysis. However, there's often a large amount of state to persist to disk.

Saving the entire session with 'dill' is very helpful.

---

Software opacity is evil.

---

A great deal of time was spent trying to resolve version conflicts and dependency hells with the numerous libraries used by all the simulation programs. Over a week was spent trying to recursively track down all the This also wastes developer time - some fraction of issues raised are due to library version conflicts.

Packaged binaries help this slightly, but of course don't help if modifications are required, and managing shared libraries is still a tricky matter.

Good solutions include OpenFOAM's Docker installation. In some cases, using chroot with the original developer's Linux distribution is also of some utility.

But this all seems like quite a lot of overhead and opacity for what ultimately doesn't seem a super-complex problem: deterministically obtain a known-good version of a library, build locally, and set paths appropriately.

A good example might be gTest's cmake integration.

In the extreme, systems exist to extract every

In some situations (especially where the library has a permissive licence) perhaps it could be useful to consider packaging a complete, batteries-included 'known good' repository, either with the source of all the correct library versions included, or with a script to clone and compile the specific version used, integrating all the libraries with the build system.

For instance, this was done with the PDB reader in the OpenMM wrapper and JAMES.

---

There's also a very neat thing that seems to be common in computational biology, but which doesn't seem popular in other fields. After an algorithm or software tool is written (and the source published separately), a simple CGI frontend is written around it and hosted on the university's servers. eLNemo and the CHARMMing web interface are advanced examples of this. This way, anyone with an input file can get results without futzing around with installation.

The computational biologists have beat us at our own game.

---

We have always encountered wasting extreme amounts of time on subtle assembly mistakes in hardware prototypes.

In one example in this project, many hours were wasted because the enamel insulation on a bodge wire had not burned off completely in the solder joint, leading to a high-impedance connection.

The same has occurred in previous projects; in one example, many days were spent debugging software to fix an apparently slow hardware interrupt, which ended up being the result of a poor solder paste stencil leading to a hidden high-impedance connection to a leadless package.

Many failures are the result of carelessness in modification and lack of inspection. Others would only have been found by a 100% electrical test.

If flying-probe or bed-of-nails tests can be made sufficiently rapid and closely coupled with the existing toolchain,

In *2001: A space odyssey*, an automated system is shown guiding the troubleshooting of an assembly, apparently generating a fault tree of all the

Boundary-scan features might really help

---

Numerology doesn't pay

---

The ability to almost immediately compare simulation to experiment was essential.

---

This project started at the tail end of a project to produce ceramics. Many weeks were wasted; I had convinced myself that ceramics were required over FR4.

---

I originally rationalized not contacting others about . There are some 10,000 labs working on a cure; it's not helpful to have random amateurs tying up expert time with ignorant flights of fancy.

Later, as the project became more mature and seemed likely, this morphed into a sort of arrogance.

An expert in microwave engineering could probably have completed this entire project in a few days, rather than the months it took us.

---

## Hall of Hubris

Lest our hats stop fitting

---

An inane remark:

We believe once we have the P. Syringae host, we from environmental samples  
Truly the depths of Dunning-Kruger.

---

An expert and distinguished gentleman that we contacted regarding assistance resolving transients in our microstrip VCO stated the following:

This was a perfectly sensible remark; it is almost always the case that (at X-band, no less!) a custom IC would have been needed to build a VCO.

Also, if taken in the context of a tired, overworked PI getting an unsolicited email from an excessively verbose undergraduate at a different university, I hardly think I would have replied differently.

However, I think this person may have missed out. Learning

So perhaps it is wise to ponder the ideas of fools for skeet; one always learns target practice, if only an example what not to do, and occasionally one learns positively. I have often found that I learn greatly from working on the projects of others.

We present this only as a cautionary tale in the hopes that someday I will listen.

---

[Back](#)

## References

- [1]
- [2]
- [3]
- [4] -fdtd/-voltages: Voltage sources between selected points.
- [5] 15. Microwave Oscillator Design - Knovel.
- [6] 2 RF Transistor Fundamentals.
- [7] 2. Sinusoids.
- [8] 47 CFR § 15.231 - Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.
- [9] 6i25 picture.
- [10] A532901.pdf.
- [11] Accessing Intel ICH/PCH GPIOs — whitequark's lab notebook.
- [12] ADF4351.
- [13] Analysis of Broad Banding and Minimization Techniques for Square Patch Antenna.
- [14] *Antentop 02 2003*. AntenTop.
- [15] Atmospheric attenuation.
- [16] AtomsK - Documentation.



- [17] Attenuator.
- [18] AustinMan and AustinWoman: High-fidelity, anatomical voxel models developed from the VHP color images - IEEE Conference Publication.
- [19] Autoclave Use.
- [20] The Bacteriophage Bank of Korea.
- [21] Basics of molecular dynamics.
- [22] BJT Modeling and Verification in QUCS.
- [23] BSS84.
- [24] C - Error handling in embedded systems development.
- [25] C95.1-2019. Technical report, IEEE.
- [26] CE3520K3.pdf.
- [27] CEL.
- [28] CELLmicrocosmos.org - project.
- [29] CELLmicrocosmos.org - startCm2 (SSL).
- [30] CHARMM-GUI.
- [31] CHARMMing Web interface.
- [32] CHARMM:The Basics - CHARMM tutorial.
- [33] Cmake.
- [34] Convert Agar media to broth media?
- [35] Damped Driven Oscillator.
- [36] David Knight. Electromagnetics, electronics, science & engineering.
- [37] Design notes for RF pad devices.
- [38] The Design of Direct Coupled Band Pass Filters. page 6.
- [39] Design with PIN Diodes.
- [40] Dielectric Properties of Body Tissues: Home page.
- [41] Dielectric Properties of Body Tissues: Output data.
- [42] Dimensions of T4 capsid head - Bacteriophages T2 and T4 - BNID 104846.
- [43] Dr. Dobb's | Good stuff for serious developers: Programming Tools, Code, C++, Java, HTML5, Cloud, Mobile, Testing.
- [44] E-CFR: TITLE 21—Food and Drugs.
- [45] ECP-copa/Cabana.
- [46] Effect of wavelength and beam width on penetration in light-tissue interaction using computational methods.
- [47] An Effective Treatment for Coronavirus (COVID-19) \_ .
- [48] Electronic Ultra-High Vacuum Pump: Review of Scientific Instruments: Vol 29, No 5.
- [49] elNémo: The Elastic Network Model.
- [50] Em: Talk - Microstrip Patch Antenna Calculator.
- [51] EMC: Enhanced Monte Carlo A multi-purpose modular and easily extendable solution to molecular and mesoscale simulations by Pieter J. in 't Veld.
- [52] EMDB EMD-6082 structure summary < Protein Data Bank in Europe (PDBe) < EMBL-EBI.
- [53] Escherichia coli, K-12 Strain, Living, Nutrient Broth, Tube | Carolina.com.

- [54] Exclave: Hardware Testing in Mass Production, Made Easier « bunny's blog.
- [55] Far infrared sensor array at high speed with low noise (16x4 RES).
- [56] Fast Facts on U.S. Hospitals, 2020 | AHA.
- [57] FCC ONLINE TABLE OF FREQUENCY ALLOCATIONS.
- [58] Feynman.
- [59] Force scales at the biological level.
- [60] Galaxy Training: Introduction to Galaxy Analyses.
- [61] Gaudi.ch - open culture technology.
- [62] German Collection of Microorganisms and Cell Cultures GmbH: Details.
- [63] Get IEEE C95™ STANDARDS for free | EBEA.
- [64] Google Colaboratory.
- [65] GRAPHITE RESISTORS.
- [66] High voltage fast-switching NPN power transistor. page 11.
- [67] How does one extract pseudomonas syringae from Canada thistle?
- [68] How to Make boric acid from borax « Science Experiments :: WonderHowTo.
- [69] How to prevent contamination from phage in E coli-heavy lab?
- [70] [http://www.mwjjournal.com/Journal/Print.asp?Id=AR\\_4121](http://www.mwjjournal.com/Journal/Print.asp?Id=AR_4121). page 19.
- [71] I have a few questions about growing E. coli in bioreactor - and the obligatory question mark?
- [72] IBD185; Mini PCI-E GPIO Extension cards GPIO 16-in 16-out (ST STM32F103VBT6).
- [73] IET Digital Library: Series feedback integrated active microstrip antenna synthesis and characterisation.
- [74] Inactivation of viruses by laser-driven coherent excitations via impulsive stimulated Raman scattering process.
- [75] Index — scikit-rl.
- [76] Introduction to Maxima.
- [77] IRAM - The Virus Capsids Database.
- [78] Isoelectric.
- [79] Isoelectric point for PDB proteins Dec 2015 - RepOD.
- [80] Jdurrant / lipidwrapper.
- [81] JPL TRS Home.
- [82] The LaTeX fetish (Or: Don't write in LaTeX! It's just for typesetting) – Daniel Allington.
- [83] LaTeX Templates » Stylish Article.
- [84] Linux Kernel Driver DataBase: CONFIG\_GPIO\_AMD8111: AMD 8111 GPIO driver.
- [85] Martinos Center Anthropomorphic Phantoms.
- [86] Material-Compatibility-Chart-Updated.jpg (2337×1653).
- [87] Maxima, a Computer Algebra System.
- [88] Mdcare.
- [89] Microwaves101 | Microwave Rules of Thumb.
- [90] Microwaves101 | Unequal-split Power Divider Calculator.
- [91] Modelithics COMPLETE Library - Modelithics, Inc.
- [92] Molecular Dynamics of Viruses.

- [93] MOSFET analysis.
- [94] MPC1-IBD185 IBASE | Mouser.
- [95] *NASA Technical Memorandum*. National Aeronautics and Space Administration.
- [96] Ngspice / Re: [Ngspice-users] Anybody understand CPL models?
- [97] NiteFury.
- [98] Normal Mode Analysis.
- [99] Numba: A High Performance Python Compiler.
- [100] Openmm CustomExternalForce · Issue #1892 · openmm/openmm.
- [101] OpenMM Script Builder.
- [102] OpenWetWare.
- [103] Output Variables from nf2ff - openEMS.de.
- [104] Packmol - Initial configurations for Molecular Dynamics.
- [105] Pappu Lab.
- [106] Parasitic Inductance of Bypass Capacitor II.
- [107] Partial List of BSL1 bioagents.pdf.
- [108] PCB Material Selection for RF Microwave and Millimeter wave Designs.
- [109] Phac\_nonpathogenic\_organisms.pdf.
- [110] Phages: FAQ.
- [111] Phys. Rev. Lett. 82, 3420 (1999) - Optical Centrifuge for Molecules.
- [112] PicoEVB Xilinx Artix FPGA development board M.2 PCIe.
- [113] Plaque formation.
- [114] POLAROGRAPHIC OXYGEN SENSORS. Technical report.
- [115] Pre/Post Processing Tools for use with LAMMPS.
- [116] Product Details – AquaTray.
- [117] ProDy — Protein Dynamics and Sequence Analysis.
- [118] Programmatic Layout with KiCad and Python.
- [119] Programs for Normal Mode analysis with the Elastic Network Model.
- [120] Promode Elastic - Protein Data Bank Japan.
- [121] Proteome-pI: Proteome isoelectric point database | Nucleic Acids Research | Oxford Academic.
- [122] Purdue University - Department of Chemistry - Centrifuge Explosion.
- [123] Python - Example to understand scipy basin hopping optimization function.
- [124] Quite Universal Circuit Simulator / Re: [Qucs-help] About transistor models.
- [125] RCSB PDB.
- [126] Re: [lammms-users] Bead-spring model with different bead size.
- [127] Read | Scholars Portal Books.
- [128] The reduction of copper oxide.
- [129] Reduction of Copper Oxide with Charcoal.
- [130] Repetitive Strain Injuries Tutorial.
- [131] Reproducibility and Replicability — SEAMM 0.8 documentation.

- [132] RESOLUTION OF NOTICE OF INQUIRY, SECOND REPORT AND ORDER, NOTICE OF PROPOSED RULEMAKING, AND MEMORANDUM OPINION AND ORDER.
- [133] Rf - How to design a 10GHz PCB antenna.
- [134] RUMD.
- [135] Safety of nutrient broth.
- [136] SARS CoV-2 Virion (NIAID) | NIH 3D Print Exchange.
- [137] Scite\_.
- [138] A simple 10Ghz diode frequency marker.
- [139] Simple Centrifuge Rotor (Microfuge) by Volkchemie - Thingiverse.
- [140] SimTK: OpenMM: Downloads.
- [141] S.N.A.P - Scaleable Node Address Protocol.
- [142] A Softer World was ever Friday.
- [143] Software.
- [144] Storing Bacterial Strains.
- [145] Straight Channel Chips with 16 Parallel Channels - Fluidic 152.
- [146] Structure of influenza virus.
- [147] TARGET THERAPIES FOR TREATING COMMON VIRAL INFECTIONS.
- [148] [The anomalous isoelectric properties of influenza virus matrix protein M1]. - Abstract - Europe PMC.
- [149] Thermodynamics - Molecular dynamics: Thermostat via damping modulation.
- [150] Torvalds/linux.
- [151] Tutorial: Microstrip Notch Filter - openEMS.
- [152] Tutorial: MRI LP Birdcage - openEMS.
- [153] Tutorial: Patch Antenna Phased Array - openEMS.
- [154] Tutorial/Basics - MEEP Documentation.
- [155] Understanding, Operating, and Interfacing to Integrated Diode-Based RF Detectors | Analog Devices.
- [156] Understanding the FDTD Method.
- [157] Variable PIN Diode Attenuator - Daycounter.
- [158] VCO tutorial.
- [159] Vibran.doc.
- [160] VIPERdb 5vf3.
- [161] VIPERdb 5vf3.
- [162] VIPERdb 5vf3.
- [163] VIPERdb 6hy0.
- [164] Voltage Followers.
- [165] Why I'm Using Bitmarks on my Products « bunnie's blog.
- [166] Why is 600nm wavelength recommended for optical density check of bacteria culture and is there any literature to back it?
- [167] A Wideband, Varactor-tuned Microstrip VCO. page 5.
- [168] World-2DPAGE Constellation: SWISS-2DPAGE.

- [169] Xnec2c User Manual.
- [170] Zoono tests successfully against coronavirus COVID-19.
- [171] *Advances in Virus Research*. Academic Press, April 1974.
- [172] Using a pressure cooker as an autoclave. *EPI newsletter*, 6(6):5–8, December 1984.
- [173] Extracting SPICE model, 1998.
- [174] Applying S-Parameters To Amplifier Design, July 2004.
- [175] Normal Mode Analysis. In Oren M. Becker and Martin Karplus, editors, *A Guide to Biomolecular Simulations*, Focus on Structural Biology, pages 155–171. Springer Netherlands, Dordrecht, 2006.
- [176] Wayback Machine, June 2006.
- [177] Design and development of batch fabricatable metal–insulator–metal diode and microstrip slot antenna as rectenna elements. 2007.
- [178] Eccentricity Explained, October 2008.
- [179] Y-12 NaK Accident Investigation, May 2010.
- [180] Wayback Machine, March 2012.
- [181] Wayback Machine, June 2015.
- [182] Cambridge Structural Database. *Wikipedia*, October 2019.
- [183] Autoprotocol/autoprotocol-python. Autoprotocol, June 2020.
- [184] Coulomb explosion. *Wikipedia*, April 2020.
- [185] DNA field-effect transistor. *Wikipedia*, March 2020.
- [186] GenericLab/TurbiGnUSB. GenericLab, April 2020.
- [187] Wilkinson power divider. *Wikipedia*, January 2020.
- [188] A. Poursaleh. Design and Simulation of High Power RF Modulated Triode Electron Gun.
- [189] E.R. Adair and R.C. Petersen. Biological effects of radiofrequency/microwave radiation. *IEEE Transactions on Microwave Theory and Techniques*, 50(3):953–962, March 2002.
- [190] Robert K. Adair. Vibrational Resonances in Biological Systems at Microwave Frequencies. *Biophysical Journal*, 82(3):1147–1152, March 2002.
- [191] A. Adar and R. Ramachandran. An HBT MMIC wideband VCO. In *IEEE 1991 Microwave and Millimeter-Wave Monolithic Circuits Symposium. Digest of Papers*, pages 73–76, Boston, MA, USA, 1991. IEEE.
- [192] Office of Regulatory Affairs. Radiation-Emitting Electronic Products. *FDA*, Tue, 10/08/2019 - 17:21.
- [193] Kirtland Ai. Analysis of rectangular microstrip antennas. *Microstrip Antennas*, page 61.
- [194] M. A. Akuji and D. J. Chambers. Hydrogen peroxide: More harm than good? *BJA: British Journal of Anaesthesia*, 118(6):958–959, June 2017.
- [195] Bruce Alberts, Alexander Johnson, Julian Lewis, Martin Raff, Keith Roberts, and Peter Walter. The Lipid Bilayer. *Molecular Biology of the Cell*. 4th edition, 2002.
- [196] Mihai Albulet. *RF Power Amplifiers*. SciTech Publishing, 2001.
- [197] Vaishnavi Ananthanarayanan and William Thies. Biocoder: A programming language for standardizing and automating biology protocols. *Journal of Biological Engineering*, 4(1):13, November 2010.
- [198] P. Andreani and S. Mattisson. On the use of MOS varactors in RF VCOs. *IEEE Journal of Solid-State Circuits*, 35(6):905–910, June 2000.
- [199] Aki Ariga. Tabula-py: Extract table from PDF into Python DataFrame, October 2019.
- [200] Nimalan Arinaminpathy and Bryan Grenfell. Dynamics of Glycoprotein Charge in the Evolutionary History of Human Influenza. *PLOS ONE*, 5(12):e15674, December 2010.

- [201] Caerwyn Ash, Michael Dubec, Kelvin Donne, and Tim Bashford. Effect of wavelength and beam width on penetration in light-tissue interaction using computational methods. *Lasers in Medical Science*, 32(8):1909–1918, 2017.
- [202] M Audi and M de Simon. Ion pumps. *Vacuum*, 37(8-9):629–636, January 1987.
- [203] L. Azar, Y. Shi, and S. C. Wooh. Beam focusing behavior of linear phased arrays. *NDT & E International*, 33(3):189–198, April 2000.
- [204] María Aznar Palenzuela. Coarse-Grained Modeling of the Assembly and Mechanical Properties of Viruses. October 2013.
- [205] M. Babincová, P. Sourivong, and P. Babinec. Resonant absorption of ultrasound energy as a method of HIV destruction. *Medical Hypotheses*, 55(5):450–451, November 2000.
- [206] Matthew D. Badham and Jeremy S. Rossman. Filamentous Influenza Viruses. *Current clinical microbiology reports*, 3(3):155–161, September 2016.
- [207] Sharmila Baliga, Sangeeta Muglikar, and Rahul Kale. Salivary pH: A diagnostic biomarker. *Journal of Indian Society of Periodontology*, 17(4):461–465, 2013.
- [208] Thomas A. Ban. The role of serendipity in drug discovery. *Dialogues in Clinical Neuroscience*, 8(3):335–344, September 2006.
- [209] Sanjay Banerjee. SiGe(C) MOSFET Technology. page 46.
- [210] W. Baschong, U. Aebi, C. Baschong-Prescianotto, J. Dubochet, L. Landmann, E. Kellenberger, and M. Wurtz. Head structure of bacteriophages T2 and T4. *Journal of Ultrastructure and Molecular Structure Research*, 99(3):189–202, June 1988.
- [211] W. Baschong, C. Baschong-Prescianotto, A. Engel, E. Kellenberger, A. Lustig, R. Reichelt, M. Zulauf, and U. Aebi. Mass analysis of bacteriophage T4 proheads and mature heads by scanning transmission electron microscopy and hydrodynamic measurements. *Journal of Structural Biology*, 106(2):93–101, April 1991.
- [212] Mark Bathe. A Finite Element framework for computation of protein normal modes and mechanical response. *arXiv:0704.0634 [q-bio]*, April 2007.
- [213] C. V. Beechey, D. Brooker, C. I. Kowalczyk, R. D. Saunders, and A. G. Searle. Cytogenetic Effects of Microwave Irradiation on Male Germ Cells of the Mouse. *International Journal of Radiation Biology and Related Studies in Physics, Chemistry and Medicine*, 50(5):909–918, January 1986.
- [214] Y Begassat, LA Ramboz, M-F Wong, V Fouad Hanna, and J Citerne. Modeling of an X-band planar balanced mixer with a mixed spice-FDTD program. *Microwave and Optical Technology Letters*, 13(2):99–102, 1996.
- [215] J. E. Beggs and N. T. Lavoo. A high-performance X-band triode. *Electrical Engineering*, 82(5):322–327, May 1963.
- [216] Stefan Berking and Klaus Herrmann. Formation and discharge of nematocysts is controlled by a proton gradient across the cyst membrane. *Helgoland Marine Research*, 60(3):180–188, September 2006.
- [217] Zhiqiang Bi, Ying Shen, Keli Wu, and John Litva. Fast finite-difference time-domain analysis of resonators using digital filtering and spectrum estimation techniques. *IEEE transactions on microwave theory and techniques*, 40(8):1611–1619, 1992.
- [218] Jo Bito, Bijan Tehrani, Benjamin Cook, and Manos Tentzeris. Fully inkjet-printed multilayer microstrip patch antenna for Ku-band applications. In *2014 IEEE Antennas and Propagation Society International Symposium (APSURSI)*, pages 854–855, Memphis, TN, USA, July 2014. IEEE.
- [219] Davor Bonefacic and Juraj Bartolic. Design Considerations of an Active Integrated Antenna with Negative Resistance Transistor Oscillator. *Radioengineering*, 14:33–39, December 2005.
- [220] Natasha Bonilla, Maria Isabel Rojas, Giuliano Netto Flores Cruz, Shr-Hau Hung, Forest Rohwer, and Jeremy J. Barr. Phage on tap—a quick and efficient protocol for the preparation of bacteriophage laboratory stocks. *PeerJ*, 4, July 2016.
- [221] Adrian Borja, Bill Hermann, and Brian Standley. 2.4GHz Microwave Power Amplifier. page 35.

- [222] F. X. Bosch. Studies on the development of the charge heterogeneity of the influenza virus glycoproteins. *Archives of Virology*, 83(3-4):311–317, September 1985.
- [223] M. Boulmalf and G.Y. Delisle. Optimization of coupled microstrip antenna in the 2.4 GHz ISM band. In *Conference Proceedings. IEEE Canadian Conference on Electrical and Computer Engineering (Cat. No.98TH8341)*, volume 2, pages 886–889 vol.2, May 1998.
- [224] Rena Brauer and Peter Chen. Influenza virus propagation in embryonated chicken eggs. *Journal of Visualized Experiments: JoVE*, (97), March 2015.
- [225] C.E. Brench and O.M. Ramahi. Source selection criteria for FDTD models. In *1998 IEEE EMC Symposium. International Symposium on Electromagnetic Compatibility. Symposium Record (Cat. No.98CH36253)*, volume 1, pages 491–494, Denver, CO, USA, 1998. IEEE.
- [226] D Brewer, K Schwartzentruber, and A Taylor. Use of Robotics To Dispense Culture Mediat. page 2.
- [227] Robert Wesley Brocato. FDTD simulation tools for UWB antenna analysis. Technical Report SAND2004-6577, 920838, December 2004.
- [228] Anne Bruttin and Harald Brüssow. Human Volunteers Receiving Escherichia coli Phage T4 Orally: A Safety Test of Phage Therapy. *Antimicrobial Agents and Chemotherapy*, 49(7):2874–2878, July 2005.
- [229] Daniel Bryan, Ayman El-Shibiny, Zack Hobbs, Jillian Porter, and Elizabeth M. Kutter. Bacteriophage T4 Infection of Stationary Phase E. coli: Life after Log from a Phage Perspective. *Frontiers in Microbiology*, 7, 2016.
- [230] D.N. Buechler, D.H. Roper, C.H. Durney, and D.A. Christensen. Modeling sources in the FDTD formulation and their use in quantifying source and boundary condition errors. *IEEE Transactions on Microwave Theory and Techniques*, 43(4):810–814, April 1995.
- [231] A. Buffi, P. Nepa, and G. Manara. Design Criteria for Near-Field-Focused Planar Arrays. *IEEE Antennas and Propagation Magazine*, 54(1):40–50, February 2012.
- [232] M. H. S. Bukhari, Y. Raza, S. Batool, T. Razzaki, A. Bukhari, F. Memon, M. A. Rauf, A. Rizvi, and O. Bagasra. DNA Electromagnetic Properties and Interactions. *arXiv:1704.06819 [physics]*, April 2017.
- [233] Hans-Joachim Bungartz. Algorithms of Scientific Computing II - 1. Molecular Dynamics Simulation. *Molecular Dynamics*, page 138.
- [234] Manuela Buonanno, Brian Ponnaiya, David Welch, Milda Stanislauskas, Gerhard Randers-Pehrson, Lubomir Smilenov, Franklin D. Lowy, David M. Owens, and David J. Brenner. Germicidal Efficacy and Mammalian Skin Safety of 222-nm UV Light. *Radiation Research*, 187(4):483–491, April 2017.
- [235] Elsa Cabrita, Vanesa Robles, and Paz Herráez, editors. *Methods in Reproductive Aquaculture: Marine and Freshwater Species*. Marine Biology Series. CRC Press, Boca Raton, 2009.
- [236] Kirt Blattenberger RF Cafe. Chebyshev Filter Lowpass Prototype Element Values.
- [237] J.A. Calviello, P.R. Liegey, and B. Smilowitz. A millimeter wave varactor with low parasitics. *Proceedings of the IEEE*, 59(3):419–420, March 1971.
- [238] Aniello Cammarano, Giovanna Luca, and Eugenio Amendola. Surface modification and adhesion improvement of polyester films. *Open Chemistry*, 11(1):35–45, January 2013.
- [239] G. Carter. Electrical clean-up of gases in hot cathode discharge tubes. *Vacuum*, 9(3):190–200, July 1959.
- [240] G. Caryotakis. The X-band klystron program at SLAC. (KEK-PROC-97-1), 1997.
- [241] CDC and CDC. Coronavirus Disease 2019 (COVID-19) - Transmission, March 2020.
- [242] Izabela Ceglarek, Agnieszka Piotrowicz, Dorota Lecion, Paulina Miernikiewicz, Barbara Owczarek, Katarzyna Hodyra, Marek Harhala, Andrzej Górski, and Krystyna Dąbrowska. A novel approach for separating bacteriophages from other bacteriophages using affinity chromatography and phage display. *Scientific Reports*, 3(1):3220, November 2013.
- [243] Wenquan Che, Liming Gu, and Y. L. Chow. Formula Derivation and Verification of Characteristic Impedance for Offset Double-Sided Parallel Strip Line (DPSL). *IEEE Microwave and Wireless Components Letters*, 20(6):304–306, June 2010.

- [244] Edward G. Chekan, John F. Cummings, Isaac Mabe, Shawn Hunter, and Jeffrey W. Clymer. Thickness of Cadaveric Human Lung Tissue. *Surgical Technology International*, 29:207–213, October 2016.
- [245] Nikolai K. Chemeris, Andrew B. Gapeyev, Nikolai P. Sirota, Olga Yu. Gudkova, Natalia V. Kornienko, Arina V. Tankanag, Igor V. Konovalov, Marina E. Buzoverya, Valeriy G. Suvorov, and Vyacheslav A. Logunov. DNA damage in frog erythrocytes after in vitro exposure to a high peak-power pulsed electromagnetic field. *Mutation Research/Genetic Toxicology and Environmental Mutagenesis*, 558(1-2):27–34, March 2004.
- [246] Tao Chen, Xiaohong Sun, Jianhui Wu, Xu Niu, and Huai Gao. A 2.4GHz GaAs HBT stacked power amplifier with inductance compensation. *IEICE Electronics Express*, 10(16):20130470–20130470, 2013.
- [247] Yifan Cheng. Single-particle cryo-EM at crystallographic resolution. *Cell*, 161(3):450–457, April 2015.
- [248] Cheol-Min Park, Moo-Sup Lim, and Min-Koo Han. A novel in situ vacuum encapsulated lateral field emitter triode. *IEEE Electron Device Letters*, 18(11):538–540, November 1997.
- [249] Chien-Nan Kuo, Siou Teck Chew, B. Houshmand, and T. Itoh. FDTD simulation of a microwave amplifier. In *Proceedings of 1995 IEEE MTT-S International Microwave Symposium*, pages 357–360, Orlando, FL, USA, 1995. IEEE.
- [250] C-K Chou. New IEEE EMF Exposure Safety Standard. page 47, 2019.
- [251] Y.L. Chow and K.H. Shiu. A theory on the broadbanding of a patch antenna. In *Proceedings of 1997 Asia-Pacific Microwave Conference*, volume 1, pages 245–248 vol.1, December 1997.
- [252] Kyungho Chung, Yongsik Nam, Taeyeoul Yun, and Jaehoon Choi. Reconfigurable Microstrip Patch Antenna with Switchable Polarization. *ETRI Journal*, 28(3):379–382, 2006.
- [253] Petr Chýlek, J. T. Kiehl, and M. K. W. Ko. Narrow resonance structure in the Mie scattering characteristics. *Applied Optics*, 17(19):3019, October 1978.
- [254] P Ciampolini, P Mezzanotte, L Roselli, and R Sorrentino. Efficient simulation of high speed digital circuits using time adaptive FD-TD technique. In *25th European Microwave Conference, 1995*, pages 636–640, Bologna, Italy, October 1995. IEEE.
- [255] P. Ciampolini, P. Mezzanotte, L. Roselli, and R. Sorrentino. Accurate and efficient circuit simulation with lumped-element FDTD technique. *IEEE Transactions on Microwave Theory and Techniques*, 44(12):2207–2215, Dec./1996.
- [256] Richard W. Compans, Jean Content, and Peter H. Duesberg. Structure of the Ribonucleoprotein of Influenza Virus. *Journal of Virology*, 10(4):795–800, 1972.
- [257] Michael Contreras, Brian Trease, Cezary Bojanowski, and Ronald F. Kulak. Characterizing Wheel-Soil Interaction Loads Using Meshfree Finite Element Methods: A Sensitivity Analysis for Design Trade Studies. In *54th AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics, and Materials Conference*, Boston, Massachusetts, April 2013. American Institute of Aeronautics and Astronautics.
- [258] Ben S Cooper, Richard J Pitman, W. John Edmunds, and Nigel J Gay. Delaying the International Spread of Pandemic Influenza. *PLoS Medicine*, 3(6), June 2006.
- [259] Y. Coulibaly, T.A. Denidni, and H. Boutayeb. Broadband Microstrip-Fed Dielectric Resonator Antenna for X-Band Applications. *IEEE Antennas and Wireless Propagation Letters*, 7:341–345, 2008.
- [260] Xin Cui, Hon Ming Yip, Qian Zhu, Chengpeng Yang, and Raymond H W Lam. Microfluidic Long-Term Differential Oxygenation for Bacteria Growth Characteristics Analyses. *RSC Advances*, page 34.
- [261] F. Dai. Scattering and transmission matrix representations of multiguide junctions. *IEEE Transactions on Microwave Theory and Techniques*, 40(7):1538–1544, July 1992.
- [262] Phil Danielson. A Journal of Practical and Useful Vacuum Technology. page 5.
- [263] Miriam E.R. Darnell, Kanta Subbarao, Stephen M. Feinstone, and Deborah R. Taylor. Inactivation of the coronavirus that induces severe acute respiratory syndrome, SARS-CoV. *Journal of Virological Methods*, 121(1):85–91, October 2004.
- [264] M.H. Davis. The slow translation and rotation of two unequal spheres in a viscous fluid. *Chemical Engineering Science*, 24(12):1769–1776, December 1969.



- [265] W.A. Davis and P.J. Khan. Coaxial Bandpass Filter Design. *IEEE Transactions on Microwave Theory and Techniques*, 19(4):373–380, April 1971.
- [266] O.E. Dawson, A.L. Conti, S.H. Lee, G.F. Shade, and L.E. Dickens. An Analog X-Band Phase Shifter. In *Microwave and Millimeter-Wave Monolithic Circuits*, volume 84, pages 6–10, San Francisco, CA, USA, 1984. MTT007.
- [267] Pedro J. de Pablo and Mauricio G. Mateu. Mechanical Properties of Viruses. In Mauricio G. Mateu, editor, *Structure and Physics of Viruses*, volume 68, pages 519–551. Springer Netherlands, Dordrecht, 2013.
- [268] Roger DeBloois. Match Impedances in Microwave Amplifiers. page 6.
- [269] James L. Derrick and Charles D. Gomersall. Surgical Helmets and SARS Infection. *Emerging Infectious Diseases*, 10(2):277–279, February 2004.
- [270] Robert C. Dickson, Sandra L. Barnes, and Frederick A. Eiserling. Structural proteins of bacteriophage T4. *Journal of Molecular Biology*, 53(3):461–474, November 1970.
- [271] Yanqing Ding, Li He, Qingling Zhang, Zhongxi Huang, Xiaoyan Che, Jinlin Hou, Huijun Wang, Hong Shen, Liwen Qiu, Zhuguo Li, Jian Geng, Junjie Cai, Huixia Han, Xin Li, Wei Kang, Desheng Weng, Ping Liang, and Shibo Jiang. Organ distribution of severe acute respiratory syndrome (SARS) associated coronavirus (SARS-CoV) in SARS patients: Implications for pathogenesis and virus transmission pathways. *The Journal of Pathology*, 203(2):622–630, June 2004.
- [272] R.J. Dinger, D.J. White, and D. Bowling. A 10 GHz Space Power Combiner with Parasitic Injection Locking. In *1986 IEEE MTT-S International Microwave Symposium Digest*, pages 163–166, June 1986.
- [273] A.R. Djordjevic and A.G. Zajic. Low-reflection bandpass filters with a flat group delay. *IEEE Transactions on Microwave Theory and Techniques*, 53(4):1164–1167, April 2005.
- [274] Janis L. Dote and Daniel Kivelson. Hydrodynamic rotational friction coefficients for nonspheroidal particles. *The Journal of Physical Chemistry*, 87(20):3889–3893, September 1983.
- [275] S. Drew and V.F. Fusco. Phase modulated active antenna. *Electronics Letters*, 29(10):835–836, May 1993.
- [276] Jens Ducreé, Stefan Haeberle, Sascha Lutz, Sarah Pausch, Felix von Stetten, and Roland Zengerle. The centrifugal microfluidic Bio-Disk platform. *Journal of Micromechanics and Microengineering*, 17(7):S103–S115, July 2007.
- [277] Jacob D. Durrant, Sarah E. Kochanek, Lorenzo Casalino, Pek U. Ieong, Abigail C. Dommer, and Rommie E. Amaro. Mesoscale All-Atom Influenza Virus Simulations Suggest New Substrate Binding Mechanism. *ACS Central Science*, 6(2):189–196, February 2020.
- [278] W. El-Kamali, J.-P. Grimm, R. Meierer, and C. Tsironis. New Design Approach for Wide-Band FET Voltage-Controlled Oscillators. *IEEE Transactions on Microwave Theory and Techniques*, 34(10):1059–1063, October 1986.
- [279] Abdelnasser A. Eldek, Atef Z. Elsherbeni, and Charles E. Smith. Wideband microstrip-fed printed bow-tie antenna for phased-array systems. *Microwave and Optical Technology Letters*, 43(2):123–126, October 2004.
- [280] Author eliesbik. Amazing rates, April 2020.
- [281] Tamer Elsherbeni, Khaled ElMahgoub, Lauri Sydänheimo, Leena Ukkonen, and Fan Yang. Survey of Laboratory Scale Fabrication Techniques for Passive UHF RFID Tags. 25(6):9, 2010.
- [282] E. Erdil, K. Topalli, M. Unlu, O.A. Civi, and T. Akin. Frequency Tunable Microstrip Patch Antenna Using RF MEMS Technology. *IEEE Transactions on Antennas and Propagation*, 55(4):1193–1196, April 2007.
- [283] A. Evilevitch, M. Castelnovo, C. M. Knobler, and W. M. Gelbart. Measuring the force ejecting DNA from phage. *arXiv:physics/0403057*, March 2004.
- [284] A.K. Ezzeddine and H.C. Huang. The high voltage/high power FET (HiVP). In *IEEE Radio Frequency Integrated Circuits (RFIC) Symposium, 2003*, pages 215–218, Philadelphia, PA, USA, 2003. IEEE.
- [285] Jiayuan Fang and Danwei Xue. Precautions in the calculation of impedance in FDTD computations. In *Proceedings of IEEE Antennas and Propagation Society International Symposium and URSI National Radio Science Meeting*, volume 3, pages 1814–1817 vol.3, June 1994.

- [286] Vera Faustino, Susana O. Catarino, Rui Lima, and Graça Minas. Biomedical microfluidic devices by using low-cost fabrication techniques: A review. *Journal of Biomechanics*, 49(11):2280–2292, July 2016.
- [287] C.J. Felice, M.E. Valentinuzzi, M.I. Vercellone, and R.E. Madrid. Impedance bacteriometry: Medium and interface contributions during bacterial growth. *IEEE Transactions on Biomedical Engineering*, 39(12):1310–1313, December 1992.
- [288] James J. Ferris and Lenore S. Clesceri. Inhibition of the Plaquing Efficiency of T4r+ Bacteriophage by Subtilisin 1. *Applied Microbiology*, 21(4):633–638, 1971.
- [289] Andrei Fokine, Paul R. Chipman, Petr G. Leiman, Vadim V. Mesyanzhinov, Venigalla B. Rao, and Michael G. Rossmann. Molecular architecture of the prolate head of bacteriophage T4. *Proceedings of the National Academy of Sciences*, 101(16):6003–6008, April 2004.
- [290] Henrik Forstén. Third version of homemade 6 GHz FMCW radar, September 2017.
- [291] Henrik Forstén. Backprojection Backpropagation, October 2019.
- [292] KR Foster, BR Epstein, and MA Gealt. " Resonances" in the dielectric absorption of DNA? *Biophysical journal*, 52(3):421–425, 1987.
- [293] C.E. Free and C.S. Aitchison. Single PIN diode X-band phase shifter. *Electronics Letters*, 21(4):128, 1985.
- [294] Al P. Freundorfer, Michael Sayer, and Justin Po. Barium Strontium Titanate Capacitor Fabrication on Copper Printed Circuit Board. *IEEE Transactions on Components, Packaging and Manufacturing Technology*, 6(11):1663–1666, November 2016.
- [295] H. Fröhlich. Long-range coherence and energy storage in biological systems: LONG-RANGE COHERENCE IN BIOLOGICAL SYSTEMS. *International Journal of Quantum Chemistry*, 2(5):641–649, September 1968.
- [296] H. Fröhlich. The Biological Effects of Microwaves and Related Questions. In L. Marton and C. Marton, editors, *Advances in Electronics and Electron Physics*, volume 53, pages 85–152. Academic Press, January 1980.
- [297] C.M. Furse. Faster than Fourier: Ultra-efficient time-to-frequency-domain conversions for FDTD simulations. *IEEE Antennas and Propagation Magazine*, 42(6):24–34, December 2000.
- [298] V. F. Fusco. Series feedback integrated active microstrip antenna synthesis and characterisation. *Electronics Letters*, 28(1):89–91, January 1992.
- [299] Karin Gallandat and Daniele Lantagne. Selection of a Biosafety Level 1 (BSL-1) surrogate to evaluate surface disinfection efficacy in Ebola outbreaks: Comparison of four bacteriophages. *PLoS ONE*, 12(5), May 2017.
- [300] Ramesh Garg. Design equations for coupled microstrip lines. *International Journal of Electronics*, 47(6):587–591, December 1979.
- [301] Marek Gasior and Ralph Steinhagen. High Resolution Beam Orbit Measurement Electronics based on Compensated Diode Detectors. July 2020.
- [302] Philippe Gautret, Jean-Christophe Lagier, Philippe Parola, Van Thuan Hoang, Line Meddeb, Morgane Mailhe, Barbara Doudier, Johan Courjon, Valérie Giordanengo, Vera Esteves Vieira, Hervé Tissot Dupont, Stéphane Honoré, Philippe Colson, Eric Chabrière, Bernard La Scola, Jean-Marc Rolain, Philippe Brouqui, and Didier Raoult. Hydroxychloroquine and azithromycin as a treatment of COVID-19: Results of an open-label non-randomized clinical trial. *International Journal of Antimicrobial Agents*, page 105949, March 2020.
- [303] Joshua Geleris, Yifei Sun, Jonathan Platt, Jason Zucker, Matthew Baldwin, George Hripcsak, Angelena Labella, Daniel K. Manson, Christine Kubin, R. Graham Barr, Magdalena E. Sobieszczyk, and Neil W. Schluger. Observational Study of Hydroxychloroquine in Hospitalized Patients with Covid-19. *New England Journal of Medicine*, 0(0):null, May 2020.
- [304] J. Ghosh and J. S. Roy. Design of a Wideband Microstrip Antenna. *Journal of Electromagnetic Waves and Applications*, 22(17-18):2379–2389, January 2008.
- [305] David Gillett and Alan Marchiori. A Low-Cost Continuous Turbidity Monitor. *Sensors (Basel, Switzerland)*, 19(14), July 2019.
- [306] R.J. Gilmore and F.J. Rosenbaum. An Analytic Approach to Optimum Oscillator Design Using S-Parameters. *IEEE Transactions on Microwave Theory and Techniques*, 31(8):633–639, August 1983.

- [307] Joel Goergen. A Definition of FR-4. page 16, 2004.
- [308] M. A. Goldberg, V. L. Salerno, and M. A. Sadowsky. Stress Distribution in a Rotating Spherical Shell of Arbitrary Thickness. *Journal of Applied Mechanics*, 28(1):127–131, March 1961.
- [309] Robert Gorkin, Liviu Clime, Marc Madou, and Horacio Kido. Pneumatic pumping in centrifugal microfluidic platforms. *Microfluidics and Nanofluidics*, 9(2):541–549, August 2010.
- [310] Innovation Government of Canada. RSS-102 — Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2015.
- [311] A. V. Grebennikov and V. V. Nikiforov. An analytic method of microwave transistor oscillator design. *International Journal of Electronics*, 83(6):849–858, December 1997.
- [312] Andrei Grebennikov. *RF and Microwave Transistor Oscillator Design*. John Wiley & Sons, Ltd, Chichester, UK, April 2007.
- [313] Andrei Grebennikov. *RF and Microwave Transmitter Design*. July 2011.
- [314] F. T. Groves. A method of preparing oxygen. *Journal of Chemical Education*, 28(6):331, June 1951.
- [315] W. Grundler and F. Keilmann. Sharp Resonances in Yeast Growth Prove Nonthermal Sensitivity to Microwaves. *Physical Review Letters*, 51(13):1214–1216, September 1983.
- [316] T Grzebyk, P Knapkiewicz, P Szyszka, A Gorecka-Drzazga, and J A Dziuban. MEMS ion-sorption high vacuum pump. *Journal of Physics: Conference Series*, 773:012047, November 2016.
- [317] Tomasz Grzebyk, Anna Górecka-Drzazga, and Jan A. Dziuban. Low vacuum MEMS Ion-sorption Micropump. *Procedia Engineering*, 168:1593–1596, 2016.
- [318] Juyi Guo, Xilin Wang, Zhidong Jia, Jun Wang, and Chuan Chen. Nonlinear Electrical Properties and Field Dependency of BST and Nano-ZnO-Doped Silicone Rubber Composites. *Molecules*, 23(12), November 2018.
- [319] Manish Gupta and Richard N. Zare. Spinning molecules to bits. *Nature*, 407(6800):33–34, September 2000.
- [320] Jonathan B Hacker, Michael P DeLisio, Moonil Kim, Cheh-Ming Liu, Shi-Jie Li, Scott W Wedge, and David B Rutledge. A IO-Watt X-Band Grid Oscillator. page 4.
- [321] Julia Hadar, Tsvi Tirosh, Ora Grafstein, and Evgeny Korabelnikov. Autoclave Emissions—Hazardous or Not. *Journal of the American Biological Safety Association*, 2(3):44–51, September 1997.
- [322] Roy Hadfield. Rotational Analogies for Viscous Drag. page 4.
- [323] P.S. Hall. Analysis of radiation from active microstrip antennas. *IEE Proceedings - Microwaves, Antennas and Propagation*, 141(5):359, 1994.
- [324] Professor John Starr Hamel. LC Tank Voltage Controlled Oscillator Tutorial. page 51.
- [325] Bassel Hanafi. Design of Silicon Power Amplifiers and Arrays for Millimeter Wave Applications. page 133, 2014.
- [326] J. W. Hand. Physical techniques for delivering microwave energy to tissues. *The British Journal of Cancer. Supplement*, 5:9–15, March 1982.
- [327] R. Hansen. Focal region characteristics of focused array antennas. *IEEE Transactions on Antennas and Propagation*, 33(12):1328–1337, December 1985.
- [328] Lennart Hardell. World Health Organization, radiofrequency radiation and health - a hard nut to crack (Review). *International Journal of Oncology*, 51(2):405–413, June 2017.
- [329] Darrell Harmon. Microwave Design with KiCad and OpenEMS. page 27.
- [330] A. Harris, G. Cardone, D. C. Winkler, J. B. Heymann, M. Brecher, J. M. White, and A. C. Steven. Influenza virus pleiomorphy characterized by cryoelectron tomography. *Proceedings of the National Academy of Sciences*, 103(50):19123–19127, December 2006.
- [331] Rick Hartley. Base Materials for High Speed, High Frequency PC Boards. page 33.
- [332] Rick Hartley. RF / Microwave PC Board Design and Layout. page 64.

- [333] Marika Hayashi, Kara L. Feilich, and David J. Ellerby. The mechanics of explosive seed dispersal in orange jewelweed (*Impatiens capensis*). *Journal of Experimental Botany*, 60(7):2045–2053, May 2009.
- [334] G. J. Hayes, Ju-Hee So, A. Qusba, M. D. Dickey, and G. Lazzi. Flexible Liquid Metal Alloy (EGaIn) Microstrip Patch Antenna. *IEEE Transactions on Antennas and Propagation*, 60(5):2151–2156, May 2012.
- [335] Garrett J. Hayes and Bruce M. Clemens. Laser liftoff of gallium arsenide thin films. *MRS Communications*, 5(1):1–5, March 2015.
- [336] Mang He, Xihong Ye, Pingyuan Zhou, Guoqiang Zhao, Chuanfang Zhang, and Houjun Sun. A Small-Size Dual-Feed Broadband Circularly Polarized U-Slot Patch Antenna. *IEEE Antennas and Wireless Propagation Letters*, 14:898–901, 2015.
- [337] Government of Canada Health Canada. ePATHogen - Risk Group Database, March 2018.
- [338] W. R. Hedrick and D. L. Hykes. Beam Steering and Focusing With Linear Phased Arrays. *Journal of Diagnostic Medical Sonography*, 12(5):211–215, September 1996.
- [339] Michael H. Heggeness, P.R. Smith, Ismo Ulmanen, Robert M. Krug, and Purnell W. Choppin. Studies on the helical nucleocapsid of influenza virus. *Virology*, 118(2):466–470, April 1982.
- [340] Teruhisa Hirai, Kaoru Mitsuoka, Akinori Kidera, and Yoshinori Fujiyoshi. Simulation of charge effects on density maps obtained by high-resolution electron crystallography. *Journal of Electron Microscopy*, 56(4):131–140, August 2007.
- [341] Ryohei Hirose, Takaaki Nakaya, Yuji Naito, Tomo Daidoji, Yohei Watanabe, Hiroaki Yasuda, Hideyuki Konishi, and Yoshito Itoh. Viscosity is an important factor of resistance to alcohol-based disinfectants by pathogens present in mucus. *Scientific Reports*, 7(1):13186, October 2017.
- [342] Jiri Hlina, Karel Hromadka, Jan Reboun, Martin Hirman, and Ales Hamacek. Adhesion improvement of Thick Printed Copper film on alumina substrates by controlling of oxygen level in furnace. In *2016 39th International Spring Seminar on Electronics Technology (ISSE)*, pages 22–26, May 2016.
- [343] Alex S. Holehouse, Rahul K. Das, James N. Ahad, Mary O. G. Richardson, and Rohit V. Pappu. CIDER: Resources to Analyze Sequence-Ensemble Relationships of Intrinsically Disordered Proteins. *Biophysical Journal*, 112(1):16–21, January 2017.
- [344] L Holland. Theory and design of getter-ion pumps. *Journal of Scientific Instruments*, 36(3):105–116, March 1959.
- [345] K. A. Holsapple. Spinning rods, elliptical disks and solid ellipsoidal bodies: Elastic and plastic stresses and limit spins. *International Journal of Non-Linear Mechanics*, 43(8):733–742, October 2008.
- [346] Holger Homann and Francois Laenen. SoAx: A generic C++ Structure of Arrays for handling Particles in HPC Codes. *Computer Physics Communications*, 224:325–332, March 2018.
- [347] Bo Hong, Peng Xue, Yafeng Wu, Jingnan Bao, Yon Jin Chuah, and Yuejun Kang. A concentration gradient generator on a paper-based microfluidic chip coupled with cell culture microarray for high-throughput drug screening. *Biomedical Microdevices*, 18(1):21, February 2016.
- [348] Hsin-Hsiang Su, Chih-Wen Kuo, and Toshihide Kitazawa. A Novel Approach for Modeling Diodes Without Reducing the Time Step in the FDTD Method. *IEEE Transactions on Components, Packaging and Manufacturing Technology*, 3(9):1506–1511, September 2013.
- [349] Chih-Ming Hu and Robert Zwanzig. Rotational friction coefficients for spheroids with the slipping boundary condition. *The Journal of Chemical Physics*, 60(11):4354–4357, June 1974.
- [350] Hua Quen Tserng and H.M. Macksey. Wide-Band Varactor-Tuned GaAs MESFET Oscillators at X- and Ku-Bands. In *MTT-S International Microwave Symposium Digest*, volume 77, pages 267–269, San Diego, CA, USA, 1977. MTT005.
- [351] Luo Hui, Li Weiping, and Hu Rong. The Precise Design of Bandpass Filter Miniaturization Using Microstrip SIR. In Gary Lee, editor, *Advances in Intelligent Systems*, volume 138, pages 263–269. Springer Berlin Heidelberg, Berlin, Heidelberg, 2012.

- [352] Rachel L. Hulkower, Lisa M. Casanova, William A. Rutala, David J. Weber, and Mark D. Sobsey. Inactivation of surrogate coronaviruses on hard surfaces by health care germicides. *American Journal of Infection Control*, 39(5):401–407, June 2011.
- [353] Sean Victor Hum. Antenna Arrays. *Antenna Arrays*, page 18.
- [354] Wan-Ting Hung, Jen-Jung Tung, and Shih-Yuan Chen. A focusing reflectarray and its application in microwave virus sanitizer: Focusing Reflectarray. *Radio Science*, 49(10):890–898, October 2014.
- [355] Ian Hunter. *Theory and Design of Microwave Filters*. IET, The Institution of Engineering and Technology, Michael Faraday House, Six Hills Way, Stevenage SG1 2AY, UK, January 2001.
- [356] I.C. Hunter and J.D. Rhodes. Electronically Tunable Microwave Bandpass Filters. *IEEE Transactions on Microwave Theory and Techniques*, 30(9):1354–1360, 1982.
- [357] T. Huynh and K.-F. Lee. Single-layer single-patch wideband microstrip antenna. *Electronics Letters*, 31(16):1310–1312, August 1995.
- [358] Paul Hyman. Phages for Phage Therapy: Isolation, Characterization, and Host Range Breadth. *Pharmaceuticals*, 12(1), March 2019.
- [359] Fatimah Ibrahim, Peyman Jahanshahi, Noorsaadah Abd Rahman, Maria Kahar Bador Abdul Kahar, Marc Madou, Ali A. Nozari, Norhayati Soin, Siti Zawiah Md Dawal, and Kameel Abi Samra. Analysis and experiment of centrifugal force for microfluidic ELISA CD platform. In *2010 IEEE EMBS Conference on Biomedical Engineering and Sciences (IECBES)*, pages 466–470, Kuala Lumpur, Malaysia, November 2010. IEEE.
- [360] I.J. Induja, K.P. Surendran, M.R. Varma, and M.T. Sebastian. Low  $\kappa$ , low loss alumina-glass composite with low CTE for LTCC microelectronic applications. *Ceramics International*, 43(1):736–740, January 2017.
- [361] Institute of Electrical and Electronics Engineers. *IEEE C95.1-2005*. Institute of Electrical and Electronics Engineers, New York, 2006.
- [362] International Commission on Non-Ionizing Radiation Protection (ICNIRP)1. ICNIRP GUIDELINES 2020. *Health Physics*, 118(5):483–524, May 2020.
- [363] C Inyeo and P Wattanakasiwich. Pencil on paper as low cost alternative resistors. *Journal of Physics: Conference Series*, 1144:012165, December 2018.
- [364] Pavlina T. Ivanova, David S. Myers, Stephen B. Milne, Jennifer L. McClaren, Paul G. Thomas, and H. Alex Brown. Lipid composition of viral envelope of three strains of influenza virus – not all viruses are created equal. *ACS infectious diseases*, 1(9):399–452, September 2015.
- [365] I. L. Ivanovska, P. J. de Pablo, B. Ibarra, G. Sgalari, F. C. MacKintosh, J. L. Carrascosa, C. F. Schmidt, and G. J. L. Wuite. Bacteriophage capsids: Tough nanoshells with complex elastic properties. *Proceedings of the National Academy of Sciences*, 101(20):7600–7605, May 2004.
- [366] David R. Jackson and Nicolaos G. Alexopoulos. *Communications Simple Approximate Formulas for Input Resistance, Bandwidth, and Efficiency of a Resonant Rectangular Patch*.
- [367] A. Jacob and R. Knochel. Broad-Band Tunable GaAs-FET Oscillator with Hybrid-Coupled Microstrip and Evanescent-Mode Resonators. In *1980 10th European Microwave Conference*, pages 709–713, September 1980.
- [368] D.S. James, G.R. Painchaud, and W.J.R. Hoefer. Aperture Coupling Between Microstrip and Resonant Cavities. *IEEE Transactions on Microwave Theory and Techniques*, 25(5):392–396, May 1977.
- [369] G Janeschitz. Plasma-wall interaction issues in ITER. *Journal of Nuclear Materials*, 290-293:1–11, March 2001.
- [370] P. Jankowski and P. Garstecki. Stable hydrophilic surface of polycarbonate. *Sensors and Actuators B: Chemical*, 226:151–155, April 2016.
- [371] Jihak Jung, Wooyoung Choi, and Jaehoon Choi. A small wideband microstrip-fed monopole antenna. *IEEE Microwave and Wireless Components Letters*, 15(10):703–705, October 2005.
- [372] Ted Johansson and Jonas Fritzén. A Review of Watt-Level CMOS RF Power Amplifiers. *IEEE Transactions on Microwave Theory and Techniques*, 62(1):111–124, January 2014.

- [373] K.M. Johnson. Large Signal GaAs MESFET Oscillator Design. *IEEE Transactions on Microwave Theory and Techniques*, 27(3):217–227, March 1979.
- [374] Jose Schutt-Aine. Coupled Transmission Lines.
- [375] Jukka Juutilainen, Anne Höytö, Timo Kumlin, and Jonne Naarala. Review of possible modulation-dependent biological effects of radiofrequency fields. *Bioelectromagnetics*, 32(7):511–534, 2011.
- [376] Yoshitsugu Kamimura, Ken-ichi Saito, Toshikazu Saiga, and Yoshifumi Amemiya. Effect of 2.45GHz Microwave Irradiation on Monkey Eyes. *IEICE TRANSACTIONS on Communications*, E77-B(6):762–765, June 1994.
- [377] Bongchul Kang, Seungyong Han, Jongsu Kim, Seunghwan Ko, and Minyang Yang. One-Step Fabrication of Copper Electrode by Laser-Induced Direct Local Reduction and Agglomeration of Copper Oxide Nanoparticle. *The Journal of Physical Chemistry C*, 115(48):23664–23670, December 2011.
- [378] Byoungjoong Kang, Sung-Gi Yang, Jinhyuck Yu, Woosung Choo, and Byeong-Ha Park. Design and analysis of a high-performance cascode bipolar low noise amplifier with shunt feedback capacitor. In *2008 IEEE Radio Frequency Integrated Circuits Symposium*, pages 613–616, June 2008.
- [379] Byoungjoong Kang, Jinhyuck Yu, Heeseon Shin, Sangsoo Ko, Won Ko, Sung-Gi Yang, Woosung Choo, and Byeong-Ha Park. Design and Analysis of a Cascode Bipolar Low-Noise Amplifier With Capacitive Shunt Feedback Under Power-Constraint. *IEEE Transactions on Microwave Theory and Techniques*, 59(6):1539–1551, June 2011.
- [380] B Kapilevich. A varactor-tunable filter with constant bandwidth and loss compensation.
- [381] B. Kapilevich and R. Lukjanets. Design, analysis and optimization of varactor tunable microstrip filter for wireless applications. In *Proceedings of the IEEE - Russia Conference. 1999 High Power Microwave Electronics: Measurements, Identification, Applications. MIA-ME'99 (Cat. No.99EX289)*, pages II13–II16, Novosibirsk, Russia, 1999. Novosibirsk State Tech. Univ.
- [382] B. Kapilevich and R. Lukjanets. Optimization of varactor tunable microstrip resonators for wireless applications. In *Proceedings of the IEEE - Russia Conference. 1999 High Power Microwave Electronics: Measurements, Identification, Applications. MIA-ME'99 (Cat. No.99EX289)*, pages II60–II67, Novosibirsk, Russia, 1999. Novosibirsk State Tech. Univ.
- [383] Boris Kapilevich and Roman Lukyanets. Modeling Varactor Tunable Microstrip Resonators for Wireless Applications. page 9.
- [384] Emin Karaca, Burak Durmaz, Huseyin Altug, Teoman Yildiz, Candan Guducu, Melis Irgi, Mehtap Gulcihan Cinar Koksall, Ferda Ozkinay, Cumhur Gunduz, and Ozgur Cogulu. The genotoxic effect of radiofrequency waves on mouse brain. *Journal of Neuro-Oncology*, 106(1):53–58, January 2012.
- [385] S. Karlin and V. Brendel. Charge configurations in viral proteins. *Proceedings of the National Academy of Sciences*, 85(24):9396–9400, December 1988.
- [386] C. Karnfelt, P. Hallbjörner, H. Zirath, P. Ligander, K. Boustedt, and A. Alping. High gain active microstrip antenna for 60 GHz WLAN. In *2005 European Microwave Conference*, page 4 pp., Paris, France, 2005. IEEE.
- [387] Vishal Kesari, B. N Basu, Institute of Physics (Grande-Bretagne), and Morgan & Claypool Publishers. *High Power Microwave Tubes: Basics and Trends. Volumes 1-2 Volumes 1-2*. 2018.
- [388] Afsaneh Keshavarz and Zohreh Vafapour. Sensing Avian Influenza Viruses Using Terahertz Metamaterial Reflector. *IEEE Sensors Journal*, 19(13):5161–5166, July 2019.
- [389] Eric M. Kettleson, Bala Ramaswami, Christopher J. Hogan, Myong-Hwa Lee, Gennadiy A. Statyukha, Pratim Biswas, and Largus T. Angenent. Airborne Virus Capture and Inactivation by an Electrostatic Particle Collector. *Environmental Science & Technology*, 43(15):5940–5946, August 2009.
- [390] S Khadanga and S Ahmad. DESIGN AND FABRICATION OF LOW COST MICROWAVE OSCILLATOR.
- [391] PAUL KHANNA. MICROWAVE OSCILLATORS: THE STATE OF THE TECHNOLOGY. page 7.
- [392] B.-W. Kim and S.-W. Yun. Varactor-Tuned Combline Bandpass Filter Using Step-Impedance Microstrip Lines. *IEEE Transactions on Microwave Theory and Techniques*, 52(4):1279–1283, April 2004.

- [393] Nahui Kim, Catherine M. Dempsey, Jim V. Zoval, Ji-Ying Sze, and Marc J. Madou. Automated microfluidic compact disc (CD) cultivation system of *Caenorhabditis elegans*. *Sensors and Actuators B: Chemical*, 122(2):511–518, March 2007.
- [394] Robert W. King. Thermionic Vacuum Tubes and their Applications. *Journal of the Optical Society of America*, 8(1):77, January 1924.
- [395] Ben G.B. Kitchener, Simon D. Dixon, Kieren O. Howarth, Anthony J. Parsons, John Wainwright, Mark D. Bateman, James R. Cooper, Graham K. Hargrave, Edward J. Long, and Caspar J.M. Hewett. A low-cost bench-top research device for turbidity measurement by radially distributed illumination intensity sensing at multiple wavelengths. *HardwareX*, 5:e00052, April 2019.
- [396] G. Klahn. True RMS power detection with high dynamic range. In *1999 IEEE MTT-S International Microwave Symposium Digest (Cat. No.99CH36282)*, volume 4, pages 1773–1776 vol.4, June 1999.
- [397] David W Knight. Diode detectors for RF measurement. *Rectifier circuits*, page 116.
- [398] David W Knight. Impedance and admittance measurement using discrete scalar voltage samples. page 68.
- [399] Konstantin. Improving performance with SIMD intrinsics in three use cases, July 2020.
- [400] Janez Kosel, Ion Gutiérrez-Aguirre, Nejc Rački, Tanja Dreo, Maja Ravnikar, and Matevž Dular. Efficient inactivation of MS-2 virus in water by hydrodynamic cavitation. *Water Research*, 124:465–471, November 2017.
- [401] Lukasz P. Kozlowski. Proteome-pI: Proteome isoelectric point database. *Nucleic Acids Research*, 45(Database issue):D1112–D1116, January 2017.
- [402] Ujjawal Krishnam and Prafulla K. Jha. On detection and annihilation of spherical virus embedded in a fluid matrix at low and moderate Reynolds number. *arXiv:1712.02126 [cond-mat, physics:physics]*, March 2018.
- [403] Henry A. Kues, Lawrence W. Hirst, Gerard A. Luty, Salvatore A. D’Anna, and Gregory R. Dunkelberger. Effects of 2.45-GHz microwaves on primate corneal endothelium. *Bioelectromagnetics*, 6(2):177–188, 1985.
- [404] Vineeta Kumari, Gyanendra Sheoran, and Tirupathiraju Kanumuri. SAR analysis of directive antenna on anatomically real breast phantoms for microwave holography. *Microwave and Optical Technology Letters*, 62(1):466–473, 2020.
- [405] Karl S. Kunz and Raymond J. Luebbers. *The Finite Difference Time Domain Method for Electromagnetics*. Routledge, May 2018.
- [406] Jasmin S Kutter, Monique I Spronken, Pieter L Fraaij, Ron AM Fouchier, and Sander Herfst. Transmission routes of respiratory viruses among humans. *Current Opinion in Virology*, 28:142–151, February 2018.
- [407] Katri Laaksonen, S.-Y. Li, S. R. Puisto, G. A. Niklasson, T. Ala-Nissilä, and R. M. Nieminen. Optical Properties of Thermochromic VO<sub>2</sub> Nanoparticles. In Baldassare Di Bartolo and John Collins, editors, *Nano-Optics for Enhancing Light-Matter Interactions on a Molecular Scale*, pages 419–420. Springer Netherlands, Dordrecht, 2013.
- [408] Raymond H. W. Lam, Min-Cheol Kim, and Todd Thorsen. Culturing Aerobic and Anaerobic Bacteria and Mammalian Cells with a Microfluidic Differential Oxygenator. *Analytical Chemistry*, 81(14):5918–5924, July 2009.
- [409] Leslie Lamport and Stefan Schmid Distributed Computing & Education Column by Juraj Hromkovic. If You’re Not Writing a Program, Don’t Use a Programming Language. *Bulletin of EATCS*, 2(125), June 2018.
- [410] Floris Laporte, Joni Dambre, and Peter Bienstman. Highly parallel simulation and optimization of photonic circuits in time and frequency domain based on the deep-learning framework PyTorch. *Scientific Reports*, 9(1):5918, December 2019.
- [411] M. Latip, Mohd Khairul Mohd Salleh, N. Wahab, and Mustafar Hamzah. Varactor-based frequency-tuned microwave open-circuited stub resonator. *International Conference on Electronic Devices, Systems, and Applications*, pages 22–24, April 2011.
- [412] J. Lee and K. Sarabandi. An Analytic Design Method for Microstrip Tunable Filters. *IEEE Transactions on Microwave Theory and Techniques*, 56(7):1699–1706, July 2008.

- [413] Jeong Woo Lee, Ji-Seon Son, Jin-Wook Choi, Young-Jin Han, and Jun-Rae Lee. The comparison of the lengths and diameters of main bronchi measured from two-dimensional and three-dimensional images in the same patients. *Korean Journal of Anesthesiology*, 66(3):189–194, March 2014.
- [414] Kai Fang Lee, Shing Lung Steven Yang, Ahmed A. Kishk, and Kwai Man Luk. The Versatile U-Slot Patch Antenna. *IEEE Antennas and Propagation Magazine*, 52(1):71–88, February 2010.
- [415] Minjae Lee and Sungjoon Lim. Microfluidic Impedance Tuner. page 2, 2018.
- [416] R. Lehmann, J. C. Severitt, T. Roddelkopf, S. Junginger, and K. Thurow. Biomek Cell Workstation: A Variable System for Automated Cell Cultivation. *Journal of Laboratory Automation*, 21(3):439–450, June 2016.
- [417] Stephan Leuschner, Sandro Pinarello, Uwe Hodel, Jan-Erik Mueller, and Heinrich Klar. A 31-dBm, high ruggedness power amplifier in 65-nm standard CMOS with high-efficiency stacked-cascode stages. In *2010 IEEE Radio Frequency Integrated Circuits Symposium*, pages 395–398, May 2010.
- [418] R. Levy, R.V. Snyder, and G. Matthaei. Design of microwave filters. *IEEE Transactions on Microwave Theory and Techniques*, 50(3):783–793, March 2002.
- [419] George K Lewis, George K Lewis, and William Olbricht. Cost-effective broad-band electrical impedance spectroscopy measurement circuit and signal analysis for piezo-materials and ultrasound transducers. *Measurement Science and Technology*, 19(10):105102, October 2008.
- [420] Keren Li, Daisuke Kurita, and Toshiaki Matsui. An Ultra-Wideband Bandpass Filter Using Broadside-Coupled Microstrip-Coplanar Waveguide Structure. page 5.
- [421] Liang Li. Radiation noise source modeling and near-field coupling estimation in RF interference. page 77.
- [422] Sai Li, Frederic Eghiaian, Christian Sieben, Andreas Herrmann, and Iwan A.T. Schaap. Bending and Puncturing the Influenza Lipid Envelope. *Biophysical Journal*, 100(3):637–645, February 2011.
- [423] Siyu Li, Gonca Erdemci-Tandogan, Jef Wagner, Paul van der Schoot, and Roya Zandi. Impact of a non-uniform charge distribution on virus assembly. *Physical Review E*, 96(2):022401, August 2017.
- [424] Wangzhe Li, Student Member, Jianping Yao, and Senior Member. An Optically Tunable Optoelectronic Oscillator. *IEEE J. Lightw. Technol.*, pages 2640–2645, 2010.
- [425] P. Liao and R.A. York. A 1 watt X-band power combining array using coupled VCOs. In *1994 IEEE MTT-S International Microwave Symposium Digest (Cat. No.94CH3389-4)*, pages 1235–1238, San Diego, CA, USA, 1994. IEEE.
- [426] P. Liao and R.A. York. A varactor-tuned patch oscillator for active arrays. *IEEE Microwave and Guided Wave Letters*, 4(10):335–337, October 1994.
- [427] Thorsten Liebig. openEMS - Open Electromagnetic Field Solver.
- [428] Antonio Liga, Jonathan A. S. Morton, and Maïwenn Kersaudy-Kerhoas. Safe and cost-effective rapid-prototyping of multilayer PMMA microfluidic devices. *Microfluidics and Nanofluidics*, 20(12):164, November 2016.
- [429] Jenshan Lin, Siou Teck Chew, and Tatsuo Itoh. A unilateral injection-locking type active phased array for beam scanning. In *1994 IEEE MTT-S International Microwave Symposium Digest (Cat. No.94CH3389-4)*, pages 1231–1234 vol.2, May 1994.
- [430] Chuang Liu, Yang Yang, Yuanzhu Gao, Chenguang Shen, Bin Ju, Congcong Liu, Xian Tang, Jinli Wei, Xiaomin Ma, Weilong Liu, Shuman Xu, Yingxia Liu, Jing Yuan, Jing Wu, Zheng Liu, Zheng Zhang, Peiyi Wang, and Lei Liu. Viral Architecture of SARS-CoV-2 with Post-Fusion Spike Revealed by Cryo-EM. Preprint, Microbiology, March 2020.
- [431] Moli Liu, Yiqun Lin, and Shengjun Lu. Design of Ultra Wide Octave Electrically Tunable Bandpass Filter for Wireless Communication. In *Proceedings of the 2nd International Conference on Telecommunications and Communication Engineering - ICTCE 2018*, pages 280–284, Beijing, China, 2018. ACM Press.
- [432] Tzu-Ming Liu, Hung-Ping Chen, Li-Tzu Wang, Jen-Ren Wang, Tang-Nian Luo, Yi-Jan Chen, Shen-Iuan Liu, and Chi-Kuang Sun. Microwave resonant absorption of viruses through dipolar coupling with confined acoustic vibrations. *Applied Physics Letters*, 94(4):043902, January 2009.



- [433] Anže Lošdorfer Božič, Antonio Šiber, and Rudolf Podgornik. How simple can a model of an empty viral capsid be? Charge distributions in viral capsids. *Journal of Biological Physics*, 38(4):657–671, September 2012.
- [434] R. Luebbers. Lossy dielectrics in FDTD. *IEEE Transactions on Antennas and Propagation*, 41(11):1586–1588, Nov./1993.
- [435] R. Luebbers, L. Chen, T. Uno, and S. Adachi. FDTD calculation of radiation patterns, impedance, and gain for a monopole antenna on a conducting box. *IEEE Transactions on Antennas and Propagation*, 40(12):1577–1583, Dec./1992.
- [436] Raymond Luebbers and Karl Kunz. Finite difference time domain calculations of antenna mutual coupling. *IEEE Transactions on Electromagnetic Compatibility*, 34(3):357–359, 1991.
- [437] R.J. Luebbers and J. Beggs. FDTD calculation of wide-band antenna gain and efficiency. *IEEE Transactions on Antennas and Propagation*, 40(11):1403–1407, November 1992.
- [438] R.J. Luebbers and H.S. Langdon. A simple feed model that reduces time steps needed for FDTD antenna and microstrip calculations. *IEEE Transactions on Antennas and Propagation*, 44(7):1000–1005, July 1996.
- [439] K.M. Luk, K.F. Tong, S.M. Shum, K.F. Lee, and R.Q. Lee. FDTD analysis of U-slot rectangular patch antenna. In *IEEE Antennas and Propagation Society International Symposium 1997. Digest*, volume 4, pages 2111–2114 vol.4, July 1997.
- [440] M. Makimoto and M. Sagawa. Varactor Tuned Bandpass Filters Using Microstrip-Line Ring Resonators. In *1986 IEEE MTT-S International Microwave Symposium Digest*, pages 411–414, June 1986.
- [441] Ewa Manikowska, J. M. Luciani, B. Servantie, P. Czerski, Jeanine Obrenovitch, and A. Stahl. Effects of 9.4 GHz microwave exposure on meiosis in mice. *Experientia*, 35(3):388–390, March 1979.
- [442] Sari Mäntynen, Lotta-Riina Sundberg, Hanna M. Oksanen, and Minna M. Poranen. Half a Century of Research on Membrane-Containing Bacteriophages: Bringing New Concepts to Modern Virology. *Viruses*, 11(1), January 2019.
- [443] Xavier Marchand-Senécal, Rob Kozak, Samira Mubareka, Natasha Salt, Jonathan B Gubbay, Alireza Eshaghi, Vanessa Allen, Yan Li, Natalie Bastien, Matthew Gilmour, Omar Ozaldin, and Jerome A Leis. Diagnosis and Management of First Case of COVID-19 in Canada: Lessons applied from SARS. *Clinical Infectious Diseases*, page ciaa227, March 2020.
- [444] M Marchetti, Gjl Wuite, and Wh Roos. Atomic force microscopy observation and characterization of single virions and virus-like particles by nano-indentation. *Current Opinion in Virology*, 18:82–88, June 2016.
- [445] James Raley Marek. AN INVESTIGATION OF A DESIGN FOR A FINITE-DIFFERENCE TIME DOMAIN (FDTD) HARDWARE ACCELERATOR THESIS. page 119.
- [446] Jan K. Marzinek, Daniel A. Holdbrook, Roland G. Huber, Chandra Verma, and Peter J. Bond. Pushing the Envelope: Dengue Viral Membrane Coaxed into Shape by Molecular Simulations. *Structure*, 24(8):1410–1420, August 2016.
- [447] Jackson W. Massey and Ali E. Yilmaz. AustinMan and AustinWoman: High-fidelity, anatomical voxel models developed from the VHP color images. In *2016 38th Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC)*, pages 3346–3349, August 2016.
- [448] Paul S. Masters. The Molecular Biology of Coronaviruses. In *Advances in Virus Research*, volume 66, pages 193–292. Academic Press, January 2006.
- [449] Haim Mazar. EMF, New ICNIRP Guidelines and IEEE C95.1-2019 Standard: Differences and Similarities. December 2019.
- [450] L. E. McDaniel, E. G. Bailey, and A. Zimmerli. Effect of Oxygen-Supply Rates on Growth of Escherichia coli. *Applied Microbiology*, 13(1):109–114, January 1965.
- [451] Rafael H Medina-Sanchez. BEAM STEERING CONTROL SYSTEM FOR LOW-COST PHASED ARRAY WEATHER RADARS: DESIGN AND CALIBRATION TECHNIQUES. page 220.
- [452] A. Megej and V. F. Fusco. *Low-Loss Analog Phase Shifter Using Varactor Diodes*. 1998.
- [453] Parikha Mehrotra, Baibhab Chatterjee, and Shreyas Sen. EM-Wave Biosensors: A Review of RF, Microwave, mm-Wave and Optical Sensing. *Sensors*, 19(5):1013, January 2019.

- [454] M.B. Mejri, H. Baccar, E. Baldrich, F.J. Del Campo, S. Helali, T. Ktari, A. Simonian, M. Aouni, and A. Abdelghani. Impedance biosensing using phages for bacteria detection: Generation of dual signals as the clue for in-chip assay confirmation. *Biosensors and Bioelectronics*, 26(4):1261–1267, December 2010.
- [455] Ali Mekadmini, Noham Martin, Paul Laurent, and Gérard Tanné. Center frequency and bandwidth tunable compact SIR bandpass filter. In *2013 European Microwave Conference*, pages 1019–1022, October 2013.
- [456] B. Michen and T. Graule. Isoelectric points of viruses. *Journal of Applied Microbiology*, 109(2):388–397, August 2010.
- [457] Jacqueline L. S. Milne, Mario J. Borgnia, Alberto Bartesaghi, Erin E. H. Tran, Lesley A. Earl, David M. Schauder, Jeffrey Lengyel, Jason Pierson, Ardan Patwardhan, and Sriram Subramaniam. Cryo-electron microscopy - a primer for the non-microscopist. *FEBS Journal*, 280(1):28–45, January 2013.
- [458] U.K. Mishra and Wei-Nan Jiang. Planar cold cathodes. In *Proceedings of IEEE/Cornell Conference on Advanced Concepts in High Speed Semiconductor Devices and Circuits*, pages 279–289, Ithaca, NY, USA, 1993. IEEE.
- [459] Jason Mix, Jonathan Dixon, Zoya Popovic, and Melinda Piket-May. Incorporating non-linear lumped elements in FDTD: The equivalent source method. page 14, 1999.
- [460] Sei Mizojiri and Kohei Shimamura. Wireless Power Transfer via Subterahertz-Wave. *Applied Sciences*, 8(12):2653, December 2018.
- [461] Thomas R. Moench, Tsungai Chipato, and Nancy S. Padian. Preventing disease by protecting the cervix: The unexplored promise of internal vaginal barrier devices. *AIDS*, 15(13):1595–1602, September 2001.
- [462] Mahdi Mohammadi, David J. Kinahan, and Jens Ducr  e. Lumped-Element Modeling for Rapid Design and Simulation of Digital Centrifugal Microfluidic Systems. *Lab-on-a-Chip Fabrication and Application*, June 2016.
- [463] Avijit Mondal, Dinesh Agrawal, and Anish Upadhyaya. MICROWAVE HEATING OF PURE COPPER POWDER WITH DIFFERENT PARTICLE SIZE AND POROSITY. page 4.
- [464] M Montaudon, P Desbarats, P Berger, G de Dietrich, R Marthan, and F Laurent. Assessment of bronchial wall thickness and lumen diameter in human adults using multi-detector computed tomography: Comparison with theoretical models. *Journal of Anatomy*, 211(5):579–588, November 2007.
- [465] Carl H. Mueller, Richard Q. Lee, Robert R. Romanofsky, Carol L. Kory, Kevin M. Lambert, Frederick W. Van Keuls, and F  lix A. Miranda. Small-Size X-Band Active Integrated Antenna With Feedback Loop. *IEEE Transactions on Antennas and Propagation*, 56(5):1236–1241, May 2008.
- [466] Robert Munson. Microstrip phased array antennas. In *1973 EIC 11th Electrical Insulation Conference*, pages 281–283, September 1973.
- [467] Christopher G. Myers and B. Montgomery Pettitt. Communication: Origin of the contributions to DNA structure in phages. *The Journal of Chemical Physics*, 138(7), February 2013.
- [468] Rikkert J. Nap, An  e Lo  dorfer Bo  i  , Igal Szleifer, and Rudolf Podgornik. The Role of Solution Conditions in the Bacteriophage PP7 Capsid Charge Regulation. *Biophysical Journal*, 107(8):1970–1979, October 2014.
- [469] Arvind Narayanan and Vitaly Shmatikov. How To Break Anonymity of the Netflix Prize Dataset. *arXiv:cs/0610105*, November 2007.
- [470] Y Natsume and H Sakata. Zinc oxide films prepared by sol-gel spin-coating. *Thin Solid Films*, 372(1):30–36, September 2000.
- [471] Payam Nayeri, Atef Z. Elsherbeni, and Randy Haupt. Phased array antenna limitations for ultra-wideband focusing. In *2014 IEEE Conference on Antenna Measurements & Applications (CAMA)*, pages 1–3, Antibes Juan-les-Pins, France, November 2014. IEEE.
- [472] Chris Newcombe, Tim Rath, Fan Zhang, Bogdan Munteanu, Marc Brooker, and Michael Deardeuff. How Amazon web services uses formal methods. *Communications of the ACM*, 58(4):66–73, March 2015.
- [473] Nicholls. Pathological Clues to How the SARS Virus Kills. *PLoS Medicine*, 3(2), February 2006.

- [474] Hidekazu Nishimura, Soichiro Sakata, and Akikazu Kaga. A New Methodology for Studying Dynamics of Aerosol Particles in Sneeze and Cough Using a Digital High-Vision, High-Speed Video System and Vector Analyses. *PLoS ONE*, 8(11):e80244, November 2013.
- [475] Martin Norling, Dan Kuylenstierna, Andrei Vorobiev, and Spartak Gevorgian. Layout Optimization of Small-Size Ferroelectric Parallel-Plate Varactors. *IEEE Transactions on Microwave Theory and Techniques*, 58(6):1475–1484, June 2010.
- [476] S. Oberoi, K. S. Daya, and P. S. Tirumalai. Microwave sensor for detection of E. coli in water. In *2012 Sixth International Conference on Sensing Technology (ICST)*, pages 614–617, Kolkata, December 2012. IEEE.
- [477] Gerald Oberschmidt. Tutorial on Design Amplifiers based on S-Parameter Simulation. page 19.
- [478] Robert O’Connor and Lorraine O’Driscoll. Setting up a Cell Culture Laboratory. page 7.
- [479] D Orban and G J K Moernaut. The Basics of Patch Antennas, Updated. page 20, 2009.
- [480] John M Osepchuk and Ronald C Petersen. Safety standards for exposure to RF electromagnetic fields. *IEEE Microwave Magazine*, 2(2):57–69, 2001.
- [481] J. S. Oxford, T. Corcoran, and A. L. Hugentobler. Quantitative analysis of the protein composition of influenza A and B viruses using high resolution SDS polyacrylamide gels. *Journal of Biological Standardization*, 9(4):483–491, October 1981.
- [482] Pere Pala-Schonwalder. 1 Simple Transmission Line in the Time Domain. page 10.
- [483] Vamsi Krishna Palukuru, Jani Peräntie, Jyri Jäntti, and Heli Jantunen. Tunable Microwave Phase Shifters Using LTCC Technology with Integrated BST Thick Films. *International Journal of Applied Ceramic Technology*, 9(1):11–17, January 2012.
- [484] S. A. Palumbo, J. M. Berry, and L. D. Witter. Culture aeration in a polythermostat. *Applied Microbiology*, 15(1):114–116, January 1967.
- [485] Daniel Patko, Zsolt Mártonfalvi, Boglarka Kovacs, Ferenc Vonderviszt, Miklós Kellermayer, and Robert Horvath. Microfluidic channels laser-cut in thin double-sided tapes: Cost-effective biocompatible fluidics in minutes from design to final integration with optical biochips. *Sensors and Actuators B: Chemical*, 196:352–356, June 2014.
- [486] Fernando Patolsky, Gengfeng Zheng, Oliver Hayden, Melike Lakadamyali, Xiaowei Zhuang, and Charles M. Lieber. Electrical detection of single viruses. *Proceedings of the National Academy of Sciences*, 101(39):14017–14022, September 2004.
- [487] Edward E Penhoet. The Structure and Synthesis of Influenza Virus Phosphoproteins. page 9.
- [488] C.W. Penney and R.J. Luebbers. Input impedance, radiation pattern, and radar cross section of spiral antennas using FDTD. *IEEE Transactions on Antennas and Propagation*, 42(9):1328–1332, September 1994.
- [489] D.F. Peterson. Varactor Properties for Wide-Band Linear-Tuning Microwave VCO’s. *IEEE Transactions on Microwave Theory and Techniques*, 28(2):110–119, February 1980.
- [490] Pierre. Appendix D Network Synthesis Using the Transfer Matrix. In *Microwave Amplifier and Active Circuit Design Using the Real Frequency Technique*, pages 253–270. John Wiley & Sons, Ltd, 2016.
- [491] V. Pleskachev and I. Vendik. Tunable microwave filters based on ferroelectric capacitors. In *15th International Conference on Microwaves, Radar and Wireless Communications (IEEE Cat. No.04EX824)*, pages 1039–1043, Warsaw, Poland, 2004. IEEE.
- [492] Clive Poole and Izzat Darwazeh. Lecture 15 - Microwave Oscillator Design - Microwave Active Circuit Analysis and Design. page 55.
- [493] M. L. Privalsky and E. E. Penhoet. Influenza virus proteins: Identity, synthesis, and modification analyzed by two-dimensional gel electrophoresis. *Proceedings of the National Academy of Sciences*, 75(8):3625–3629, August 1978.
- [494] M. Prudenziati and J. Hormadaly. Technologies for printed films. In *Printed Films*, pages 3–29. Elsevier, 2012.

- [495] Aaron J. Prussin, David Otto Schwake, Kaisen Lin, Daniel L. Gallagher, Lauren Buttlng, and Linsey C. Marr. Survival of the Enveloped Virus Phi6 in Droplets as a Function of Relative Humidity, Absolute Humidity, and Temperature. *Applied and Environmental Microbiology*, 84(12), June 2018.
- [496] E'de Qin. A complete sequence and comparative analysis of a SARS-associated virus (Isolate BJ01). *Chinese Science Bulletin*, 48(10):941, 2003.
- [497] Pei-Yuan Qin, Andrew R. Weily, Y. Jay Guo, and Chang-Hong Liang. Polarization Reconfigurable U-Slot Patch Antenna. *IEEE Transactions on Antennas and Propagation*, 58(10):3383–3388, October 2010.
- [498] Wei Qin, Jing Cai, Yun-Li Li, and Jian-Xin Chen. Wideband Tunable Bandpass Filter Using Optimized Varactor-Loaded SIRs. *IEEE Microwave and Wireless Components Letters*, 27(9):812–814, September 2017.
- [499] Raymond Kwok. Lossy\_Medium.
- [500] V.S. Reddy and R. Garg. An improved extended FDTD formulation for active microwave circuits. *IEEE Transactions on Microwave Theory and Techniques*, 47(9):1603–1608, September 1999.
- [501] E. Reese and J.M. Beall. Optimized X and Ku band GaAs MMIC varactor tuned FET oscillators. In *1988., IEEE MTT-S International Microwave Symposium Digest*, pages 487–490, New York, NY, USA, 1988. IEEE.
- [502] R. F. Reitemeier. Centrifuge Tube Agitator, May 2002.
- [503] Yong Ren, Larry Ming-Cheung Chow, and Wallace Woon-Fong Leung. Cell culture using centrifugal microfluidic platform with demonstration on *Pichia pastoris*. *Biomedical Microdevices*, 15(2):321–337, April 2013.
- [504] Canadian Institutes of Health Research. Government of Canada invests \$27M in coronavirus research – Details of the funded projects, March 2020.
- [505] Dennis Revie. Determination of phages in soil. page 2.
- [506] Rhea. *HF Filter Design and Computer Simulation*. Institution of Engineering and Technology, January 1994.
- [507] Randell W. Rhea. *Oscillator Design and Computer Simulation*. IET Digital Library, January 1995.
- [508] Nicole C. Robb, Jonathan M. Taylor, Amy Kent, Oliver J. Pambos, Barak Gilboa, Maria Evangelidou, Alexios-Fotios A. Mentis, and Achillefs N. Kapanidis. Rapid functionalisation and detection of viruses via a novel Ca<sup>2+</sup>-mediated virus-DNA interaction. *Scientific Reports*, 9(1):1–13, November 2019.
- [509] Robert R. Romanofsky. Array Phase Shifters: Theory and Technology. December 2017.
- [510] Wouter H. Roos. AFM nanoindentation of protein shells, expanding the approach beyond viruses. *Seminars in Cell & Developmental Biology*, 73:145–152, January 2018.
- [511] Wouter H. Roos and Gijs J. L. Wuite. Nanoindentation Studies Reveal Material Properties of Viruses. *Advanced Materials*, 21(10-11):1187–1192, March 2009.
- [512] Iulian Rosu. Bias Circuits for RF Devices. page 25.
- [513] RWH Ruigrok, PJ Andree, RAM Hooft Van Huysduynen, and JE Mellema. Characterization of three highly purified influenza virus strains by electron microscopy. *Journal of general virology*, 65(4):799–802, 1984.
- [514] Raymond C. Rumpf, Cesar R. Garcia, Harvey H. Tsang, Julio E. Padilla, and Michael D. Irwin. Electromagnetic Isolation of A Microstrip by Embedding in a Spatially Variant Anisotropic Metamaterial. In *Progress In Electromagnetics Research*, page 2013.
- [515] Daniel A. Russell. Basketballs as spherical acoustic cavities. *American Journal of Physics*, 78(6):549–554, June 2010.
- [516] Mohammad A. Safar and Ayman S. Al-Zayed. A Novel Three-Dimensional Beamforming Antenna Array for Wireless Power Focusing, 2016.
- [517] Jose-Luis Sagripanti and Mays L. Swicord. DNA Structural Changes Caused by Microwave Radiation. *International Journal of Radiation Biology and Related Studies in Physics, Chemistry and Medicine*, 50(1):47–50, January 1986.

- [518] Swarnaprava Sahoo, Laxmi Prasad Mishra, Mihir Narayan Mohanty, and Rabindra Kishore Mishra. Design of compact UWB monopole planar antenna with modified partial ground plane. *Microwave and Optical Technology Letters*, 60(3):578–583, 2018.
- [519] A Sakamoto. Study of Furnace Atmosphere for Vacuum-Inert Gas Partial-Pressure Brazing. *Welding journal*, 11:311, 1991.
- [520] Dan Saks. Preventing dynamic allocation, March 2010.
- [521] T. Samaras, A. Kouloglou, and J.N. Sahalos. A note on the impedance variation with feed position of a rectangular microstrip-patch antenna. *IEEE Antennas and Propagation Magazine*, 46(2):90–92, April 2004.
- [522] M. Sanchez-Renedo, R. Gomez-Garcia, J.I. Alonso, and C. Briso-Rodriguez. Tunable combline filter with continuous control of center frequency and bandwidth. *IEEE Transactions on Microwave Theory and Techniques*, 53(1):191–199, January 2005.
- [523] Radhakrishna Sanka, Joshua Lippai, Dinithi Samarasekera, Sarah Nemsick, and Douglas Densmore. 3D $\mu$ F - Interactive Design Environment for Continuous Flow Microfluidic Devices. *Scientific Reports*, 9(1):9166, December 2019.
- [524] John B Schneider. Understanding the finite-difference time-domain method; 2010. URL [www.eecs.wsu.edu/schneidj/ufdtd](http://www.eecs.wsu.edu/schneidj/ufdtd), 2015.
- [525] Dewald Schoeman and Burtram C. Fielding. Coronavirus envelope protein: Current knowledge. *Virology Journal*, 16(1):69, May 2019.
- [526] Elizabeth Schroeder, Carrie Valdez, Andres Krauthamer, Nadia Khati, Jessica Rasmus, Richard Amdur, Kathleen Brindle, and Babak Sarani. Average chest wall thickness at two anatomic locations in trauma patients. *Injury*, 44(9):1183–1185, September 2013.
- [527] Arnold H. Scott and Joseph R. Kinard. Polymeric materials for dielectric reference specimens. *Journal of Research of the National Bureau of Standards, Section C: Engineering and Instrumentation*, 71C(2):119, April 1967.
- [528] C H See, R A Abd-Alhameed, and P S Excell. Electromagnetic Modelling of Biological Cells Using Lumped Element-FDTD. page 4.
- [529] Sung Won Seo, Ha Yong Jung, Jinho Jeong, and Chan Hyeong Park. Design of an X-band Oscillator Using Novel Miniaturized Microstrip Hairpin Resonator. In *2007 Asia-Pacific Microwave Conference*, pages 1–4, Bangkok, Thailand, December 2007. IEEE.
- [530] B. Servantie. Damage Criteria for Determining Microwave Exposure:. *Health Physics*, 56(5):781–786, May 1989.
- [531] P Serwer and M E Pichler. Electrophoresis of bacteriophage T7 and T7 capsids in agarose gels. *Journal of Virology*, 28(3):917–928, 1978.
- [532] Philip Serwer and Shirley J. Hayes. Agarose gel electrophoresis of bacteriophages and related particles. II. Correction of electrophoretic mobilities for the electro-osmosis of agarose. *Electrophoresis*, 3(2):80–85, February 1982.
- [533] Philip Serwer, Elena T. Moreno, Shirley J. Hayes, Philip Berger, Marie Langham, and Robert W. Toler. Rapid detection and characterization of plant viruses by agarose gel electrophoresis: Size, surface charge and heterogeneity of panicum mosaic and related viruses. *ELECTROPHORESIS*, 5(4):202–208, 1984.
- [534] Linbo Shao, Xue-Feng Jiang, Xiao-Chong Yu, Bei-Bei Li, William R. Clements, Frank Vollmer, Wei Wang, Yun-Feng Xiao, and Qihuang Gong. Detection of Single Nanoparticles and Lentiviruses Using Microcavity Resonance Broadening. *Advanced Materials*, 25(39):5616–5620, October 2013.
- [535] Aishwariya Sharma. An Ultraviolet-Sterilization Protocol for Microtitre Plates. 16:4, 2012.
- [536] D.M. Sheen, S.M. Ali, M.D. Abouzahra, and J.A. Kong. Application of the three-dimensional finite-difference time-domain method to the analysis of planar microstrip circuits. *IEEE Transactions on Microwave Theory and Techniques*, 38(7):849–857, July 1990.
- [537] Robert Shorter, John Smith, Vincent Coveney, and James Busfield. Axial compression of hollow elastic spheres. *Journal of Mechanics of Materials and Structures*, 5(5):693–705, December 2010.

- [538] Eleonora V. Shtykova, Liubov A. Dadinova, Natalia V. Fedorova, Andrey E. Golanikov, Elena N. Bogacheva, Alexander L. Ksenofontov, Liudmila A. Baratova, Liudmila A. Shilova, Vsevolod Yu. Tashkin, Timur R. Galimzyanov, Cy M. Jeffries, Dmitri I. Svergun, and Oleg V. Batishchev. Influenza virus Matrix Protein M1 preserves its conformation with pH, changing multimerization state at the priming stage due to electrostatics. *Scientific Reports*, 7(1):16793, December 2017.
- [539] Robert R. Shuttleworth, Howard C. Elman, Kevin R. Long, and Jeremy A. Templeton. Fast solvers for models of ICEO microfluidic flows. *International Journal for Numerical Methods in Fluids*, 65(4):383–404, February 2011.
- [540] Antonio Šiber, Anže Lošdorfer Božič, and Rudolf Podgornik. Energies and pressures in viruses: Contribution of nonspecific electrostatic interactions. *Phys. Chem. Chem. Phys.*, 14(11):3746–3765, 2012.
- [541] Cole Sigmon, Gwy-Am Shin, John Mieog, and Karl G. Linden. Establishing Surrogate–Virus Relationships for Ozone Disinfection of Wastewater. *Environmental Engineering Science*, 32(6):451–460, April 2015.
- [542] Z. K. Silagadze. Feynman’s derivation of Maxwell equations and extra dimensions. *arXiv:hep-ph/0106235*, January 2002.
- [543] Eduardo dos Santos Silveira, Bernardo Moscardini Fabiani, Marcus Vinicius Pera de Pina, and Daniel Chagas do Nascimento. Polarization reconfigurable microstrip phased array. *AEU - International Journal of Electronics and Communications*, 97:220–228, December 2018.
- [544] Shriya Singh. Optimizing Phagehunting Methods to Isolate and Amplify Bacteriophages Shriya Singh, Enrique Assad-Garcia, Nacyra Assad-Garcia, Lauren Oldfield, Sanjay Vashee, and Derrick E. Fouts J. Craig Venter Institute, Rockville, MD. page 1.
- [545] P. J. Soininen, K.-E. Elers, V. Saanila, S. Kaipio, T. Sajavaara, and S. Haukka. Reduction of Copper Oxide Film to Elemental Copper. *Journal of The Electrochemical Society*, 152(2):G122, 2005.
- [546] T. Solmajer and E. L. Mehler. Modeling solvent effects in molecular dynamics simulations of proteins. *International Journal of Quantum Chemistry*, 44(2):291–299, September 1992.
- [547] somada141. NumPy to VTK: Converting your NumPy arrays to VTK arrays and files, September 2014.
- [548] T. Sowlati and D. Leenaerts. A 2.4 GHz 0.18  $\mu\text{m}$  CMOS self-biased cascode power amplifier with 23 dBm output power. In *2002 IEEE International Solid-State Circuits Conference. Digest of Technical Papers (Cat. No.02CH37315)*, volume 1, pages 294–467 vol.1, February 2002.
- [549] A. Srilakshmi, N.V. Koteswararao, and D. Srinivasarao. X band printed microstrip compact antenna with slots in ground plane and patch. In *2011 IEEE Recent Advances in Intelligent Computational Systems*, pages 851–855, September 2011.
- [550] William A. Steele. Molecular Reorientation in Liquids. I. Distribution Functions and Friction Constants. *The Journal of Chemical Physics*, 38(10):2404–2410, May 1963.
- [551] Eli Steenput. A Spice circuit can be synthesised with a specified set of S-parameters. page 15, 1999.
- [552] Bjarki Stefansson, Ágústa Gudmundsdottir, and Mats Clarsund. A medical device forming a protective barrier that deactivates four major common cold viruses. *Virology: Research and Reviews*, 1(5), 2017.
- [553] J Steinmann. Surrogate viruses for testing virucidal efficacy of chemical disinfectants. *Journal of Hospital Infection*, 56:49–54, April 2004.
- [554] K.D. Stephan. Inter-Injection-Locked Oscillators for Power Combining and Phased Arrays. *IEEE Transactions on Microwave Theory and Techniques*, 34(10):1017–1025, October 1986.
- [555] Alasdair C. Steven, Heather Greenstone, Adelia C. Bauer, and Robert W. Williams. The maturation-dependent conformational change of the major capsid protein of bacteriophage T4 involves a substantial change in secondary structure. *Biochemistry*, 29(23):5556–5561, June 1990.
- [556] Jim Stiles. Note the parameter A is unitless (i.e., it is a coefficient). page 6.
- [557] Maria A. Stuchly and Stanislaw S. Stuchly. Coaxial Line Reflection Methods for Measuring Dielectric Properties of Biological Substances at Radio and Microwave Frequencies-A Review. *IEEE Transactions on Instrumentation and Measurement*, 29(3):176–183, 1980.

- [558] W. Sui, D.A. Christensen, and C.H. Durney. Extending the two-dimensional FDTD method to hybrid electromagnetic systems with active and passive lumped elements. *IEEE Transactions on Microwave Theory and Techniques*, 40(4):724–730, April 1992.
- [559] Chi-Kuang Sun, Yi-Chun Tsai, Yi-Jan E. Chen, Tzu-Ming Liu, Hui-Yuan Chen, Han-Ching Wang, and Chu-Fang Lo. Resonant Dipolar Coupling of Microwaves with Confined Acoustic Vibrations in a Rod-shaped Virus. *Scientific Reports*, 7(1):1–9, July 2017.
- [560] Vaile A. Swenson, Amanda D. Stacy, Michael O. Gaylor, Blake Ushijima, Benjamin Philmus, Loralyn M. Cozy, Nina M. Videau, and Patrick Videau. Assessment and verification of commercially available pressure cookers for laboratory sterilization. *PLoS ONE*, 13(12), December 2018.
- [561] Mays L. Swicord and Christopher C. Davis. Microwave absorption of DNA between 8 and 12 GHz. *Biopolymers*, 21(12):2453–2460, 1982.
- [562] Mays L. Swicord and Christopher C. Davis. An optical method for investigating the microwave absorption characteristics of DNA and other biomolecules in solution. *Bioelectromagnetics*, 4(1):21–42, 1983.
- [563] B.A. Syrett. A Broad-Band Element for Microstrip Bias or Tuning Circuits (Short Papers). *IEEE Transactions on Microwave Theory and Techniques*, 28(8):925–927, August 1980.
- [564] Zbigniew Szczepański. Miniature Thick Film Resistors for Microwave Integrated Circuits. *Active and Passive Electronic Components*, 14(3):119–127, 1991.
- [565] Wacław Szybalski. Bacteriophage Lambda. In Robert C. King, editor, *Bacteria, Bacteriophages, and Fungi: Volume 1*, pages 309–322. Springer US, Boston, MA, 1974.
- [566] Ardalan Taagholt and Tapan K. Sarkar. *Near-Field to Near-Field Transformation for Arbitrary Near-Field Geometry, Utilizing an Equivalent Magnetic Current*.
- [567] Padmavathy Tallury, Astha Malhotra, Logan M Byrne, and Swadeshmukul Santra. Nanobioimaging and sensing of infectious diseases. *Advanced Drug Delivery Reviews*, 62(4):424–437, March 2010.
- [568] Feifei Tan and Changjun Liu. Design of a High-Conversion-Efficiency X-Band Rectifier for Microwave Wireless Power Transmission. In *2018 International Conference on Microwave and Millimeter Wave Technology (ICMMT)*, pages 1–3, Chengdu, May 2018. IEEE.
- [569] Acharya Tankeshwar. Bacteriophage Plaque Assay: Principle, Procedure and Results, December 2018.
- [570] Elvira Tarasova, Vladimir Farafonov, Reza Khayat, Noriaki Okimoto, Teruhisa Komatsu, Makoto Taiji, and Dmitry Nerukh. All Atom Molecular Dynamics Simulations of Entire Virus Capsid Reveal the Role of Ion Distribution in Capsid’s Stability. page 7.
- [571] Elvira Tarasova, Vladimir Farafonov, Makoto Taiji, and Dmitry Nerukh. Details of charge distribution in stable viral capsid. *Journal of Molecular Liquids*, 265:585–591, September 2018.
- [572] Dorota Temple. Recent progress in field emitter array development for high performance applications. *Materials Science and Engineering: R: Reports*, 24(5):185–239, January 1999.
- [573] Marie-Michele Theriault, Kathleen Eddy, Joy N. Borgaonkar, Judith L. Babar, and Daria Manos. Diseases Involving the Central Bronchi: Multidetector CT for Detection, Characterization, and Differential Diagnosis. *RadioGraphics*, 38(1):58–59, January 2018.
- [574] Thingiverse.com. DremelFuge - A One-Piece Centrifuge for Rotary Tools by cathalgarvey.
- [575] Thingiverse.com. Tube Lock for 1.5ml and 2ml Eppendorf Tubes by ML\_SYD.
- [576] Heath Thomas. Magnetic Bead Station.
- [577] V.A. Thomas, M.E. Jones, M. Picket-May, A. Taflove, and E. Harrigan. The use of SPICE lumped circuits as sub-grid models for FDTD analysis. *IEEE Microwave and Guided Wave Letters*, 4(5):141–143, May 1994.
- [578] V.A. Thomas, Kuok-Mee Ling, M.E. Jones, B. Toland, Jenshan Lin, and T. Itoh. FDTD analysis of an active antenna. *IEEE Microwave and Guided Wave Letters*, 4(9):296–298, September 1994.
- [579] B.J. Thompson and G.M. Rose. Vacuum Tubes of Small Dimensions for Use at Extremely High Frequencies. *Proceedings of the Institute of Radio Engineers*, 21(12):1707–1721, December 1933.

- [580] Tzu-Hao Ting, Chih-Chia Chiang, Ken-Fa Cheng, and Yaw-Shun Hong. Effect of silicon carbide dispersion on the microwave absorbing properties of silicon carbide-epoxy composites in 2–40 GHz. *Journal of Polymer Research*, 23(4):82, April 2016.
- [581] María M. Tirado and José García de la Torre. Rotational dynamics of rigid, symmetric top macromolecules. Application to circular cylinders. *The Journal of Chemical Physics*, 73(4):1986–1993, August 1980.
- [582] P. M. Tomasula, M. F. Kozempel, R. P. Konstance, D. Gregg, S. Boettcher, B. Baxt, and L. L. Rodriguez. Thermal Inactivation of Foot-and-Mouth Disease Virus in Milk Using High-Temperature, Short-Time Pasteurization1. *Journal of Dairy Science*, 90(7):3202–3211, July 2007.
- [583] Saraí M. Torres Delgado, Jan G. Korvink, and Dario Mager. The eLoaD platform endows centrifugal microfluidics with on-disc power and communication. *Biosensors and Bioelectronics*, 117:464–473, October 2018.
- [584] S. Toyoda. Microstrip Variable Band-pass Filters Using Varactor-Diodes. In *MTT-S International Microwave Symposium Digest*, volume 80, pages 153–155, Washington, DC, USA, 1980. MTT006.
- [585] Chia-Wen Tsao. Polymer Microfluidics: Simple, Low-Cost Fabrication Process Bridging Academic Lab Research to Commercialized Production. *Micromachines*, 7(12):225, December 2016.
- [586] Chia-Wen Tsao and Don L. DeVoe. Bonding of thermoplastic polymer microfluidics. *Microfluidics and Nanofluidics*, 6(1):1–16, January 2009.
- [587] Shaw-Wei D. Tsen, Tzyy Choo Wu, Juliann G. Kiang, and Kong-Thon Tsen. Prospects for a novel ultrashort pulsed laser technology for pathogen inactivation. *Journal of Biomedical Science*, 19(1):62, July 2012.
- [588] Masaomi Tsuru, Kenji Kawakami, Ken’ichi Tajima, Kazuhiro Miyamoto, Masafumi Nakane, Kenji Itoh, Moriyasu Miyazaki, and Yoji Isota. A Triple-Tuned Ultra-Wideband VCO. *IEEE Transactions on Microwave Theory and Techniques*, 56(2):346–354, 2008.
- [589] Shih-Chung Tuan and Hsi-Tseng Chou. Analytic Analysis of Transient Radiation From Phased Array Antennas in the Near- and Far-Field Focus Applications. *IEEE Transactions on Antennas and Propagation*, 61(5):2519–2531, May 2013.
- [590] Grace Tung-Thompson, Dominic A. Libera, Kenneth L. Koch, Francis L. de los Reyes Iii, and Lee-Ann Jaykus. Aerosolization of a Human Norovirus Surrogate, Bacteriophage MS2, during Simulated Vomiting. *PLOS ONE*, 10(8):e0134277, August 2015.
- [591] Esref Turkmen. A Low Phase Noise X-Band Microstrip VCO with Wideband Tuning Range. page 3.
- [592] Erich Uttenthaler, Michael Schräml, Johannes Mandel, and Stephan Drost. Ultrasensitive quartz crystal microbalance sensors for detection of M13-Phages in liquids. *Biosensors and Bioelectronics*, 16(9):735–743, December 2001.
- [593] John Vagabond. Damped Oscillations and Q factor, October 2008.
- [594] R van der Linden and H J Visser. Analysis, Design and Realization of a Near-Field Focused RF Power Transfer System. *Journal of Physics: Conference Series*, 476:012118, December 2013.
- [595] Henne van Heeren, Christine Peponnet, Peter Hewkin, Marko Blom, Wilfred Buesink, Jan-Eite Bullema, and Stefan Dekker. Design Guideline for Microfluidic Device and Component Interfaces (part 1). page 29.
- [596] L. L. van Zandt. Damping of DNA vibration modes by viscous solvents. *International Journal of Quantum Chemistry*, 20(S8):271–276, March 1981.
- [597] Jose E. Velazco. Miniature Sub-Millimeter Wave Magnetron Oscillator:. Technical report, Defense Technical Information Center, Fort Belvoir, VA, January 2009.
- [598] M D C Velazquez-Ahumada, J Martel, and F Medina. DESIGN OF A BAND-PASS FILTER USING STEPPED IMPEDANCE RESONATORS WITH FLOATING CON- DUCTORS. *Progress In Electromagnetics Research*, 105:18, 2010.
- [599] N.V. Venkatarayalu, C.-C. Chen, F.L. Teixeira, and R. Lee. Numerical Modeling of Ultrawide-Band Dielectric Horn Antennas Using FDTD. *IEEE Transactions on Antennas and Propagation*, 52(5):1318–1323, May 2004.
- [600] M S Venkatesh and G S V Raghavan. An overview of dielectric properties measuring techniques. *CANADIAN BIOSYSTEMS ENGINEERING*, 47:17, 2005.



- [601] Vijayalaxmi. Cytogenetic studies in human blood lymphocytes exposed in vitro to 2.45 GHz or 8.2 GHz radiofrequency radiation. *Radiation Research*, pages 532–538, 2006.
- [602] Vijayalaxmi, Kenneth R. Foster, Junji Miyakoshi, and Luc Verschaeve. Comments on the “Evaluation of the Genotoxicity of Cell Phone Radiofrequency Radiation in Male and Female Rats and Mice Following Subchronic Exposure” by Smith-Roe et al. *Environmental and Molecular Mutagenesis*, 61(2):291–293, February 2020.
- [603] Vijayalaxmi and Thomas J. Prihoda. Comprehensive Review of Quality of Publications and Meta-Analysis of Genetic Damage in Mammalian Cells Exposed to Non-Ionizing Radiofrequency Fields. *Radiation Research*, 191(1):20, October 2018.
- [604] null Vijayalaxmi and Thomas J. Prihoda. Funding Source, Quality of Publications and Outcome in Genetic Damage in Mammalian Cells Exposed to Non-Ionizing Radiofrequency Fields. *Radiation Research*, 192(4):353–362, October 2019.
- [605] D. M. Villeneuve, S. A. Aseyev, P. Dietrich, M. Spanner, M. Yu. Ivanov, and P. B. Corkum. Forced Molecular Rotation in an Optical Centrifuge. *Physical Review Letters*, 85(3):542–545, July 2000.
- [606] Vishay. Frequency Response of Thin Film Chip Resistors. Technical report.
- [607] Joachim von Wulffen, Oliver Sawodny, and Ronny Feuer. Transition of an Anaerobic Escherichia coli Culture to Aerobiosis: Balancing mRNA and Protein Levels in a Demand-Directed Dynamic Flux Balance Analysis. *PLoS ONE*, 11(7), July 2016.
- [608] Zsuzsanna Vörös, Gabriella Csík, Levente Herényi, and Miklós S. Z. Kellermayer. Stepwise reversible nanomechanical buckling in a viral capsid. *Nanoscale*, 9(3):1136–1143, 2017.
- [609] Gregory A. Voth. *Coarse-Graining of Condensed Phase and Biomolecular Systems*. CRC Press, September 2008.
- [610] Israel E. Wachs and Robert J. Madix. The oxidation of ethanol on Cu(110) and Ag(110) catalysts. *Applications of Surface Science*, 1(3):303–328, May 1978.
- [611] Jeff Wadsworth and E Paseo Ventoso. \$25 10 GHz Signal Generator. page 5.
- [612] David I. Walsh, David S. Kong, Shashi K. Murthy, and Peter A. Carr. Enabling Microfluidics: From Clean Rooms to Makerspaces. *Trends in Biotechnology*, 35(5):383–392, May 2017.
- [613] Kent Walters. Introduction to Schottky Rectifiers. page 2.
- [614] H. Wang, X.B. Huang, and D.G. Fang. A Single Layer Wideband U-Slot Microstrip Patch Antenna Array. *IEEE Antennas and Wireless Propagation Letters*, 7:9–12, 2008.
- [615] Jimin Wang, Zheng Liu, Joachim Frank, and Peter B. Moore. Identification of ions in experimental electrostatic potential maps. *IUCrJ*, 5(Pt 4):375–381, June 2018.
- [616] Jingqiang Wang, Jia Ji, Jia Ye, Xiaoqian Zhao, Jie Wen, Wei Li, Jianfei Hu, Dawei Li, Min Sun, Haipan Zeng, Yongwu Hu, Xiangjun Tian, Xuehai Tan, Ningzhi Xu, Changqing Zeng, Jian Wang, Shengli Bi, and Huanming Yang. The Structure Analysis and Antigenicity Study of the N Protein of SARS-CoV. *Genomics, Proteomics & Bioinformatics*, 1(2):145–154, May 2003.
- [617] Ruey-Lue Wang, Yan-Kuin Su, and Chien-Hsuan Liu. 3 5 GHz Cascoded UWB Power Amplifier. In *APCCAS 2006 - 2006 IEEE Asia Pacific Conference on Circuits and Systems*, pages 367–369, December 2006.
- [618] Robert J. Weber. *Introduction to Microwave Circuits: Radio Frequency and Design Applications*. Number 1 in IEEE Press Series on RF and Microwave Technology. IEEE, New York, 2001.
- [619] Houda Werfelli, Khaoula Tayari, Mondher Chaoui, Mongi Lahiani, and Hamadi Ghariani. Design of rectangular microstrip patch antenna. In *2016 2nd International Conference on Advanced Technologies for Signal and Image Processing (ATSIP)*, pages 798–803, Monastir, March 2016. IEEE.
- [620] F.W. Wiegel. Rotational friction coefficient of a permeable cylinder in a viscous fluid. *Physics Letters A*, 70(2):112–113, February 1979.
- [621] Josh Wilkinson and Nigel Davidson. Comparing the measured and modelled response of bespoke antennas using gprMax. In *2017 9th International Workshop on Advanced Ground Penetrating Radar (IWAGPR)*, pages 1–6, Edinburgh, June 2017. IEEE.

- [622] Arthur B. Williams and Fred J. Taylor. *BANDPASS FILTERS*. McGRAW-HILL, 2006.
- [623] Arthur Bernard Williams. *Electronic Filter Design Handbook*. McGraw-Hill's AccessEngineering. McGraw-Hill, New York, 4th ed. edition, 2006.
- [624] Mark Wilson. GaAs and SiGeC BiCMOS Cost Comparison – Is SiGeC Always Cheaper? page 4, 2003.
- [625] R.G. Winch. Wide-band varactor-tuned oscillators. *IEEE Journal of Solid-State Circuits*, 17(6):1214–1219, December 1982.
- [626] Uwe Winter and Tihamer Geyer. Coarse Grained Simulations of a Small Peptide: Effects of Finite Damping and Hydrodynamic Interactions. *The Journal of Chemical Physics*, 131(10):104102, 2009.
- [627] Myung-Heui Woo, Adam Grippin, Chang-Yu Wu, and Joseph Wander. Microwave-irradiation-assisted HVAC Filtration for Inactivation of Viral Aerosols. *Aerosol and Air Quality Research*, 12(3):295–303, 2012.
- [628] Cheng-Hsun Wu and Tzyh-Ghuang Ma. Self-Oscillating Semi-Ring Active Integrated Antenna With Frequency Reconfigurability and Voltage-Controllability. *IEEE Transactions on Antennas and Propagation*, 61(7):3880–3885, July 2013.
- [629] Ming Wu. Physical Mechanisms for Optical Modulators. page 12.
- [630] Ting Wu, Theodore S. Rappaport, and Christopher M. Collins. The human body and millimeter-wave wireless communication systems: Interactions and implications. In *2015 IEEE International Conference on Communications (ICC)*, pages 2423–2429, London, June 2015. IEEE.
- [631] Tzong-Lin Wu. Microwave Filter Design Chp4. Transmission Lines and Components. page 11.
- [632] R.W. Wyndrum. Microwave filters, impedance-matching networks, and coupling structures. *Proceedings of the IEEE*, 53(7):766–766, 1965.
- [633] Xing Chen, Lele Song, Babak Assadsangabi, Jie Fang, Mohamed Sultan Mohamed Ali, and Kenichi Takahata. Wirelessly addressable heater array for centrifugal microfluidics and escherichia coli sterilization. In *2013 35th Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC)*, pages 5505–5508, Osaka, July 2013. IEEE.
- [634] Hui-Jing Yang, Jie Yuan, Yong Li, Zhi-Ling Hou, Hai-Bo Jin, Xiao-Yong Fang, and Mao-Sheng Cao. Silicon carbide powders: Temperature-dependent dielectric properties and enhanced microwave absorption at gigahertz range. *Solid State Communications*, 163:1–6, June 2013.
- [635] Szu-Chi Yang, Huan-Chun Lin, Tzu-Ming Liu, Jen-Tang Lu, Wan-Ting Hung, Yu-Ru Huang, Yi-Chun Tsai, Chuan-Liang Kao, Shih-Yuan Chen, and Chi-Kuang Sun. Efficient Structure Resonance Energy Transfer from Microwaves to Confined Acoustic Vibrations in Viruses. *Scientific Reports*, 5(1):1–10, December 2015.
- [636] Moh Lan Yap and Michael G Rossmann. Structure and function of bacteriophage T4. *Future microbiology*, 9:1319–1327, October 2014.
- [637] Cansu Yavuz, Samad Nadimi Bavil Oliaei, Barbaros Cetin, and Ozlem Yesil-Celiktas. Sterilization of PMMA microfluidic chips by various techniques and investigation of material characteristics. *The Journal of Super-critical Fluids*, 107:114–121, January 2016.
- [638] Hai-Bin Yuan, Xiang-Yu Wang, Jia-Yuan Sun, Fang-Fang Xie, Xiao-Xuan Zheng, Guang-Yu Tao, Lei Pan, and Douglas Kyle Hogarth. Flexible bronchoscopy-guided microwave ablation in peripheral porcine lung: A new minimally-invasive ablation. *Translational Lung Cancer Research*, 8(6):787–796, December 2019.
- [639] Po Ki Yuen and Vasiliy N. Goral. Low-cost rapid prototyping of flexible microfluidic devices using a desktop digital craft cutter. *Lab on a Chip*, 10(3):384–387, February 2010.
- [640] Hairong Zhang, Daniel Salo, David M. Kim, Sergey Komarov, Yuan-Chuan Tai, and Mikhail Y. Berezin. Penetration depth of photons in biological tissues from hyperspectral imaging in shortwave infrared in transmission and reflection geometries. *Journal of Biomedical Optics*, 21(12):126006, December 2016.
- [641] Lei Zhang. Elastic modeling of biopolymer spherical shells. page 157.
- [642] Mi Zhang, Quan Xue, Liming Gu, Wenquan Che, Shichang Chen, and Qi Cai. Dual-band GaN power amplifiers with novel DC biasing networks incorporating offset double-sided parallel strip line. *IET Microwaves, Antennas & Propagation*, 10(3):271–275, February 2016.

- [643] Xiao-Yan Zhang, Zhe-Yu Li, Yu Zhang, Xiao-Qian Zang, Kosei Ueno, Hiroaki Misawa, and Kai Sun. Bacterial Concentration Detection using a PCB-based Contactless Conductivity Sensor. *Micromachines*, 10(1):55, January 2019.
- [644] Tian Zhou, Shi-Shan Qi, Yong Sun, Hui Huang, and Wen Wu. Ka-Band Single Layer Wideband Microstrip Patch Antenna. In *2019 International Conference on Microwave and Millimeter Wave Technology (ICMMT)*, pages 1–3, May 2019.
- [645] Andrea Zonca, Bastien Roucaries, Brian Williams, Ishai Rubin, Ocleto D’Arcangelo, Peter Meinhold, Philip Lubin, Cristian Franceschet, Stefan Jahn, Aniello Mennella, and Marco Bersanelli. Modeling the frequency response of microwave radiometers with QUCS. *Journal of Instrumentation*, 5(12):T12001–T12001, December 2010.
- [646] J.V. Zoval and M.J. Madou. Centrifuge-Based Fluidic Platforms. *Proceedings of the IEEE*, 92(1):140–153, January 2004.