



UNIVERSITY OF
CAMBRIDGE

Department of Engineering

CSI-Feedback-Driven Link Adaptation in 5G NR Downlink MIMO: A Link- Level Simulation Study

Author Name: Kaiyuan Bao

Supervisor: Prof. Albert Guillen i Fabregas, Alexander Hamilton (Nokia)

Date: 30 May 2026

I hereby declare that, except where specifically indicated, the work submitted herein is my own original work.

Signed Kaiyuan Bao 包铠源 date 30 May 2026

Acknowledgement

This research project was completed under the direct supervision of Prof. Albert Guillen i Fabregas from the Department of Engineering, University of Cambridge, and Alexander Hamilton from Nokia. I sincerely thank them for their supervision, support, and encouragement throughout the year, as well as for their guidance on this project.

The completion of this project marks the end of my four-year study at Cambridge. I would like to take this opportunity to thank my parents for their tremendous support during my years in the UK, which made it possible for me to pursue my studies at Cambridge.

Kaiyuan Bao
May 2026

Technical Abstract

CSI-Feedback-Driven Link Adaptation in 5G NR Downlink MIMO: A Link-Level Simulation Study

Kaiyuan Bao (kb784)
Homerton College, University of Cambridge

Supervised by Prof. Albert Guillen i Fabregas and Alexander Hamilton (Nokia)

May 29, 2026

Background and Motivation

Methodology

Key Results and Interpretation

Conclusion

Contents

List of Abbreviations	5
1 Introduction	6
2 Background and Methodology	7
2.1 5G NR Downlink Physical Layer Overview	7
2.2 MIMO Transmission and CSI Feedback	8
2.3 CDL Channel Model and Doppler Shift	9
2.4 MATLAB Simulation Framework	10
2.5 System Configuration and Experimental Design	12
3 Model Validation and Baseline CSI-Feedback Downlink Behaviour	14
3.1 External Link-Level Validation under Fixed-MCS Transmission	14
3.2 Baseline CDL-C 4×4 Throughput Behaviour	16
3.3 CSI-driven Link Adaptation Statistics	17
3.4 Fixed-Rank Controls	19
3.5 Summary of Baseline Findings	20
4 Robustness across MIMO and Channel Configurations	21
4.1 Antenna Configuration Sweep	21
4.2 CDL Channel Profile Sweep	22
4.3 One-layer Control Experiments	23
5 Impact of Mobility and CSI Reporting Periodicity	24
5.1 Doppler Shift under Default CSI Reporting Period	24
5.2 Reporting Periodicity at Low and High mobility	26
5.3 Discussion of CSI Freshness and Practical Trade-Off	29
6 Discussion and Conclusion	31
6.1 Interpretation of Results	31
6.2 Limitations	32
6.3 Future Work	32
6.4 Implications for 5G NR and Future Wireless Systems	33
7 References	34
8 Appendix	35
8.1 Risk Assessment	35
8.2 Ethical Statement	35
8.3 Declaration of the use of generative AI	35
8.4 Detailed Baseline Simulation Configuration	36
8.5 Project Repository and Supporting Materials	36

List of Abbreviations

Abbreviation	Definition
3GPP	Third Generation Partnership Project
5G	Fifth Generation
BER	Bit Error Rate
BLER	Block Error Rate
CDL	Clustered Delay Line
CP	Cyclic Prefix
CQI	Channel Quality Indicator
CSI	Channel State Information
CSI-RS	Channel State Information Reference Signal
CW	Codeword
DL	Downlink
DM-RS	Demodulation Reference Signal
FR	Frequency Range
gNB	Next Generation Node B
HARQ	Hybrid Automatic Repeat Request
LDPC	Low-Density Parity-Check
LOS	Line-of-Sight
MCS	Modulation and Coding Scheme
MIMO	Multiple-Input Multiple-Output
NLOS	Non-Line-of-Sight
NR	New Radio
NZP	Non-Zero Power
OFDM	Orthogonal Frequency Division Multiplexing
PDCCH	Physical Downlink Control Channel
PD SCH	Physical Downlink Shared Channel
PMI	Precoding Matrix Indicator
QAM	Quadrature Amplitude Modulation
QPSK	Quadrature Phase Shift Keying
RAN	Radio Access Network
RB	Resource Block
RE	Resource Element
RI	Rank Indicator
SCS	Subcarrier Spacing
SINR	Signal-to-Interference-and-Noise Ratio
SISO	Single-Input Single-Output
SNR	Signal-to-Noise Ratio
TB	Transport Block
TBS	Transport Block Size
TCR	Target Code Rate
TDL	Tapped Delay Line
UE	User Equipment
UL	Uplink
UMa	Urban Macrocell
UMi	Urban Microcell
XPR	cross polarization power ratios

1 Introduction

1. 5G NR, Physical Layer, MIMO background. Why 5G needs mimo and adaptive transmission
2. Importance of CSI
3. Why fixed-rank, fixed-modulation BER curve is not enough 3. Matlab 5G toolbox simulation
4. Baseline scenario
5. RQs
6. Structure of my research

[Not complete] Mobile telecommunications have experienced rapid development over the past two decades. Starting from the deployment of third-generation (3G) systems in the early 2000s, followed by the introduction of fourth-generation long-term evolution (4G LTE) in the early 2010s, each generation has delivered substantial improvements in data rate and user experience. For end users, the most noticeable change has been the transition from limited and slow web browsing to smooth video streaming and real-time online services. These improvements were enabled by key physical-layer innovations, including the use of orthogonal frequency division multiple access (OFDMA) in 4G LTE, replacing the code division multiple access (CDMA) used in earlier systems, as well as the introduction of more advanced multi-antenna techniques [1].

Building upon the capabilities of 4G, the fifth-generation mobile communication system (5G) has been designed to further increase data rates, reduce latency, and support a wide range of services. Three main usage scenarios are defined for 5G: enhanced mobile broadband (eMBB), massive machine-type communications (mMTC), and ultra-reliable and low-latency communications (URLLC) [2]. Together, these scenarios impose diverse requirements on 5G, ranging from extremely high data rates to massive device connectivity, as well as stringent latency and reliability constraints. To meet these requirements, multiple-input multiple-output (MIMO) techniques play a central role. In particular, massive MIMO systems enable significant throughput gains through spatial multiplexing, null forming and beamforming [3].

The realization of these requirements relies on globally agreed technical specifications, which are defined by the Third Generation Partnership Project (3GPP), a global standardisation body established in 1998 for the development of specifications for 3G. Its scope has expanded from third-generation of cellular networks to the standardisation and continuous evolution of 4G, 5G, and technologies beyond. The first release of 5G NR, Release 15, was published by 3GPP in 2019, marking the point at which 5G NR became ready for practical implementation. In the release, core technical specifications for 5G NR were defined. 3GPP is currently continuing its work on 5G-Advanced and early studies towards 6G [4].

[Not complete] This research project aims to provide insights that can support future 3GPP standardisation discussions related to MIMO techniques in 5G and beyond. Simulations are conducted in MATLAB using a framework aligned with 3GPP specifications. This alignment includes the use of standardized channel models as well as baseline system parameters commonly adopted in 3GPP testings, such as carrier frequency and bandwidth. This report introduces the relevant background concepts, presents the adopted simulation methodology, and summarises the current progress and preliminary findings of the project.

2 Background and Methodology

2.1 5G NR Downlink Physical Layer Overview

1. OFDM
2. PDSCH (DL)
3. DM-RS
4. CSI-RS
5. Slot, RB
6. Definition of BER/BLER/Throughput
7. Why throughput not BER

2.2 MIMO Transmission and CSI Feedback

Specifics of CSI: PMI, RI, CQI

Feedback loops

How the modulation scheme/TCR/rank changes based on the feedback

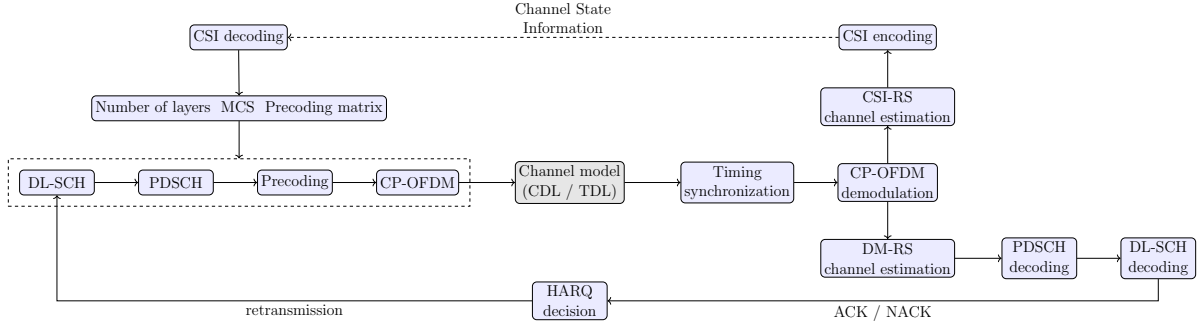


Figure 1: Overview of the CSI-based downlink transmission and feedback framework, adapted from [5]

[Not complete] As illustrated in Figure 1, the downlink transmission relies on channel state information (CSI) obtained through reference signal measurements at the receiver. The user equipment (UE) estimates the downlink channel based on CSI reference signals (CSI-RS). Based on the estimated channel, the CSI is encoded into three main feedback components: the Channel Quality Indicator (CQI), Precoding Matrix Indicator (PMI), and Rank Indicator (RI).

CQI is a 4-bit indicator with values ranging from 0 to 15, representing the reported downlink channel quality. It provides an indication of the highest modulation scheme and coding rate that can be supported under a predefined target block error rate (BLER). The precoding matrix indicator (PMI) specifies the precoding matrix applied at the transmitter, while the rank indicator (RI) indicates the recommended number of transmission layers [5].

There are various parameters that affect the quality of the CSI. These include the CSI reporting periodicity, which controls how frequently the feedback is updated, as well as the reporting mode, which can be configured as wideband or subband. In addition, parameters such as the codebook type and mode, and the subband size further impact the granularity of the reported CSI. In time-varying channels, infrequent or coarse CSI reporting may lead to outdated channel knowledge at the transmitter, therefore degrading the performance of the transmission.

The reported CSI is fed back to the transmitter and used to configure key downlink transmission parameters, including the modulation scheme, target code rate, number of transmission layers, and the precoding matrix. Using these updated parameters, the transmitter processes the data through the DL-SCH and maps it to the PDSCH, followed by precoding and CP-OFDM modulation before transmission over the wireless channel. At the receiver, the received signal is synchronised, demodulated, and decoded using demodulation reference signals (DM-RS) for coherent detection.

2.3 CDL Channel Model and Doppler Shift

CDL model definition

CDL ABCDE difference, why CDL-C default

Doppler shift definition and impact

Also: Why demodulation performance, cdl more realistic, not just TDL to verify if everything works,

[Not complete] There are two widely used channel models in 5G NR link-level evaluations, namely the tapped delay line (TDL) model and the clustered delay line (CDL) model. Each model has several variants designed to represent different propagation environments such as urban, suburban, and rural scenarios. The TDL model provides a simplified representation of the multipath channel and is commonly used for baseline evaluations or scenarios where spatial characteristics and multi-antenna effects are not modelled.

In the TDL model, the channel is represented as a superposition of multiple discrete propagation paths (taps), each characterised by a specific delay τ_l and a path gain $h_l(t)$:

$$h(t, \tau) = \sum_{l=0}^{L-1} h_l(t) \delta(\tau - \tau_l). \quad (1)$$

The TDL model does not represent angular or spatial features of the propagation channel. In contrast, the clustered delay line (CDL) model incorporates spatial information and therefore provides a more realistic channel description. Similar to the TDL model, the CDL model defines a set of multipath clusters characterised by relative delays and average powers. In addition, each cluster is associated with angular parameters, including the azimuth and zenith angles of departure and arrival (AoD, AoA, ZoD, and ZoA). Each cluster is further decomposed into multiple sub-rays with random initial phases and Doppler components. By modelling these spatial characteristics, the CDL channel model enables a more accurate representation of the spatial characteristics of MIMO channels, at the cost of increased complexity and higher computational cost [6].

The CDL profiles are defined by their cluster-level delay, power, angular parameters, angular spreads and XPR.

In addition to CSI, 5G NR also employs hybrid automatic repeat request (HARQ) to improve the robustness of the transmission through re-transmissions. After DL-SCH decoding at the receiver, an acknowledge/negative acknowledge (ACK/NACK) signal is fed back to the transmitter, which indicates whether a re-transmission is required. In the case of a decoding failure, the transport block is re-transmitted using a different redundancy version (RV) and combined at the receiver, thus increasing the probability of successful decoding [2] [7].

Table 2: Summary of CDL channel model profiles based on 3GPP TR 38.901 [8]

Channel Model	LOS/NLOS	Characteristics	Indicative Use Case [†]
CDL-A	NLOS	Profile with relatively limited angular dispersion compared with CDL-B, and a higher XPR than CDL-B/C.	UMi
CDL-B	NLOS	Profile with the largest azimuth angular spread among the NLOS CDL profiles.	UMi
CDL-C	NLOS	Profile with a richer delayed multipath structure, more clusters, and the smallest departure angular spread among the NLOS CDL profiles.	UMa
CDL-D	LOS	Profile including a specular LOS component.	UMa
CDL-E	LOS	Profile including a specular LOS component, with a longer normalised delay tail than CDL-D.	UMa

[†] The indicated use cases are interpretative examples rather than fixed definitions in 3GPP TR 38.901. Their association with UMi or UMa scenarios depends on the selected RMS delay spread and the overall simulation setup.

2.4 MATLAB Simulation Framework

Table 3 below summarises the baseline system and channel configuration adopted in this study, which is aligned with the assumptions commonly used in 3GPP evaluation studies, including TR 38.753 [9]. The full set of parameters used are shown in the Appendix section Table 11. There different mobility scenarios are considered. The low-mobility case assumes a maximum Doppler shift of 10 Hz, corresponding to a UE speed of 3 km/h, a default setting for 3GPP testing. For medium- and high-mobility cases, the 100 Hz and 390 Hz Doppler shift corresponds to the speed of approximately 30 km/h and 120 km/h respectively for a 3.5 GHz carrier frequency.

Table 3: System and channel configuration used in the simulations

Parameter	Value
Carrier frequency	FR1, 3.5 GHz
Subcarrier spacing	30 kHz
Channel bandwidth	106 RBs
Antenna configuration	4 Tx, 4 Rx
Maximum number of layers	4
Channel model	CDL-C
Mobility scenarios	10 Hz (Default), 100 Hz, 390 Hz
Simulation type	Downlink link-level

The CDL-C channel model is selected as it represents a typical non-line-of-sight (NLOS) urban macro environment and is widely used in 3GPP evaluation studies, while modelling spatial characteristics are essential for the study of CSI feedback. A 4×4 MIMO configuration with up to four transmission layers is considered, reflecting a representative frequency range 1 (FR1) deployment while maintaining a manageable simulation complexity. This configuration allows multi-layer transmission as well as rank adaptation to be studied within a single-codeword framework, avoiding additional variability introduced by using an additional codeword, and thus enabling a clearer assessment of the effect of the CSI feedback parameters.

The PDSCH, DM-RS and CSI-RS parameters used for the downlink resource-grid illustration are summarised in Table 4. Based on these configurations, the downlink resource grid is shown in Fig. 2 for a CSI-RS-active slot. The first two OFDM symbols are left unallocated because the PDSCH time-domain allocation starts from symbol 2. In practice, these initial symbols can be reserved for downlink control signalling, such as PDCCH transmission within a CORESET, although PDCCH is not explicitly modelled in this link-level simulation.

Table 4: Key PDSCH, DM-RS and CSI-RS parameters used for simulation

Parameter		Value
PDSCH configuration	Mapping type	Type A
	Starting symbol	2
	Length	12
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	1
	Max. number of OFDM symbols for DL front loaded DMRS	2
	Number of CDM groups without data	1
NZP CSI-RS for CSI acquisition	CSI-RS resource type	Periodic
	Density	1
	Symbol location	4
	Subcarrier location	0

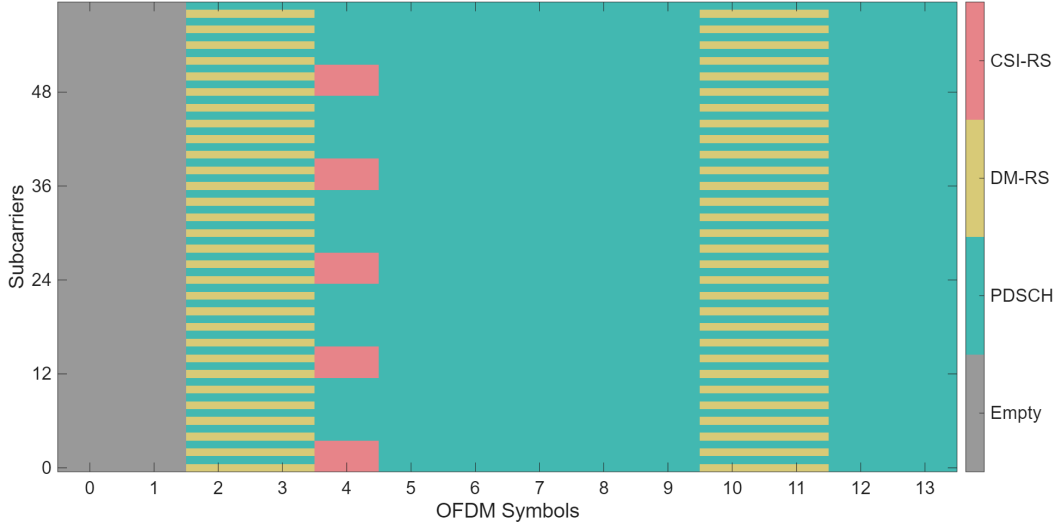


Figure 2: Downlink resource grid showing the allocation of PDSCH, DM-RS and CSI-RS

2.5 System Configuration and Experimental Design

This study focuses on investigating the impact of CSI feedback parameters on downlink transmission performance. The baseline CSI configuration follows the settings specified in relevant 3GPP specifications, including TS 38.101-4 [10]. Both the baseline configuration and the investigated parameter ranges are summarised in Table 5. The investigated ranges represent the set of valid discrete configurations specified by 3GPP. Unless otherwise stated, all simulations use the baseline CSI configuration listed in Table 5. The full set of CSI configurations used are shown in the Appendix section Table 12.

Table 5: Baseline CSI feedback configuration used in the simulation framework

Parameter	Baseline setting
CSI report periodicity	10 slots
CQI reporting mode	Wideband
PMI reporting mode	Wideband
Subband size	16 RBs
RI configuration	Adaptive
Codebook type	Type I
Codebook mode	Mode 1

In section 3, the behaviour of the system under baseline condition will be simulated and investigated. In section 4, the performance of the system under different MIMO, CDL channel configurations will be investigated, which examines whether the baseline behaviour observed in the baseline scenario remains interpretable under these changes. In section 5, the CSI reporting period will be varied to analyze suitable reporting period for different scenarios and the underlying reasons behind the observations. Only a subset of the parameters under investigation is varied in each experiment, while the remaining parameters are kept fixed at their baseline values to ensure a controlled comparison. Table 6 shows a brief summary of the simulation study groups that are going to be simulated. Note that sometimes may change multiple parameters at the same time.

Table 6: Summary of simulation study groups and objectives

Study group	Purpose	Varied parameter
Baseline	CDL-C 4×4 reference performance	–
Fixed-rank controls	Layer adaptation	RI = 1, RI ≤ 2 , RI ≤ 4 , RI = 4
MIMO configuration sweep	Antenna configuration sensitivity	2×2 , 4×4 , 8×4
CDL profile sweep	Channel-model robustness	CDL-B, CDL-C, CDL-D
Doppler sweep	Mobility sensitivity	10 Hz, 100 Hz, 390 Hz
CSI period sweep	CSI feedback freshness	4, 10, 64, 160 slots

Table 7: Simulation execution settings

Parameter	Value
SNR range	–5 to 25 dB, with 1 dB spacing
Number of simulated frames	1500 10-ms frames per SNR point
Channel estimation	Practical channel estimation

3 Model Validation and Baseline CSI-Feedback Down-link Behaviour

At the beginning of the section, a simplified scenario where the adaption mechanism is temporarily disable, so that the modulation scheme, target code rate and number of transmission of layers are fixed is tested and compared with the results reported by other companies in the 3GPP technical reports. This is used to validate the correctness of the overall simulation framework.

Afterwards, the CSI is enabled, and the behaviour of the system under the baseline case as introduced in the last section is tested. The performance of the system as well as the role of CSI is investigated and analyzed in detail to provide a good understanding of the feedback decisions. At the second half of the section, a fixed-rank control is implemented to isolate the rank adaptation mechanism and .. the multi-layer transmission.

3.1 External Link-Level Validation under Fixed-MCS Transmission

In the simulation model validation, a MCS 13 (Table 1), 4Tx 4Rx, 4-layer, random PMI transmission with a maximum Doppler of 10Hz setting is used. The HARQ is enabled in this simulation. The rest of the configurations remains unchanged from the default values defined in Table 3. The modulation order, target code rate and number of PDSCH layers are fixed, so the result mainly reflects the decoding reliability of a given transmission. The performance is characterized by BLER. The plot is then compared with the simulated results reported by different firms, as shown in Fig. 3.

The SNR corresponding to the 70% and 30% BLER is commonly used during comparison. The results are presented in the table below.

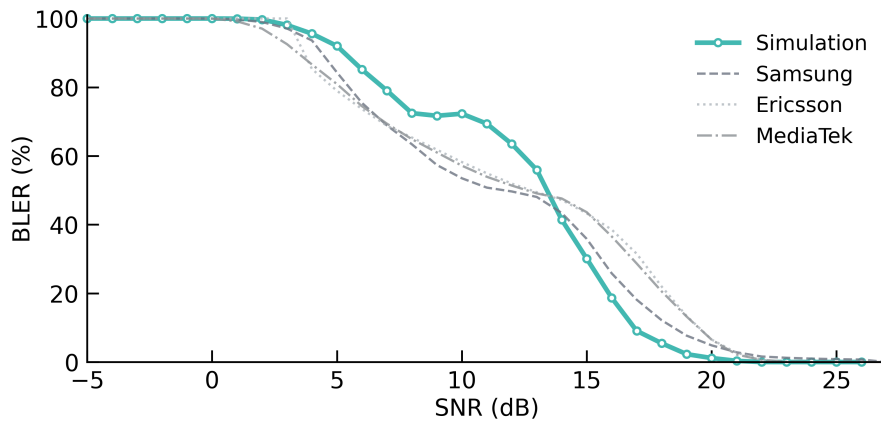


Figure 3: BLER comparison between the simulation and firm-provided baselines, with firm data adapted from [11]

Table 8: Interpolated SNR required to achieve selected BLER levels for the simulation and firm-standard baselines

Target BLER (%)	Simulation	Samsung	Ericsson	MediaTek	Industry Average
70	10.8 dB	6.8 dB	6.8 dB	6.9 dB	6.8 dB
30	15.0 dB	15.6 dB	17.2 dB	16.8 dB	16.5 dB

[†] SNR values obtained using linear interpolation.

The simulated BLER curve follows the same general trend as the firm-provided baselines: the BLER remains close to 100% at low SNR below 1 dB, decreases as the SNR increases, and approaches zero at high SNR above 23 dB.

From the simulated result, a plateau-like region is observed at intermediate SNR values, approximately between 7 and 10 dB. This behaviour may be partly attributed to the HARQ mechanism under the fixed-MCS configuration. Around 7 dB, the initial improvement in SNR allows some transport blocks that fail in the first transmission to be recovered through HARQ retransmission and combining, leading to a noticeable reduction in BLER. However, for the remaining more challenging channel realisations, the same fixed modulation, coding rate and layer configuration may still be too aggressive, so further BLER reduction is limited until the SNR becomes sufficiently high, above approximately 10 dB. Therefore, the plateau-like region can be interpreted as a transition region where HARQ improves the reliability of some blocks, but is not yet sufficient to recover the more difficult decoding cases.

The difference between the simulation and the firm-provided baselines is expected, as the comparison is not based on an identical receiver implementation. At 70% BLER near the plateau, the discrepancy is around 4 dB, and at 30% BLER, the discrepancy gets smaller to around 1.5 dB.

Even with the same agreed transmission configuration, BLER is sensitive to implementation details such as channel estimation, LDPC decoding algorithm, iteration count, HARQ combining settings and so on. The specific details and the simulation files are not commonly disclosed by the firms, not to even say that the results obtained by the firms are likely to be conducted on the program constructed by the firms themselves, in stead of on public available software like MATLAB, or publicly available packages in Python. As a result, from the figure above, it is clear that large discrepancies around 2 dB even exist between the results of different firms.

As a result, it can be concluded that the simulated result in general aligns in a satisfactory manner with the industrial results. This validation should be interpreted as a qualitative and semi-quantitative alignment of the BLER trend, rather than an exact one-to-one reproduction of a specific BLER curve.

For the subsequent simulation studies, throughput in Mbps is used instead of BLER as the main performance metric. This is because the later experiments involve CSI-driven link adaptation, where the MCS, number of layers and feedback configuration may change across transmission conditions. In such cases, the maximum achievable throughput will change every slot based on the settings, and therefore BLER alone is not sufficient to represent system performance. A configuration may achieve a low BLER simply by selecting a conservative MCS or fewer layers, but this does not necessarily imply high spectral efficiency or high user throughput.

Additionally, in real-life scenarios, the network operators generally focus more on the throughput than the BLER, as the throughput directly captures the useful successfully delivered data rate, which is what directly impacts the user experience. Therefore, throughput in Mbps is a more appropriate metric for comparing CSI-feedback and MIMO configurations in the rest of the project.

Furthermore, HARQ was disabled in all subsequent simulation studies in order to isolate the impact of CSI feedback and MIMO-related configurations on the first-transmission performance. This also avoids introducing additional HARQ-related effects, such as the plateau-like behaviour observed in the fixed-MCS validation case discussed above. Since the objective of this project is to compare the relative impact of different CSI configurations rather than to optimise HARQ operation, disabling HARQ provides a cleaner and more controlled basis for comparison.

3.2 Baseline CDL-C 4×4 Throughput Behaviour

Fig. 4 presents the baseline downlink throughput for the CDL-C 4×4 MIMO configuration with adaptive CSI feedback. At the simulated range of -5 dB to 25dB, the throughput curve is increasing. The curve shows a gradual increase at low SNR, followed by a steeper transition region between approximately 5 dB and 17 dB. At 10dB, the throughput is approximately xxx Mbps. The throughput saturates at high SNR of approximately xxx Mbps. The behaviour of the system is explained in the next subsection according to the CSI-related behaviours. This baseline provides the reference case against other scenarios compared in the subsequent simulations.

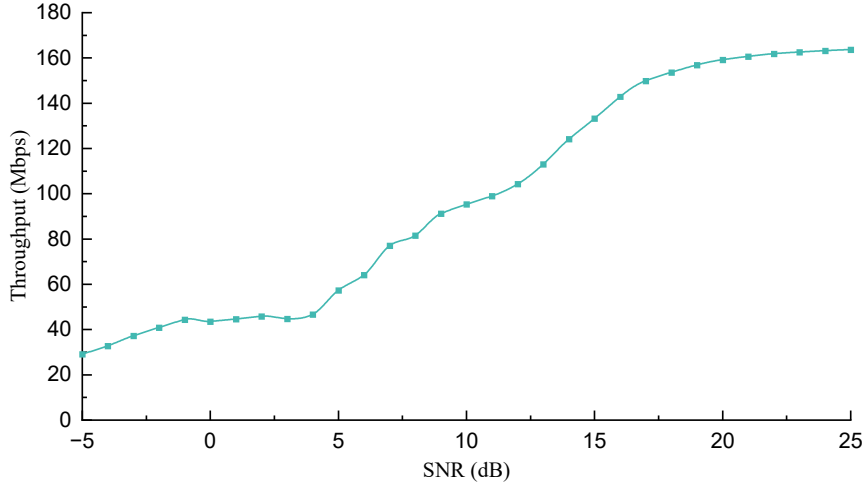


Figure 4: Baseline downlink throughput performance for the CDL-C 4×4 configuration with adaptive CSI feedback

3.3 CSI-driven Link Adaptation Statistics

In addition to the performance of the system, the behaviour of the CSI during the transmission is shown in Fig. 5 below. The four respective figures demonstrates the changes of CQI, target code rate (TCR), RI as the SNR changes as well as the use of modulation schemes at different SNR levels. CQI, TCR and RI are not fixed for each SNR testing point, but instead varies base on the real-time feedbacks and channel condition, even within subband (?). vertical bars which functions as the distribution spread indicator has been introduced to the three subfigures to characterize the consistency and variability. The bars indicate the 5th to 95th percentile range of each value range rather than the full minimum–maximum range. This choice is used to represent the typical spread of the selected CQI values while reducing the influence of rare extreme channel deep-fades or favorable fading realizations, making the results more representative.

For CQI plot, as the SNR increases, the selected CQI rises gradually from 5 at low SNR to around 11 at high SNR, indicating that the link adaptation gets gradually more aggressive during the transmission due to the improved channel conditions. The peak CQI the system has every selected is 14.

Correspondingly, the target code rate of the system follows a similar trend, overall increasing from ... to nearly The TCR curve is not strictly increasing but instead having a oscillatory behaviour. The local minimum occur at SNR points where major change in modulation scheme occurs as the system would select a higher modulation scheme but in the meantime using a lower TCR. The two major local minimum occurs at around -3 dB and 4 dB, which corresponds to the SNR when the system switches the main modulation from QPSK to 16QAM, and from 16QAM to 64QAM respectively.

The selected RI also changes with SNR, reflecting that the system changes the number of layers used for transmission under different channel conditions. At SNR lower than 2 dB, the system mainly selected RI = 1, representing a robust single-layer transmission. The RI increases to 2 at higher SNR, enabling steeper increase in throughput. Since the MIMO configuration is 4×4 , a maximum of 4-layer transmission can be supported. However, the RI does not increase beyond 2 under this scenario, likely due to, partly causing the throughput to saturate to a throughput level below theoretical limit at very high SNR.

For table 1 and 3 (...), three modulation schemes are supported, which are QPSK, 16QAM and 64QAM. 256 QAM is only supported when (...) and is uncommonly used due to its high requirement on channel condition. At very low SNR, the main modulation scheme is QPSK. As the SNR increases, QPSK quickly disappears and 16 QAM becomes dominant. For SNR higher than 10dB, 64QAM modulation dominates. The change in modulation scheme is gradual instead of abrupt, where the higher order modulation scheme will gradually be used more frequently as the SNR increases. The system uses 64 QAM for around 90% of the cases, while the rest of the time using 16 QAM, likely during unusual channel degradation such as deep fade.

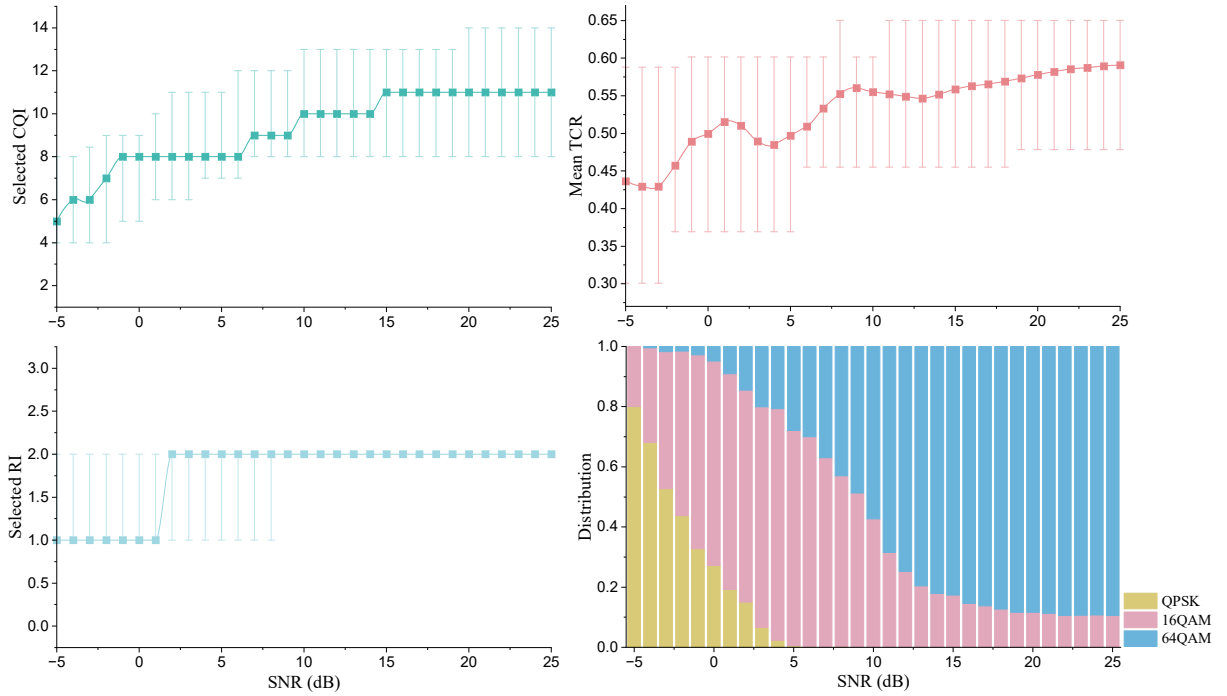


Figure 5: CSI-driven link adaptation behaviour across SNR

Explain why shape of throughput curve

3.4 Fixed-Rank Controls

Figure 6 compares the downlink throughput under different rank-restriction configurations. The $\text{RI} \leq 4$ case corresponds to the original baseline, where up to four transmission layers are permitted. The $\text{RI} \leq 2$ case restricts the adaptive RI selection to at most two layers, while the $\text{RI} = 1$ case forces single-layer transmission.

The $\text{RI} \leq 4$ and $\text{RI} \leq 2$ curves are almost identical across the full SNR range. This confirms that, under the configuration considered here, allowing more than two layers provides little additional throughput benefit. This observation is consistent with the link adaptation statistics in Figure 5, where the selected RI increases from one to two at low-to-moderate SNR but does not increase beyond $\text{RI} = 2$.

The fixed $\text{RI} = 1$ curve behaves differently. At low SNR, single-layer transmission can be slightly more robust than two-layer transmission, leading to lower BER and therefore higher throughput. However, as SNR increases, the lack of spatial multiplexing becomes the dominant limitation. The $\text{RI} = 1$ throughput saturates at around xxx Mbps starting from around 17 dB, whereas the adaptive RI cases reach approximately xxx Mbps. This shows that adaptive multi-layer transmission is essential for achieving the high-SNR throughput gain. The higher-rank transmission beyond two layers is not effectively exploited in this baseline scenario, but the usage of adaptive layer transmission will be even bigger in a richer $\mathcal{H}$ channel that supports more independent paths $\mathcal{H}$.

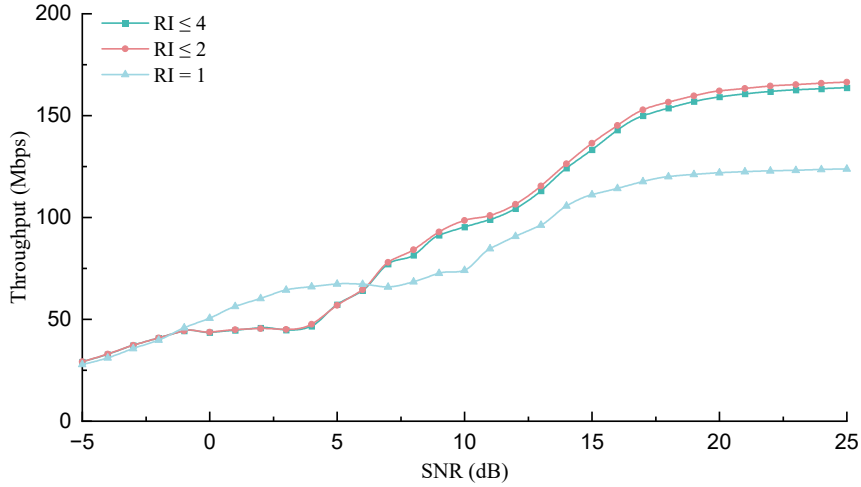


Figure 6: Downlink throughput performance under different maximum layer configurations

3.5 Summary of Baseline Findings

1. The above result is the baseline 2. Examines the impact of CSI and how it actually works

4 Robustness across MIMO and Channel Configurations

This chapter examines if the baseline behaviour observed in the previous section remains consistent under different MIMO and CDL channel configurations. The aim of this part is to check whether the main link-adaptation trends remain interpretable when the spatial and channel conditions are changed.

4.1 Antenna Configuration Sweep

Figure 7 compares the downlink throughput performance under different MIMO antenna configurations. The 4×4 case corresponds to the baseline configuration discussed in the previous chapter. Two additional configurations 2×2 and 8×4 are tested.

Despite the fact that, as also shown in the previous section that the maximum number of layers that are actually been used are 2, having a larger antenna array leads to better performance of the system due to

The 2×2 configuration leads to a noticeably lower throughput across the SNR ranges as compared to the baseline 4×4 configuration and saturates at around 90 Mbps. This is as expected, as a smaller antenna configuration leads to fewer spatial degrees of freedom.

Oppositely, the 8×4 case can in general lead to better performance of the system. At low-to-medium SNR region, the increase in Tx antennas leads to higher throughput than the baseline, suggesting that the larger transmit array improves the effective channel quality and allows the link adaptation algorithm to select more efficient transmission parameters at lower SNR values ρ_{eff} . The throughput for baseline outperforms 8×4 , however, when the SNR is above 17dB, reaching approximately xxx Mbps compared with around xxx Mbps for 8×4 .

This difference should not be interpreted as evidence that 8×4 MIMO is inherently worse at high SNR. The saturated performance of the system is a result of the CSI feedback, which often lead to slightly different CQI, thus different TCR, layer or even transmission schemes. The result here indicates that the additional transmit antennas are not fully converted into a higher peak throughput under the current CSI feedback configuration. In this setup, the benefit of 8×4 is mainly observed as an SNR gain of approximately 5 dB in the low-to-medium SNR region rather than as a higher saturation throughput.

mention what number of layers / RI using `rn`

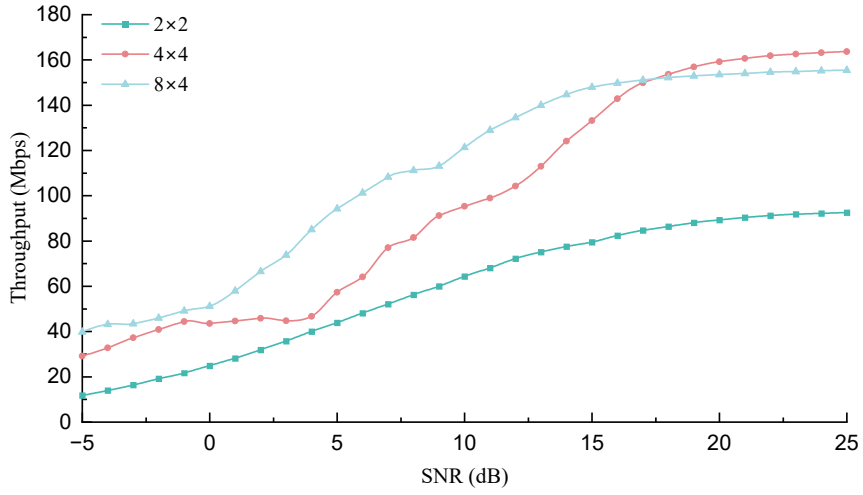


Figure 7: Downlink throughput performance under different MIMO configurations **Still need to check 1x1 and 4x8 and 8x8? results**

4.2 CDL Channel Profile Sweep

The second check varies the CDL channel profile while keeping the baseline 4×4 MIMO configuration and CSI feedback settings unchanged.

Figure 8 compares the downlink throughput performance under CDL-B, a typical NLOS channel, and CDL-D, a typical LOS channel with the baseline. The CDL-C case corresponds to the baseline configuration. ?????Maybe explain why CDL-C is most commonly used.?????

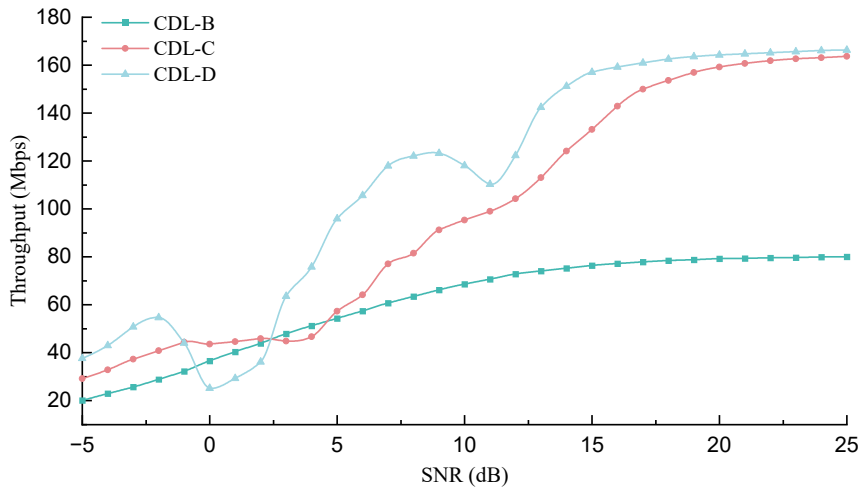


Figure 8: Downlink throughput performance under different CDL channel models

For all three CDL profiles, the throughput increases with SNR and eventually approaches saturated levels, showing that the general link-adaptation behaviour remains consistent.

However, the performance of the system under different channel models vary greatly. The CDL-B profile increases gradually, almost always worse than the baseline scenario and saturates at a much lower throughput, around xxx Mbps, as compared to baseline CDL-C. This is as expected as the CDL-B channel model has lower potential in spatial multiplexing as compared to CDL-C.

The CDL-D profile on the other hand achieves the best overall performance. It generally leads to higher throughput at low-to-medium SNR regions and, while leading to almost the same saturated throughput as CDL-C at the high SNR, enters the saturated zone in advance. The overall performance has approximately 5 dB in SNR gain as compared to the baseline. This behaviour is also as expected, as the CDL-D channel has a major LOS component, which supports reliable and rapid transmission even at a low SNR situation, leading to clear advantage as compared to other scenarios, when one-layer transmission is used.

Overall, the CDL profile sweep shows that regardless the channel used, the overall shape of the throughput curve is to a large extent consistent. But the achievable throughput and required SNR are channel-dependent. For example, among the two additional models tested here, CDL-D mainly improves the transition-region SNR requirement while CDL-B represents a more limiting channel condition under the current setup.

4.3 One-layer Control Experiments

Similar to section 3.4, a controlled experience is conducted to test the performance of the simulations in this section performs when the maximum number of layers supported is fixed to 1, as shown in Figure 9. In contrast to the adaptive baseline, where the rank indicator is selected through CSI feedback, the transmission rank is constrained to one layer throughout the SNR sweep.

Considering the 4×4 cases, the conclusion from Fig. 8 remains mostly unchanged. CDL-B model is, across the whole simulated SNR range, largely worse than the baseline scenario. CDL-D channel outperforms the baseline at low-and-medium SNR regions, while achieving slightly lower saturated throughput than the baseline.

Compared with the adaptive CDL profile sweep, the fixed one-layer result provides a useful diagnostic reference. In the adaptive case, performance differences may arise from both single-layer link quality and the ability of the channel to support spatial multiplexing. Under fixed one-layer transmission, however, rank adaptation is removed. Therefore, the remaining differences mainly reflect how each CDL profile supports robust single-layer transmission under the same CSI feedback and other configurations. Considering the sweep of MIMO configurations when the CDL-C channel model is used, the

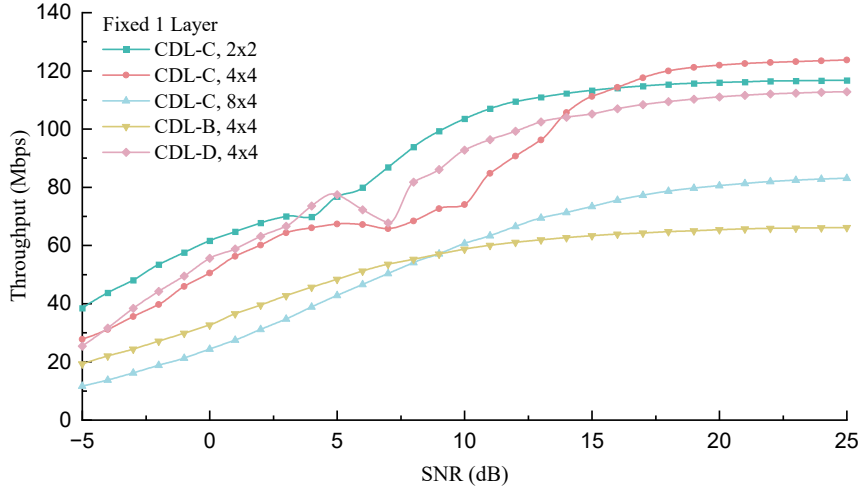


Figure 9: Downlink throughput comparison under fixed one-layer transmission Some issue with [2x2] and [8x4] curves, re-simulate

5 Impact of Mobility and CSI Reporting Periodicity

This chapter investigates the impact of mobility and CSI reporting periodicity on the CSI-driven downlink transmission performance. In a time-varying channel, the CSI obtained from CSI-RS measurements may become outdated before it is applied for the transmission. This effect is expected to become more significant as the Doppler shift increases or as the CSI reporting period becomes longer. Therefore, this chapter first studies the impact of Doppler shift under the baseline scenario, before examining the effect of different reporting periodicities.

5.1 Doppler Shift under Default CSI Reporting Period

Figure 10 shows the impact of Doppler shift on downlink throughput under the baseline CSI reporting period. The three Doppler shifts, 10 Hz, 100 Hz, and 390 Hz, represent increasing levels of system mobility. With a carrier frequency of 3.5 GHz, these correspond approximately to UE speeds of 3 km/h, 30 km/h, and 120 km/h, respectively. The general throughput behaviour remains similar across all Doppler cases: the throughput increases with SNR, and eventually approaches a high-SNR saturation level. However, higher Doppler shift causes a visible rightward shift of the throughput curve. This indicates that, under higher mobility, a larger SNR is required to achieve the same throughput level.

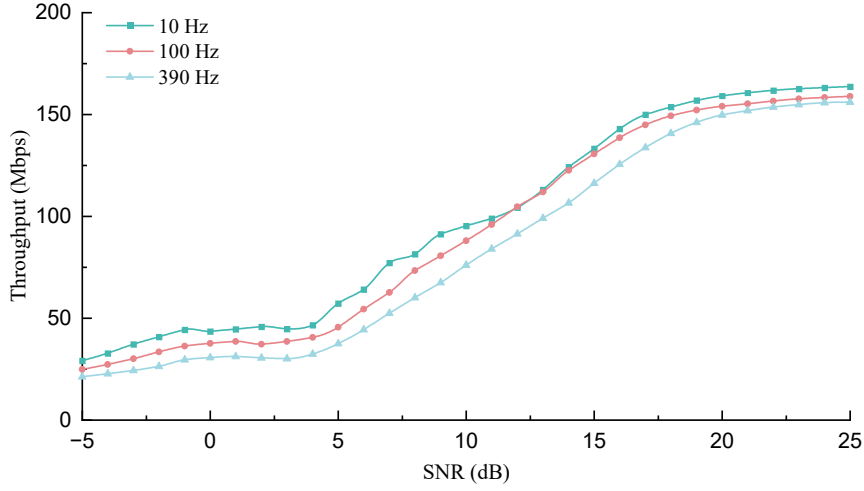


Figure 10: Impact of Doppler shift on downlink throughput

Table 9: Interpolated SNR values at selected target throughput levels

Target Throughput (Mbps)	SNR 10 Hz (dB)	SNR 100 Hz (dB)	SNR 390 Hz (dB)
50	4.3	5.5	6.7
80	7.7	8.9	10.5
110	12.7	12.7	14.4
140	15.7	16.2	17.9

[†] SNR values obtained using linear interpolation.

This observation is quantified in Table 9, which shows the required SNR level for each curve to reach different target throughput levels. The required SNR values are obtained by linear interpolation of the throughput curve. For example, to reach 80 Mbps, the required SNR increases from 7.7 dB at 10 Hz to 8.9 dB at 100 Hz and 10.5 dB at 390 Hz. This corresponds to an SNR penalty of approximately 1.2 dB and 2.8 dB relative to the 10 Hz baseline. Alternatively, with a target throughput of 140 Mbps, the 390 Hz case requires 17.9 dB compared with 15.7 dB for the 10 Hz case.

At high SNR, the difference of throughput for different mobility cases become closer, although the higher-Doppler cases remain slightly lower. This suggests that high SNR can partially compensate for mobility-induced degradation.

The reason.....The degradation is consistent with CSI ageing. With a fixed CSI reporting period and processing delay, the CSI used for link adaptation becomes less representative of the actual channel at the time of transmission when the channel varies more rapidly. As a result, the selected RI, PMI, and CQI may become less accurate, leading to less effective precoding and MCS selection. The effect is most visible in the transition region, where link adaptation decisions are particularly sensitive to the estimated channel quality.???

The results of this subsection motivate the following CSI periodicity study. Since the degradation at higher Doppler is partly caused by CSI ageing, reducing the CSI reporting period may help improve the freshness of the feedback and recover part of the throughput loss under high-mobility conditions.

5.2 Reporting Periodicity at Low and High mobility

Following the observation from the previous subsection, figure 11 compares the effect of CSI reporting periodicity under low- and high-mobility scenarios. In both cases, the CSI-RS and CSI reporting periods are varied simultaneously while the remaining configuration is kept unchanged, consistent with the baseline settings.

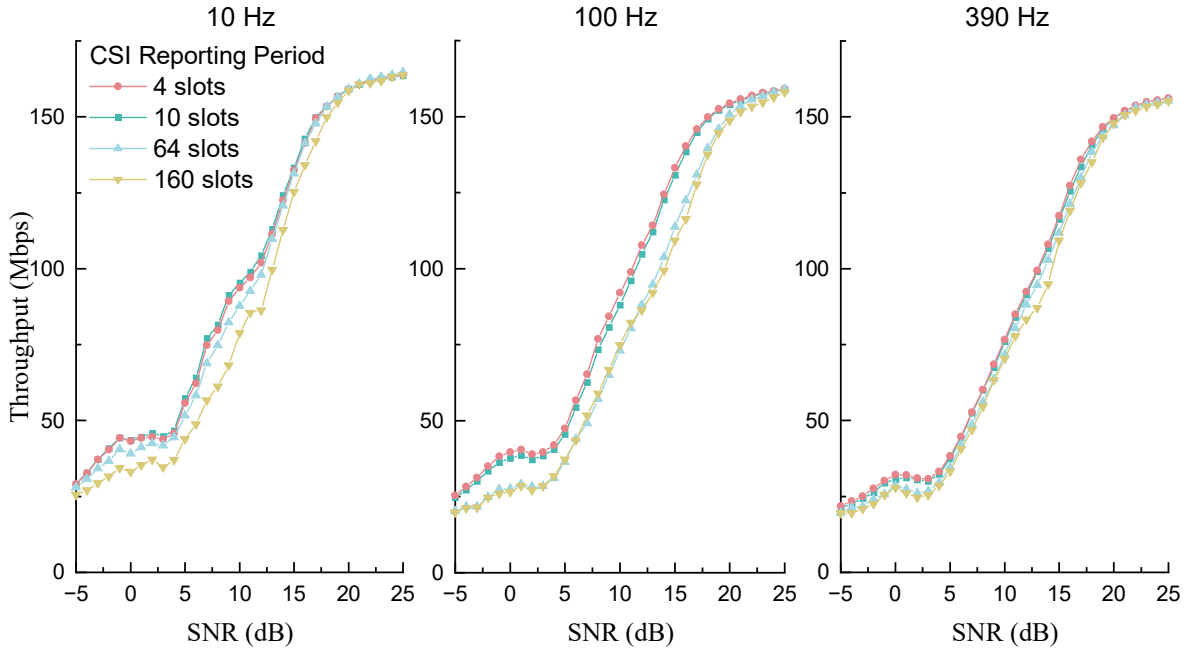


Figure 11: Downlink throughput performance under different CSI reporting periods for low- and high-mobility scenarios

For the 10 Hz case, the throughput curves are relatively close across different reporting periods. For SNR below 20dB, the performance of low reporting periods 64 slots and 160 slots is clearly worse than the baseline performance, which is equivalent to a rightward shift of the throughput curve. As the SNR enters high region, the performance difference between different reporting periods converges, showing that the improvement in SNR can yield to ... The reporting per 4 slots however, does not in general show any noticeable improvement comparing to report every 10 slots.

The observation shows that, even under low mobility where the channel changes slowly, having denser CSI remains useful, despite the throughput improvement is limited.

For the high mobility 390 Hz case, similar trends has been observed. The 4-slot reporting period achieves the best performance for low-to-medium ranges, where longer periods require a higher SNR to reach similar throughput levels. At high SNR, the performance different shrinks and disappears. However, the amount of improvement clearly decrease compared to the low mobility scenario, which is unexpected and will be discussed in more following part.

need to add 100Hz

Overall, the results show that reducing the CSI reporting period provides limited benefit under to the system. The main effect is an SNR gain in the transition region rather than a significant increase in high-SNR saturation throughput.

The CSI report also comes with the trade-off, despite having higher more frequent CSI improves the performance, it also increases uplink feedback overhead, impacting the uplink throughput and leading to higher UE processing and power consumption. Therefore, more detailed analysis will be conducted to quantify the benefit of having denser CSI report under different scenarios.

In the following analysis, a CSI reporting period of 10 slots is used as the baseline, denoted as $P_0 = 10$. For each Doppler shift f_D , the reference peak throughput is defined as

$$R_{f_D}^{\max} = \max_{\gamma} R_{f_D, P_0}(\gamma), \quad (2)$$

where $R_{f_D, P}(\gamma)$ is the measured downlink throughput at SNR γ under CSI reporting period P . The target throughput level used for each mobility test case is 50% of the reference peak throughput with 10 slots baseline reporting period.

The SNR required for each reporting period P with fixed mobility f_D to reach the target throughput can be obtained by linear interpolation, denoted as $\gamma_{f_D, P}(0.5R_{f_D}^{\max})$. The change in performance due to the use of different reporting period is evaluated base on the relative SNR penalty or gain with respect to the baseline

$$\Delta\gamma_{f_D, P} = \gamma_{f_D, P}(0.5R_{f_D}^{\max}) - \gamma_{f_D, 10}(0.5R_{f_D}^{\max}). \quad (3)$$

Positive values of $\Delta\gamma_{f_D, P}$ indicate an SNR penalty, while negative values indicate an SNR gain. In addition to the slow and fast mobility scenarios tested from Fig. 11, the medium mobility with 100 Hz Doppler shift is also tested. The same plot for the medium mobility case is shown in Fig. ?? in the Appendix [change here](#). The quantitative results are shown in Table 10 below.

Table 10: SNR required to reach 50% of the baseline reference peak throughput

Doppler	CSI period	$\gamma_{50\%}$	$\Delta\gamma$
10 Hz	4 slots	8.2 dB	0.1 dB
10 Hz	10 slots	8.1 dB	–
10 Hz	64 slots	9.0 dB	0.9 dB
10 Hz	160 slots	10.5 dB	2.4 dB
100 Hz	4 slots	8.5 dB	-0.5 dB
100 Hz	10 slots	9.0 dB	–
100 Hz	64 slots	11.0 dB	2.0 dB
100 Hz	160 slots	10.8 dB	1.8 dB
390 Hz	4 slots	10.3 dB	-0.1 dB
390 Hz	10 slots	10.4 dB	–
390 Hz	64 slots	10.8 dB	0.4 dB
390 Hz	160 slots	11.2 dB	0.8 dB

[†] Reference peak throughput values used: 163.9 Mbps at 10 Hz, 161.0 Mbps at 100 Hz, 158.0 Mbps at 390 Hz.

Table 10 quantifies the relative impact of CSI reporting periodicity within each mobility condition.

At 10 Hz, using very dense CSI reports have only a limited effect. The 4-slot and 10-slot cases require almost the same SNR to reach the target throughput, with only a 0.1 dB difference. However, increasing the reporting period to 64 and 160 slots introduces clear SNR penalties of 0.9 dB and 2.4 dB, respectively. This indicates that although the channel is slowly varying at 10 Hz, very infrequent CSI reporting can still degrade the performance at mid SNR region because the feedback becomes less representative of the current channel state.

For the 390 Hz case, consistent with the observation from Fig. 11, having lower reporting period leads to penalties of 0.4 dB and 0.8 dB relative to the baseline, which is smaller than the penalty for 10 Hz scenario, which are 0.9 dB and 2.4 dB respectively. Increasing the report frequency to every four slots also only leads to ignorable amount of improvements.

The impact of CSI period change has more visible impact for the 100 Hz scenario. The 4-slot case achieves a 0.5 dB SNR gain relative to the 10-slot baseline, showing that more frequent reporting does lead to better performance. In addition, slowing down the report to every 64-slot and 160-slot causes 2.0 dB and 1.8 dB additional SNR, respectively, much more dominant than the other two mobility scenarios.

The non-monotonic difference between 64 and 160 slots for the 390 Hz case and between 4 and 10 slots for the 10 Hz case should not be over-interpreted, as it is likely due to simulation inaccuracy, limited number of frames simulated, and the discrete nature of CSI-driven CQI, PMI, and RI decisions.

Overall, the results from this subsection show that CSI reporting periodicity mainly affects the SNR required in the transition region rather than the final saturation throughput. Shorter reporting periods can provide an SNR gain by reducing CSI ageing, especially under moderate mobility. Under low mobility (3km/h) case, having denser CSI period has only limited benefit to the transmission as the channel is not undergo rapid change. Under high mobility (120km/h) case, similar observation is observed, but the underlying reason is completely the opposite, since the channel is changing too-rapidly. Having short reporting period alone in this scenario does not fully recover the loss caused by rapid channel variation. The CSI is affected not only by the reporting period, but also by factors such as processing delay, channel estimation accuracy, and the time variation between CSI report and transmission, where these issues become especially dominant under high mobility.

5.3 Discussion of CSI Freshness and Practical Trade-Off

The results in Sections 5.1 and 5.2 show that the value of CSI feedback should not be evaluated only by its reporting granularity or reporting frequency. Instead, its effectiveness depends on the environment, especially the mobility of the system that impacts the channel directly. A visualization of the relative SNR offset under different situation is shown in Fig. 12 below based on data from Table 10.

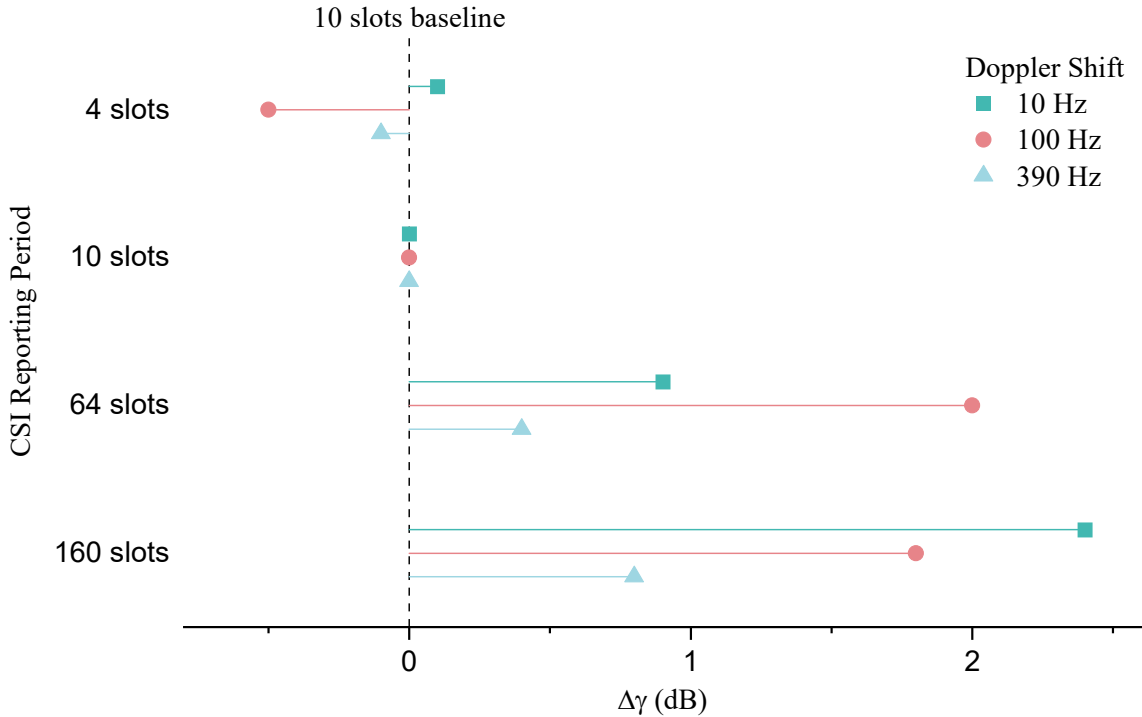


Figure 12: Relative SNR offset $\Delta\gamma$ with respect to the 10-slot CSI reporting baseline

Based on the results, it is clear that a CSI reporting period is suitable to be used as the default setting during the transmission. It in general provides a satisfactory level of performance for the system while avoided the use of overly-frequent CSI reports. The 10 slots period is especially suitable as, for the 10 Hz and 100 Hz scenario, significant performance degradation will occur when the CSI period decreases from per 10 slots to 64 slots (0.9 dB and 2 dB respectively).

However, the results also shows that the system has the potential to adjust the CSI periodicity based on the channel condition, thus achieving a trade-off balance between the performance and the uplink through as well as the UE power consumption. For example, when the UE is at medium-speed around 30 km/h, it has been proven that the system can enjoy a noticeable improvement in the throughput when increasing the reporting period from default baseline to per 4 slots. In the meantime, for high-speed scenarios such as on a train or motorway, using the default value may even be considered as a waste of energy for the UE. A CSI report every 64 slots, or options in between such as per 32 or 40 slots might be ideal. In addition, Fig. 11 has also showed that at high SNR, the throughput curves for different reporting periods converge to similar saturation levels. This suggests that having frequent CSI report is only beneficial at low-to-medium SNR regions. At high SNR regions, using per 64 slots or 160 slots reporting is already enough for the system.

More frequent CSI reporting improves the freshness of CSI and can reduce the SNR required to achieve a given throughput, but it also increases uplink feedback overhead and consumes more power of the UE. This overhead includes the resources required to transmit RI, PMI, and CQI reports, and becomes more significant when reporting is frequent. The observation here provides an insight to the CSI reporting period adjustment algorithm in terms of finding the most suitable reporting period based on the environment and channel status.

Moreover, the simulation results suggest that the optimal CSI reporting period is mobility- and scenario-dependent. In addition to the fixed rules discussed in the previous paragraphs, a closed-loop feedback algorithm could be introduced during transmission to adaptively select the CSI reporting period. Starting from a default reporting period, or from an empirically selected value based on the current scenario, the system could adjust the reporting period among neighbouring options and measure the resulting gain or penalty. If the improvement is considered significant enough to justify the additional feedback overhead, the new CSI reporting period could be adopted for a predefined duration before being re-evaluated.

AI

6 Discussion and Conclusion

6.1 Interpretation of Results

The results from the previous sections confirm that CSI feedback functions as a meaningful link adaptation mechanism in the simulated 5G NR downlink system.

By allowing the transmitter to optimize rank, modulation scheme, target code rate, and PMI according to the estimated channel condition, the system can avoid some inefficient fixed-transmission choices and therefore achieving better performance under given condition. The improvement due to CSI feedback is particularly clear from the fixed-rank control experiments in Section 3.4, where constraining the rank leads to performance loss where the channel could otherwise support more adaptive transmission layer selections.

The robustness experiments from Section 4 further show that the overall behaviour of the system is universal and The result shows that different channel models antenna MIMO configurations lead towards similar behaviour of the throughput curves, despite the absolute values may vary largely depending on how the specific channel is constructed or the array and multiplexing gain brought by the MIMO system.

In Section 5, an in-depth investigation on the optimal selection of CSI reporting period based on the channel condition has been conducted. The results confirm that CSI freshness is a trade-off rather than an absolute objective. More frequent CSI reports can improve the accuracy of link adaptation noticeably when the channel varies sufficiently fast and when the system operates in a low-to-medium SNR region where the throughput curve is sensitive to CSI quality. However, once the system approaches the high-SNR saturation region, or when either the UE is nearly stationary or moving very fast, the extra feedback overhead may only bring limited downlink benefit, while leading to unnecessary power waste and reducing the maximum uplink throughput that can be achieved. A close-loop feedback algorithm for adaptive reporting period has also been proposed to balance between the trade-offs.

Overall, the project shows that CSI feedback can greatly contributes to the performance of the downlink transmission. The reporting configuration should be set depending on the operating scenario, rather than being fixed purely by a conservative default value or simply targeting maximum possible downlink throughput.

6.2 Limitations

The study is based on link-level simulation. Therefore, it focuses on the behaviour of a single downlink connection and does not explicitly model multi-user scheduling, MU-MIMO scenario, uplink transmission, traffic dynamics, or network-level resource allocation ??????. As a result, the conclusions are most directly applicable to physical-layer link adaptation rather than complete system-level network optimisation. Since only downlink is modeled, there is a lack of results on the quantitative cost of CSI reporting in terms of how the feedback overhead will lead to additional uplink resource consumption, therefore impacting the uplink throughput and UE power consumption. The trade-off between downlink throughput improvement and uplink reporting cost is therefore evaluated mainly from the observed downlink performance trends.

In the meantime, the HARQ mechanism is disabled during the simulation for simplicity. Despite this would not lead to loss of generality, the absolute throughput in practice may deviate from the simulated ??????

The simulation uses a selected set of carrier, antenna, channel, Doppler and CSI-reporting configurations based on the default configuration commonly set during 3GPP requirement tests. These choices are sufficient to reveal the main trends, but they do not cover the full NR parameter space. Many other parameters, such as codebook types and CQI wideband versus subband settings or may lead to different quantitative results.

Finally, despite practical factors such as the UE delay in CSI report processing has been considered during the simulation, the receiver and channel-estimation assumptions remain simplified compared with a real-life implementation. Practical hardware impairments, calibration errors, imperfect synchronisation and more are not fully represented. Therefore, the absolute throughput values should be interpreted as simulation-based indicators rather than direct predictions of field performance, and can generally be seen as the upper limit of the performance.

6.3 Future Work

Future work could first introduce an explicit feedback-overhead model to quantify the cost of the CSI reporting period to the uplink. The proposed adaptive CSI reporting algorithm can be implemented and tested. This would turn the empirical observations in this project into a practical feedback-control strategy that can be implemented to the real-life system.

Further work could also extend the simulation to a wider range of deployment scenarios, including for different channel conditions and different antenna configurations. A system-level study that supports MU-MIMO would be useful for evaluating whether the link-level conclusions remain valid when resources are shared among multiple users, The adaptation algorithm is also expected to be more complicated when the base station is connected to multiple UEs.

Finally, due to the limited time, only a limited number of CSI settings have been investigated. Deeper CSI adaptive strategies can be investigated combining the effect of different settings under more diverse transmission conditions.

AI

6.4 Implications for 5G NR and Future Wireless Systems

The findings of this project have broader implications beyond the specific simulation cases considered in this report. Although the study is based on link-level simulation and cannot be seen as a direct prediction to the performance of the system in real-life testing conditions, it provides useful insights for standardisation-oriented discussions, especially for 3GPP, on the design and update of CSI standards.

In practical system design, the objective is not only to maximise downlink throughput, but also to balance downlink performance against uplink performance, UE power consumption, implementation complexity, compatibility and robustness under a range of vastly different conditions. Due to this, the simulated results suggest that overly frequent CSI reporting may not always be justified, especially when the resulting downlink throughput gain is limited or when the system already operates near the high-SNR saturation region. Therefore, an adaptive CSI reporting strategy as proposed may provide a more efficient solution than using a fixed configuration across all scenarios.

The whole simulation is completed based on 5G NR. However, the 6G that is currently still under discussion and development have a lot in common with the 5G NR, including the CSI report. The trade-off is expected to become even more important in future 6G systems. Traditional mobile traffic has often been dominated by downlink services such as video streaming and content delivery. However, future applications may create stronger uplink demand, including high-resolution live streaming, extended-reality interaction, high volume data-exchange and so on. In such scenarios, the uplink transmission will be as important as the downlink transmission, therefore aiming to have similar level of throughput. In this case the uplink resources will become increasingly valuable, and excessive CSI feedback may compete more frequently with user-data transmission. This further strengthens the need to evaluate CSI reporting and other related parameters.

Overall, this project supports a broader design direction in which CSI feedback configuration should be selected according to scenario-dependent system utility. Rather than configure the CSI, such that peak DL throughput can be reached, future 5G and 6G systems could benefit from adaptive mechanisms that jointly consider channel variation, mobility, SNR region, and other factors such as the UL throughput and power consumption. This would allow CSI reporting to contribute to more efficient, robust and balanced wireless communication systems.

7 References

- [1] A. Manikas, “Principles of 3G (CDMA), 4G (OFDMA) and 5G,” Imperial College London EE303 Communication Systems.
- [2] E. Dahlman, S. Parkvall, and J. Sköld, *5G NR: The Next Generation Wireless Access Technology*, 2nd ed. Academic Press, 2020.
- [3] Ericsson AB, “Massive MIMO.” [Online]. Available: <https://www.ericsson.com/en/ran/massive-mimo>
- [4] 3GPP, “3rd Generation Partnership Project (3GPP).” [Online]. Available: <https://www.3gpp.org/about-us/introducing-3gpp>
- [5] MathWorks, “NR PDSCH Throughput Using Channel State Information Feedback,” 5G Toolbox Documentation. [Online]. Available: <https://www.mathworks.com/help/5g/ug/nr-pdsch-throughput-using-csi-feedback.html>
- [6] ETSI, “Study on channel model for frequencies from 0.5 to 100 GHz,” ETSI TR 138 901, Nov. 2020.
- [7] MathWorks, “Model 5G NR transport channels with HARQ,” 5G Toolbox Documentation. [Online]. Available: <https://www.mathworks.com/help/5g/gs/model-5g-nr-transport-channels-with-harq.html>
- [8] 3GPP, “Study on channel model for frequencies from 0.5 to 100 ghz,” 3GPP TR 38.901, Mar. 2026, (Release 19).
- [9] 3GPP, “Study on spatial channel model for demodulation performance requirements for NR,” 3GPP TR 38.753, Sep. 2025, Release 19.
- [10] 3GPP, “User Equipment (UE) radio transmission and reception. Part 4: Performance requirements,” 3GPP TS 38.101-4, Sep. 2025, Release 19.
- [11] 3GPP, “Results collection table for NR SCM,” 3GPP R4-2509413, Bengaluru, India, Aug. 2025, RAN4 Meeting #116.

8 Appendix

8.1 Risk Assessment

A complete risk assessment was provided in the submitted Technical Milestone Report (TMR). Since this project is entirely simulation-based and does not involve any physical laboratory experiments, no safety-related or hardware-related risks were identified. The only practical risk identified was the limited time available for the project relative to the computational cost of the simulations.

The risk assessment presented in the TMR remains valid, and the identified computational risk has been carefully managed throughout the project. For example, during the development of the simulation program, particular care was taken to ensure that the code could be executed in parallel on multiple CPU workers using the MATLAB Parallel Computing Toolbox, rather than being limited to a single CPU thread at a time. In addition, external computing resources were used where necessary, including the CUED central computing system `ts-access`.

8.2 Ethical Statement

This project is entirely simulation-based and does not involve personal data or physical laboratory experiments. Therefore, no direct safety, privacy, or human-related ethical risks are identified.

From an environmental perspective, the project requires computational resources for MATLAB simulations. Although the total computational demand is very limited relative to most other simulation-based research projects, unnecessary computation was avoided where possible by using a consistent baseline setup, a clearly pre-defined experimental structure and an appropriate number of simulated frames to balance result accuracy and computational cost.

Additionally, the findings of the project may have positive social and environmental implications, as they provide a detailed analysis of CSI feedback and MIMO techniques, which could potentially contribute to more efficient wireless communication system. For example, the results may help avoid using overly frequent uplink reporting when it is unnecessary. Improved link adaptation can also support better spectral efficiency and more reliable connectivity.

8.3 Declaration of the use of generative AI

Generative AI tools, specifically ChatGPT and Google Gemini, were used in a limited capacity during the completion of the project. AI assistance was used mainly during the early stage of the project, including to facilitate the understanding of related concepts and to support the debugging of the MATLAB simulation implementation.

It can be confirmed that the experimental design, data analysis, interpretation of results, final conclusions, and report content were completed and verified by the author. No AI tool was used, in any form, to generate, modify, or manipulate the simulated data.

8.4 Detailed Baseline Simulation Configuration

Table 11: Baseline simulation parameters, adapted from TR 38.753 where applicable [9]

Parameter		Value
Duplex mode		TDD
FR / Carrier frequency		FR1, 3.5GHz
Maximum Doppler shift		10 Hz
Channel Bandwidth / SCS		40Mhz / 30kHz
Maximum allowed rank		4
Antenna configuration		4Tx4Rx
Channel model		CDL-C
Delay spread		300 ns
Codebook configuration for PDSCH and DMRS		Single Panel Type I
MCS table		Table 1 (64 QAM)
PDSCH configuration	Mapping type	Type A
	k0	0
	Starting symbol	2
	Length	12
PDSCH DMRS configuration	DMRS Type	Type 1
	Number of additional DMRS	1
	Max. number of OFDM symbols for DL front loaded DMRS	2

Table 12: Baseline CSI simulation parameters, adapted from TR 38.753 where applicable [9]

Parameter		Unit	Value
NZP CSI-RS for CSI acquisition	CSI-RS resource type		Periodic
	Density		1
	Symbol location		4
	Subcarrier location		0
	CSI-RS interval and offset	slot	10, 1
CQI			Wideband
PMI			Wideband
CQI/RI/PMI delay		ms	7

8.5 Project Repository and Supporting Materials

The simulation code and supporting materials developed for this project have been made available in a GitHub repository: <https://github.com/Bariumoxid/MIMOTechniques>. The repository includes the main MATLAB simulation scripts, configuration files, workflows, and representative test cases used to generate and validate the results presented in this report. It also contains additional supporting materials, including weekly progress reports, the logbook, and source files for the report and figures.