




Operating manual

**Attachment device Eyepatch
Mobile version für quickly mounting
on a mounting plate
DB-EYE-01-EU
„UF-Serie“**

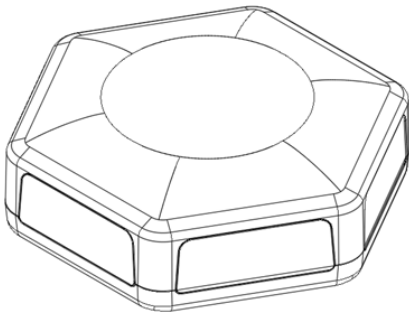

BAUTA GmbH
Werner-von-
Siemens-Straße 2-6,
76646 Bruchsal

Mail:
info@bauta.io
Web:
www.bauta.io

Language: ENG
Ident-Nb: DB-EYE
Version: 1.1
Date: 22.07.2026

1	Product and manufacturer	3
1.1	Product	3
1.2	Manufacturer	3
2	About this operating manual	3
2.1	Purpose	3
2.2	Availability	3
2.3	Warnings	4
2.3.1	Signal words and signal colours	4
2.3.2	Structure	4
2.4	Symbols	4
2.4.1	Warning signs	5
2.4.2	Mandatory signs or symbols	5
3	Description of the device	6
3.1	General description	6
3.2	Functional description	6
3.3	Scope of delivery	7
3.4	Views	8
3.4.1	Top view and views from the rear at an angle	8
3.4.2	View from the left, from the right and view from the rear	8
3.4.3	Front view	9
3.5	Usage and operating models	9
3.5.1	Usage mode	9
3.5.2	Operating modes	9
3.5.3	Description of operating modes	9
3.6	Display and control elements	10
3.7	Available interfaces	10
3.8	Type plate	11
4	Technical Specifications	11
4.1	Operational Loads	11
4.2	Dimensions	11
4.3	Product mass	12
4.4	Power supply	12
4.5	Environmental conditions	12
4.5.1	Operation	12
4.5.2	Transport	12
4.5.3	Storage	12
5	Safety	12
5.1	Intended use	12
5.2	Scope of application	13
5.3	Roles and qualification of personnel	13
5.4	Cyber security	13
5.5	Warnings	13
6	Installation	14
6.1	Required external accessories	14
6.2	Safety instructions	15
6.3	Carrying out the installation	15
7	Commissioning, operation and downtime	19
7.1	Commissioning	19
7.2	Operation	19
7.3	Downtime	19
8	Maintenance / Servicing / Repairs	20
8.1	Service address	20
9	Cleaning	20
10	Disposal	21
11	EU Declaration of Conformity (CE)	21
12	Appendix / Notes	23

1 Product and Manufacturer

1.1 Product

This user manual describes the following product.

Single-unit version (Version B) of the device for hardware-based encryption of sensor data.

Type: B-EYE-01-EU

1.2 Manufacturer

Name and address	BAUTA GmbH Werner-von-Siemens-Str, 2-6 76646 Bruchsal 
Mail	info@bauta.io
Web	www.bauta.io

2. About this operating manual

To ensure the correct and safe use of this low-voltage appliance, please follow the instructions and recommendations set out in this operating manual.

Please keep this operating manual for future reference until the appliance has been disposed of.

2.1 Purpose

This operating manual contains information on the safe, trouble-free and economical use of the device. This information is intended for persons who install, commission or use the device.

The following table provides an overview of the persons involved and their tasks.

Person	Task
Operator	Operating the device or starting or stopping continuous recording (scrambled images). Transferring and viewing the data / processed data on an external device / computer system / server.
Maintenance Technician (BAUTA-certified specialist)	Maintenance of the equipment.
Installer and user of the equipment	Installation and commissioning of the unit.

2.2 Availability

The operator shall make this operating manual, or extracts thereof, available to users of the equipment.

The operator shall keep this operating manual, or extracts thereof, readily accessible in the immediate vicinity of the equipment.

2.3 Warning notices

This operating manual contains warning notices that alert users to residual hazards.

The classification of the warnings is based on the severity of the harm that may result from disregarding the warnings or failing to follow the recommended actions.

2.3.1 Signal words and signal colours

Warnings may be introduced by one of the following signal words and marked with a corresponding signal colour.

Signal word	Meaning	Signal colour
WARNING	Consequences of non-compliance: Death or very serious injury may result.	
CAUTION	Consequences of non-compliance: Serious or minor injuries may result.	
NOTICE	Consequences of non-compliance: Possible damage to property or the environment.	

2.3.2 Structure

The warnings can be presented in accordance with the SAFE method:

S	Signal words used (CAUTION or NOTE)
A	Nature and source of the hazard Description of the hazard and its cause
F	Consequence Description of the potential consequences for humans, animals and the environment that may arise from the hazard
E	Escape Recommendations on how to avoid danger

2.4 Symbols

The following symbols are used in this operating manual.

2.4.1 Warning signs

A warning sign is a safety sign that warns of a risk or hazard.

The table below provides an overview of the warning signs used and their meanings.

Symbol	Meaning	Symbol	Meaning
	General warning sign		Fire hazard

2.4.2 Mandatory signs or symbols

A mandatory sign is a safety sign that prescribes a specific course of action.

The table below provides an overview of the mandatory signs or symbols used and their meanings.

Symbol	Meaning	Symbol	Meaning
	Follow the instructions		Unplug the power lead
	The printed operating manual must always be available on site!		

3 Description of the device

This section contains information to help you understand the device.

3.1 General description

The basic structure and design of the device are outlined below.

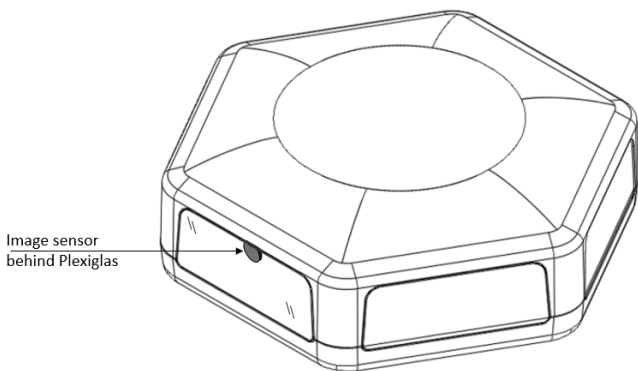


Figure 3.1-1: View of the device showing the built-in camera (without mounting plate)

- The housing contains all the hardware; specifically, the Raspberry Pi board, the Eyepatch board, the memory card / micro SD card, the fan and the image sensor (camera) are housed here.
- The image sensor is located behind a transparent panel, which is inserted into the recess on the side panel. The image sensor faces outwards and at an angle downwards towards the floor.
- The housing features recesses for the USB-C port for the power supply (5 V DC) and for connecting the RJ45 cable (Ethernet cable).

3.2 Functional description

The mobile recording device is designed to be mounted on advertising hoardings.

- People in the immediate vicinity of the advertising hoarding are captured by the camera. This makes it possible to determine the number of people who were in the vicinity of the advertising hoarding.
- Although the images are usually captured in public areas, data protection requirements are met. To this end, the image capture process is modified in such a way that no personal data, such as faces, appears in the captured images.

- For data protection reasons, the images captured by the device's camera or image sensor must be rendered unrecognisable. Only the information necessary for analysis remains in the image after processing (image scrambling). This processing is achieved using Eyepatch technology.
- The device enables the determination of how many people were present within the camera's field of view at any given time over a specific period. The device's 'Eyepatch' module carries out the 'scrambling' of the captured images at the hardware level.
- The captured image data can be stored on the micro SD card inside the device. The data can be transferred via the RJ45 interface to an external device (e.g. a computer) for viewing or analysis.
- This user manual does not cover the functionality of the analysis software, which is installed on a separate device, such as a computer, computer system or server.

3.3 Scope of delivery

The scope of delivery for the device includes the following items:


Pos.	Amount
These operating instructions, including assembly instructions.	1
Eyepatch add-on unit for hardware-based encryption of sensor data, including the SB-Line mounting plate.	1
PS1-class power supply unit from GlobTek Inc.: Model name: GTM46101-1306-0.8-USB, Manufacturer's part number: WR9QA2500USB52NMR6B The required adapter (USB A to USB C) is included.	1

3.4 Views


This section contains various views of the device to aid spatial orientation.

3.4.1 Bottom view of the Eyepatch attachment

The three mounting tabs are used to secure the unit to the mounting plate.

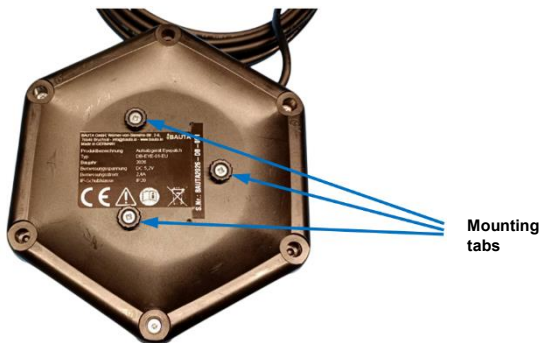


3.4.2 Eyepatch attachment unit, viewed from an oblique angle from above

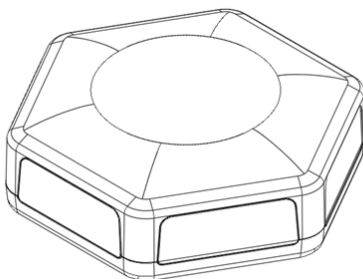

3.4.3 Side view of the Eyepatch attachment

The side view shows the device at its maximum width.

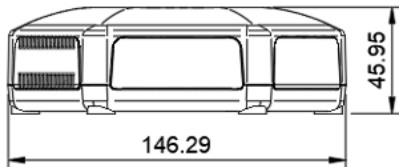

3.5 Types of Use and Operating Modes

3.5.1 Type of Use

The product is intended exclusively for use in the following types of use.

Use for any other purposes is not in accordance with the intended use.

User groups:

- Private users, e.g. non-professionals
- Commercial users

Operating environment:

- In rooms enclosed on all sides

3.5.2 Operating mode

- Automatic mode / Recording mode

3.5.3 Description of the operating mode

- Automatic mode / Recording mode: In this operating mode, the captured images, which have been 'scrambled' by the hardware, are stored on the micro SD card. The data can also be transferred to an external device (in particular a computer, computer system or server).


3.6 Displays and Control Elements

The device contains no displays or control elements. The captured and 'scrambled' images can be stored in the device and transferred via the RJ45 interface to an external device, such as a computer. The data can be displayed and analysed on the external device.

3.7 Usable Interfaces

1. The device's USB-C socket > GlobTek Inc. power supply unit with model number "GTM46101-1306-0.8-USB" (power supply) including USB-A to USB-C adapter.
2. The device's RJ45 socket > Ethernet cable (IT).



The following illustration shows the interfaces of the Eyepatch add-on device.

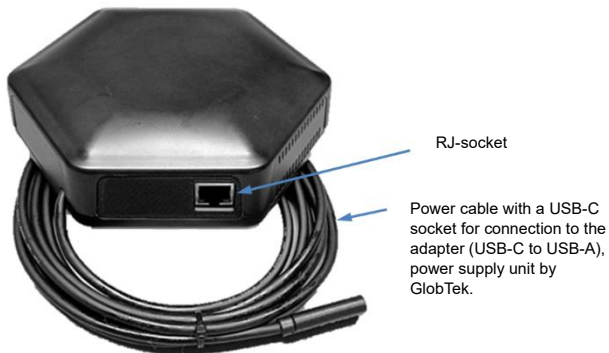

3.8 Type plate

The type plate contains information for identifying the device.

If the type plate is no longer attached to the device, a new one can be created using the information below and affixed to the device. The following illustration shows the type plate in the form of a sticker.

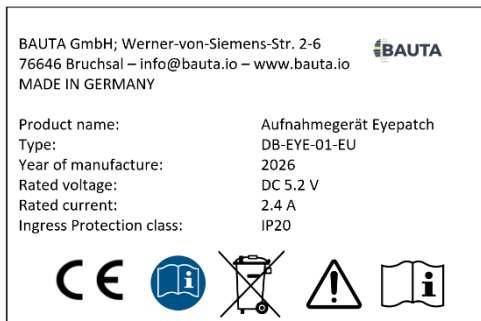

4 Technical Specifications

This section contains technical specifications describing the device.

4.1 Operating Conditions

Time Limits

- Duty cycle: 100%; continuous operation without time limit.

4.2 Dimensions

Dimensions of the Eyepatch attachment:

Length (L) approx. 100 mm, width (W) approx. 100 mm, height (H) approx. 53 mm.

4.3 Mass

Weight of the device, excluding packaging, the mains adaptor and accessories	0,373 kg
Weight of the device, including the mains adaptor, accessories and packaging	Approx. 0.8 kg The device, power supply and accessories are shipped in a cardboard outer box. The device and power supply are additionally wrapped in bubble wrap.

4.4 Energy supply

Electric	The device is powered via USB-C at 5.2 V DC (max. 13 W).
----------	--

4.5 Environmental conditions

4.5.1 Operation

Ambient temperature	0 – 35 °C
Relative humidity	Max. 80%, non-condensing

4.5.2. Transport

Ambient temperature	0 – 50 °C
Relative humidity	Max. 80%, non-condensing

4.5.3 Storage

Ambient temperature	0 – 50 °C
Relative humidity	Max. 80%, non-condensing

5 Safety

This section contains information on the protection of people, pets, farm animals and the environment.

5.1 Intended use

The device is intended exclusively for the following use:

The device is designed to capture images in public areas, whilst taking data protection into account and ensuring that personal data and faces are rendered unrecognisable.

The 'pixelated' images are intended for subsequent analysis to obtain specific information. Only 'pixelated' images may be analysed!

Any other use is not in accordance with the intended purpose and would constitute misuse.

5.2 Areas of Use

The device is intended exclusively for use in the following areas:

- Residential areas, business/commercial premises, small businesses

Use in other areas is not in accordance with the intended purpose.

5.3 Responsibilities and Qualifications of Personnel

Person	Task	Required qualifications
End customer	Installation and commissioning of the unit on request, Operation of the unit	Understanding the installation and operating instructions.
Specialists employed by the manufacturer / specialists commissioned by the manufacturer	Installation and commissioning of the equipment; maintenance of the equipment	A good understanding of the device and its electronics.

5.4 Cyber Security

No measures are required to enhance cyber security.

Even if unauthorised persons were to gain access to the data, the data protection of the individuals recorded would still be safeguarded. In this respect, no further measures are required to improve cyber security.

5.5 Warnings

	
	Risk of fire if an unsuitable mains adaptor is used to power the device! The device must only be powered by a Class PS1 mains adaptor or by the mains adaptor designated 'GTM46101-1306-0.8-USB' from the manufacturer GlobTek Inc.!

6 Installation

This section contains information on how to install the unit safely.

6.1 Required external accessories

The accessories listed below are not included in the scope of delivery and must therefore be purchased separately.

- mounting screws for the mounting plate.

NOTICE

Self-tapping fixing screws with a flat contact surface against the mounting plate (not countersunk screws) may be considered a good option, provided they are suitable for fixing to the relevant advertising medium.

The maximum head heights of the fixing screws must not exceed the depth of the recesses for the fixing screws on the mounting plate.

The diameter of the screw heads must be smaller than the width of the recesses or smaller than the diameter of the recesses for the fixing screws on the mounting plate.

- Suitable tool / screwdriver for the fixing screws.

NOTICE

Depending on the shape and material of the advertising medium, the mounting height of the mounting plate and the type of fixing screws, it may be advisable or necessary to use the following tools:

- Cordless screwdriver for pre-drilling the screw holes or for driving in the screws using the appropriate bit (such as a Phillips or Torx bit) with an appropriate torque limit.
- Ladder / folding step ladder (stable, non-slip).
- Metre stick / folding rule and pencil.
- Spirit level.

6.2 Safety instructions



Installation must only be carried out by persons who possess the necessary knowledge and skills in the use of the required equipment.

When carrying out drilling work, the generally accepted safety and protective measures for hand-held power tools must be observed.

Before starting installation, ensure that there are no cables (electricity, water, data) in the vicinity of the planned drilling points on the advertising structure.

The advertising structure must be sufficiently strong to support the weight of the unit and the fixing elements on a permanent basis.

When using tools, particularly when drilling, the personal protective equipment customary for these activities must be worn and health and safety regulations must be observed.

6.3 Carrying out the installation

Step 1: Identifying a suitable position

Determine a suitable position for the mounting plate on the relevant advertising medium.



Figure 6.3-1: View of the mounting plate from an oblique angle above.

NOTICE

The mounting plate must be positioned so that the image sensor of the Eyepatch add-on device can capture people / prospective customers in the immediate vicinity of the advertising medium, thereby enabling a view of the target scenario to be analysed

Horizontal alignment (tolerance: ± 5 degrees)

Minimum mounting height of the mounting plate: 1.8 m

Maximum mounting height of the mounting plate: 4 m


Recommended mounting height of the mounting plate: 2–2.5 m

The positions for the fixing screws can be marked with a soft pencil.

Step 2: Securing the mounting plate to the advertising surface

Secure the mounting plate using at least two fixing screws. Depending on the type and material of the advertising surface, more than two fixing screws may be required.

The figure below shows the possible mounting points / screw positions.

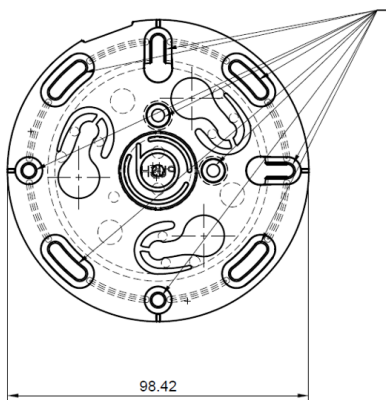

Possible mounting points/drilling points for securing the mounting plate to, for example, an advertising display using screws.

Figure 6.3-2: Top view of the mounting plate showing the mounting points

NOTICE

Use fixing screws that are suitable for the material of the advertising medium. For soft materials, screws with a comparatively deep thread are preferable.


The undersides of the screw heads must be flat, and their diameter (DK) and height (HK) must be smaller than the corresponding dimensions of the recesses □ Screws with DK=6 mm and HK=3 mm are suitable for all the mounting points shown.

Depending on the material of the advertising medium, pre-drilling at the positions for the fixing screws may be advisable □ to prevent cracks from forming when tightening the screws.

Insert the fixing screws through the holes/recesses in the mounting plate and tighten the screws at the positions marked or pre-drilled on the advertising medium.

Step 3: Securing the Eyepatch attachment unit to the mounting plate

To secure the Eyepatch attachment unit to the mounting plate, align the three locking tabs on the underside of the unit with the three mounting positions of the locking receptacles on the mounting plate (see Figure 6.3-3 below). The device is then rotated by a few degrees until it reaches the mechanical stop (see Figure 6.3-4 below). In this final position, the device is positively locked to the mounting plate.

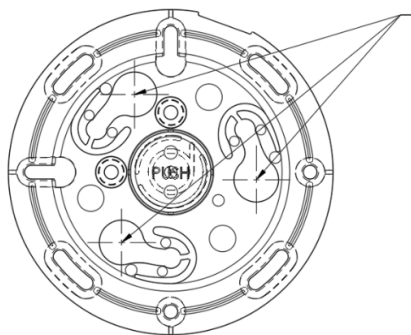

Assembly plate layout showing the positioning points for the locking tabs (intersecting centre lines)

Figure 6.3-3: Top view of the mounting plate showing the snap-fit fittings

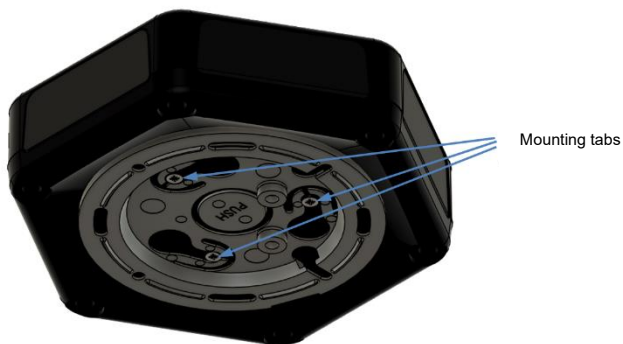


Figure 6.3-4: Bottom view of the mounting plate with the Eyepatch attachment fixed in place. Figure 6.3-4 shows the device's three locking tabs, which are positioned at the end positions of the locking recesses in the mounting plate (connected and locked).

NOTICE

To remove the unit from the mounting plate, rotate it in the opposite direction to that used for securing it until the centre lines of the unit's locking tabs are aligned with the mounting positions for the locking receptacles on the mounting plate (see Figs. 6.3-3 and 6.3-4).

Once in this rotated position, the unit can be removed from the mounting plate by lifting it.

7 Commissioning, Operation and Downtime

7.1 Commissioning

The purpose of commissioning the device is to check its functions and characteristics, and to identify and rectify any faults.

Connect the supplied GlobTek Inc. power supply unit, which comes with a separate adapter (USB A to USB C), to the device by plugging it in.

	The power supply unit itself must not pull on the device; instead, it must be positioned in a way to ensure strain relief on the USB-C power cable! Care must be taken on site to ensure that the connected power supply unit remains securely in place at all times and cannot fall!
---	---

- If there is no power socket in the immediate vicinity of the installed device, a certified USB-C extension cable may be used if necessary. Once the power supply is established, the device starts up and the sensor begins collecting image data.

	Any modifications to the device made by the customer will invalidate the warranty!
---	---

7.2 Operation

- During operation, the sensor captures unrecognisable image data. This is stored on the device's memory card.
- The image data can be transferred to an external analysis unit via the RJ45 socket. There, the image data can be analysed using mathematical analysis methods (various software modules) to extract anonymous information.

7.3 Downtime

	If the appliance is not in use, unplug the mains adaptor from the socket!
---	--

8 Maintenance / Servicing / Repairs

Maintenance, servicing and repairs to the equipment must be carried out exclusively by the manufacturer, BAUTA, or by qualified personnel appointed by BAUTA.

In the event of a fault with the equipment, please contact BAUTA's service department.

8.1 Service address

Name und address	BAUTA GmbH Werner-von-Siemens-Str. 2-6 76646 Bruchsal Deutschland
Mail	info@bauta.io

9 Cleaning

This section contains information on how to clean the appliance safely.

Clean the appliance with a clean, soft and dry microfibre cloth. For stubborn dirt, the microfibre cloth may be dampened with warm water (max. approx. 40°C).

	Risk of damage to the device caused by liquids or chemical cleaning agents. Take care to ensure that no liquids get into the device! Do not use chemical cleaning agents; these could damage the surface of the casing!
--	--

10 Disposal

At the end of its service life, the appliance must be disposed of in accordance with statutory requirements.

NOTICE	EU Directive 2012/19/EU regulates the proper collection, treatment and recycling of used electronic equipment.
	The symbol shown here indicates that, in the interests of environmental protection, the appliance must be disposed of at the end of its service life in accordance with statutory regulations and separately from household or commercial waste! The old appliance can be disposed of via the relevant official collection points, such as the recycling centre, in your region. Further details regarding collection can be obtained from your local authority. Separate collection and recycling help to conserve natural resources and ensure that all regulations regarding the protection of health and the environment are observed when the appliance is recycled. Alternatively, the appliance, including the mains power supply and adapter, can also be returned to the manufacturer for disposal.

11 EU Declaration of Conformity (CE)

The manufacturer

BAUTA GmbH,
Werner-von-Siemens-Straße 2-6,
76646 Bruchsal

hereby declares that the following product

Product name: Aufnahmegerät Eyepatch
Type designation: DB-EYE-01-EU
Year of manufacture: 2026

Complies with all relevant provisions of the applicable legislation (as set out below) – including any amendments in force at the time of this declaration. The manufacturer bears sole responsibility for issuing this declaration of conformity. This declaration relates solely to the equipment in the condition in which it was placed on the market; parts fitted and/or modifications carried out subsequently by the end user are not taken into account.

The following legislation was applied:

EMV-Richtlinie 2014/30/EU
RoHS-Richtlinie 2011/65/EU
Produktsicherheitsverordnung (EU) 2023/988

The notified body Nemko GmbH was commissioned to carry out the full EMC test on the device.

Address and details of Nemko:

Nemko GmbH
Reetzstraße 58
D-76327 Pfinztal
Deutsche Akkreditierungsstelle: D-PL-22131-01-01 / D-PL-22131-01-04

Product or product family standards applied:

EN 55032:2015+AC:2016+A11:2020+A1:2020 (Grenzwertklasse B):

Elektromagnetische Verträglichkeit von Multimediageräten und Einrichtungen - Anforderungen an die Störaussendung (CISPR 32:2015 + COR1:2016 + A1:2019).

EN 55035:2017+A11:2020 (Störfestigkeit):

Elektromagnetische Verträglichkeit von Multimediageräten - Anforderungen zur Störfestigkeit (CISPR 35:2016, modifiziert).

EN IEC 62368-1:2024+A11:2024:

Einrichtungen für Audio/Video-, Informations- und Kommunikationstechnik - Teil 1:
Sicherheitsanforderungen.

Place: Bruchsal

Date: 22.07.2026


A handwritten signature in blue ink, appearing to read 'D. Nikola', is written over a horizontal line.

Signature von Daniel Nikola, CEO of BAUTA GmbH

