

## 1. Description


### 1.1. Project

Project Name	stm32l476-ili9341-example
Board Name	NUCLEO-L476RG
Generated with:	STM32CubeMX 5.3.0
Date	10/14/2019

### 1.2. MCU

MCU Series	STM32L4
MCU Line	STM32L4x6
MCU name	STM32L476RGTx
MCU Package	LQFP64
MCU Pin number	64

## 2. Pinout Configuration

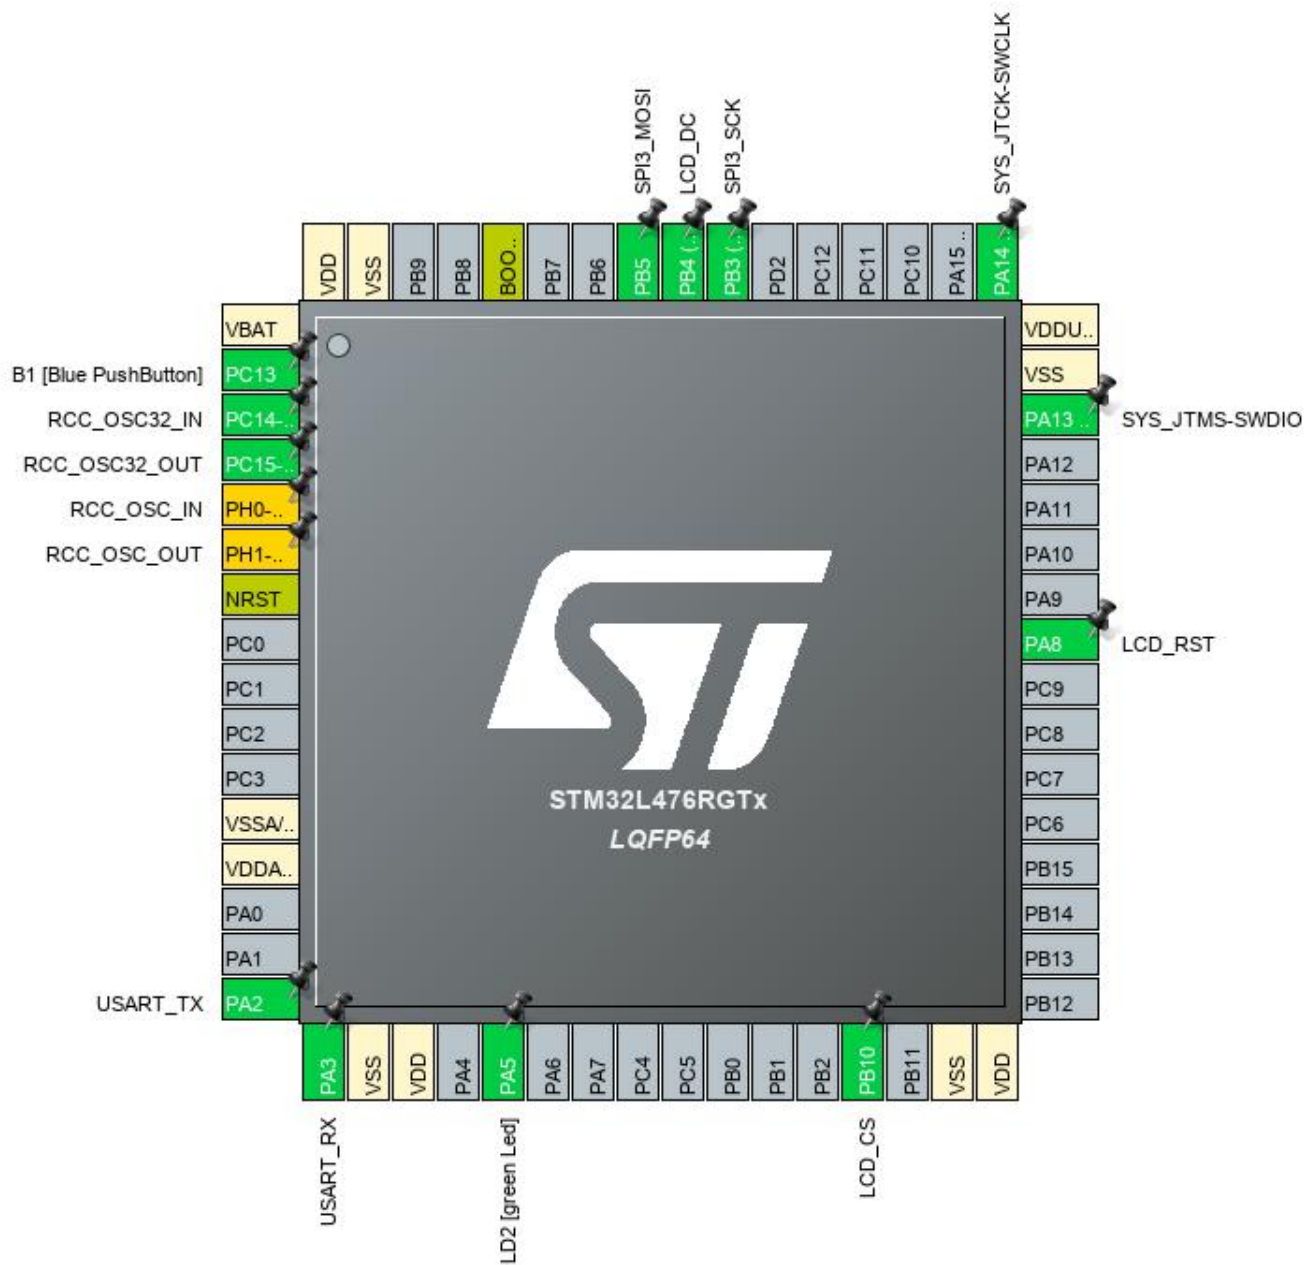

### 3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN (PC14)	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT (PC15)	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN (PH0) *	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT (PH1) *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA/VREF-	Power		
13	VDDA/VREF+	Power		
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 **	I/O	GPIO_Output	LD2 [green Led]
29	PB10 **	I/O	GPIO_Output	LCD_CS
31	VSS	Power		
32	VDD	Power		
41	PA8 **	I/O	GPIO_Output	LCD_RST
46	PA13 (JTMS-SWDIO)	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDDUSB	Power		
49	PA14 (JTCK-SWCLK)	I/O	SYS_JTCK-SWCLK	
55	PB3 (JTDO-TRACESWO)	I/O	SPI3_SCK	
56	PB4 (NJTRST) **	I/O	GPIO_Output	LCD_DC
57	PB5	I/O	SPI3_MOSI	
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

\*\* The pin is affected with an I/O function

\* The pin is affected with a peripheral function but no peripheral mode is activated



## 5. Software Project

### 5.1. Project Settings

Name	Value
Project Name	stm32l476-ili9341-example
Project Folder	D:\projects\STM32-ILI9341\stm32l476-ili9341-example
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_L4 V1.14.0

### 5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

## 6. Power Consumption Calculator report

### 6.1. Microcontroller Selection

Series	STM32L4
Line	STM32L4x6
MCU	STM32L476RGTx
Datasheet	025976_Rev4

### 6.2. Parameter Selection

Temperature	25
Vdd	3.0

## 7. IPs and Middleware Configuration

### 7.1. RCC

#### Low Speed Clock (LSE) : Crystal/Ceramic Resonator

##### 7.1.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	<b>Enabled *</b>
Data Cache	Enabled
Flash Latency(WS)	4 WS (5 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
MSI Calibration Value	0
MSI Auto Calibration	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

###### Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

### 7.2. SPI3

#### Mode: Transmit Only Master

##### 7.2.1. Parameter Settings:

###### Basic Parameters:

Frame Format	Motorola
Data Size	<b>8 Bits *</b>
First Bit	MSB First

###### Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	<b>40.0 MBits/s *</b>
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

###### Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

### 7.3. SYS

**Debug: Serial Wire**

**Timebase Source: SysTick**

### 7.4. USART2

**Mode: Asynchronous**

#### 7.4.1. Parameter Settings:

##### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

##### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

##### Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

**\* User modified value**



## 8. System Configuration

### 8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14-OSC32_IN (PC14)	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT (PC15)	RCC_OSC32_OUT	n/a	n/a	n/a	
SPI3	PB3 (JTDO-TRACESW0)	SPI3_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PB5	SPI3_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
SYS	PA13 (JTMS-SWDIO)	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14 (JTCK-SWCLK)	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_RX
Single Mapped Signals	PH0-OSC_IN (PH0)	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT (PH1)	RCC_OSC_OUT	n/a	n/a	n/a	
GPIO	PC13	GPIO_EXTI13	<b>External Interrupt Mode with Falling edge trigger detection</b>	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High *	LD2 [green Led]
	PB10	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High *	LCD_CS
	PA8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High *	LCD_RST
	PB4 (NJTRST)	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High *	LCD_DC

## **8.2. DMA configuration**

nothing configured in DMA service

### 8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/35/36/37/38	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USART2 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
SPI3 global interrupt	unused		
FPU global interrupt	unused		

\* User modified value

## 9. *Software Pack Report*