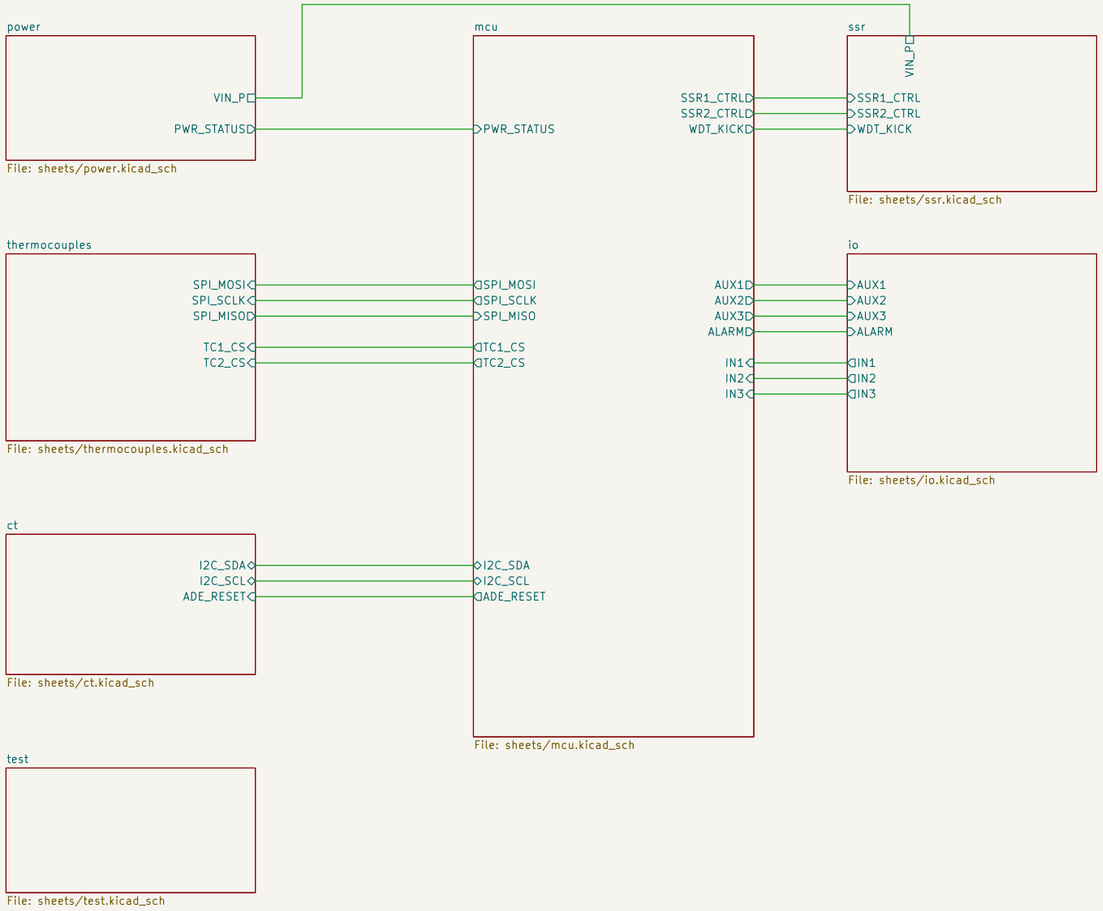


NOTES — Bisque kiln controller, rev B

SSR terminals J4/J9: pin1 = VIN_P (24 V, fused and TVS-clamped, ALWAYS LIVE), pin2 = the switched low side. The watchdog gates the shared return (Q7), not the supply, so a tripped watchdog leaves 24 V on pin 1 and opens pin 2. Boot-safe: R7/R20 hold each gate down while the optos are dark.
The optos are NOT an isolation barrier — both sides share GND.
Rev B's opto-ISOLATED design was reverted and stays reverted; U8/U9 are here to keep a 24 V gate fault off the GPIO.
Per channel <=200 mA: F1 holds at 750 mA and U11 takes ~250.

TC1 terminal J3 / TC2 terminal J8: pin1 = K+, pin2 = K- — both float, biased near AGND only through each MAX31856's internal BIAS network. Ungrounded-junction probes required; two grounded-junction probes in one kiln would loop through it.

Nav switch J6 is panel-mounted; inputs use ESP32 pull-ups.

J11: IN1/IN2/IN3 (lid/gas-flow/spare) + GND — dry contact each channel to GND.

Display J5 (14-pin, ST7796S + XPT2046 touch module, LCDWIKI MSP4021): 1=+5V 2=GND 3=CS 4=RST 5=DC 6=SDI/MOSI 7=SCK 8=BL 9=SDO/MISO 10=T_CLK 11=T_CS 12=T_DIN 13=T_DO 14=T_IRQ.
PIN 1 IS +5V, NOT 3V3 — the module regulates on board; do not wire a 3.3V-only panel to it. Logic is 3.3V; touch shares SPI2 with the LCD and both MAX31856s (R39-R43 damping). LCD_RST is GPIO46, a boot-strapping pin: the MSP4021 has NO pull-up on its RESET line (QDtech schematic, 2019-09-27), so download mode is unaffected — check that before substituting another module.

J12: CT current inputs, CTA_P/CTA_N/CTB_P/CTB_N — one CT clamp per SSR zone.

J13: DNP SELV voltage sense header. NOT mains-rated, not fitted — do not wire to AC mains. Y1 is a packaged 3.579545 MHz oscillator (no load caps; C25 is its bypass) — see DESIGN-NOTES.md, Y1. ADE7953 I2C address 0x38 would collide with a PCF8574A added on J7/J14.

Design reasoning per block: hardware/kicad/DESIGN-NOTES.md.
Designators C8, C9, C26, D1, D2 and Q1 are retired, not missing: they are kept free so the notes and reviews still read.

4-layer, 100 x 100 mm, JLCPCB standard process
ESP32-S3-WROOM-1U-N16R2 + 2x MAX31856 + dual SSR + ADE7953

Bisque project


Sheet: /
File: bisque-controller.kicad_sch


Title: Bisque Kiln Controller


Size: A3	Date: 2026-10-22	**Rev: B.4**
KiCad E.D.A. 10.0.7		Id: 1/8

POWER IN 24 VDC terminal or USB
F1+D8 clamp-and-blow at the entry. Q8 blocks reverse polarity as a P-FET, not a diode: its body diode conducts on correct polarity and the gate then pulls itself on through R62, clamped by D11 because 24 V is twice the AO3401A's V_GS rating. U11 (right) makes BUCK_5V; U12 selects between it and USB VBUS to make +5V, giving the buck PRIORITY via R63/R64 rather than letting the higher voltage win -- a 5.25 V host would otherwise source the SSR terminals and the relay bank. U12 also blocks USB back-feeding the unpowered buck. C47/C48 are its input caps, one per channel, at the pins. C50 is the VBUS bulk by J1: U4 steers USB ESD into VBUS, and 3.2 uF at 5 V holds an 8 kV contact discharge to ~0.3 V on a pin rated 6 V.
U2 drops +5V to +3V3

24 V -> 5 V BUCK XL1509-5.0, fixed output (LM2596 class)
C41/C42 in (1210 X7R: 3.1 uF each AT 24 V - a 1206 10 uF held 1.35), D7 catch, L1 47uH, C44 + C46 out. FB ties to the output because the part is the fixed 5.0 V version; EN is active LOW and grounded.
C46 is a LOW-IMPEDANCE ELECTROLYTIC on purpose, 0.36 ohm AT 100 kHz: voltage-mode with fixed compensation leans on its ESR zero (4.4 kHz), and ONE ceramic only - a second 22 uF shorts that zero out at 16 kHz.
Rated for 1.0 A out at 50 C ambient; stability is a bench item.
Keep C41/C42 - U11 - D7 - L1 tight: that loop, not L1, is what radiates.

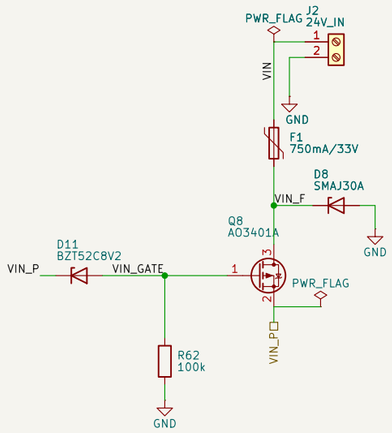


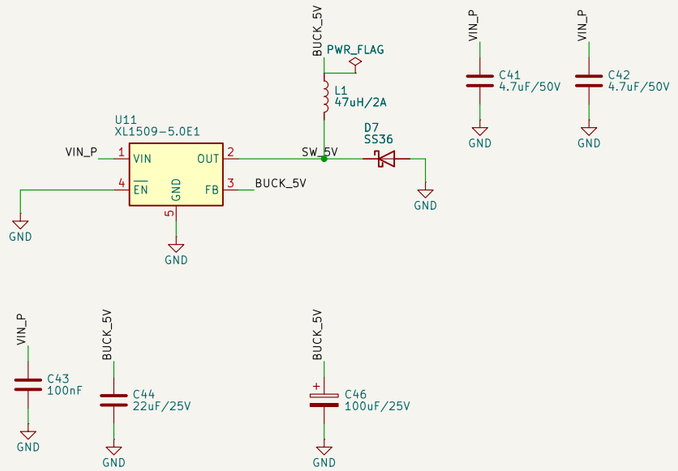


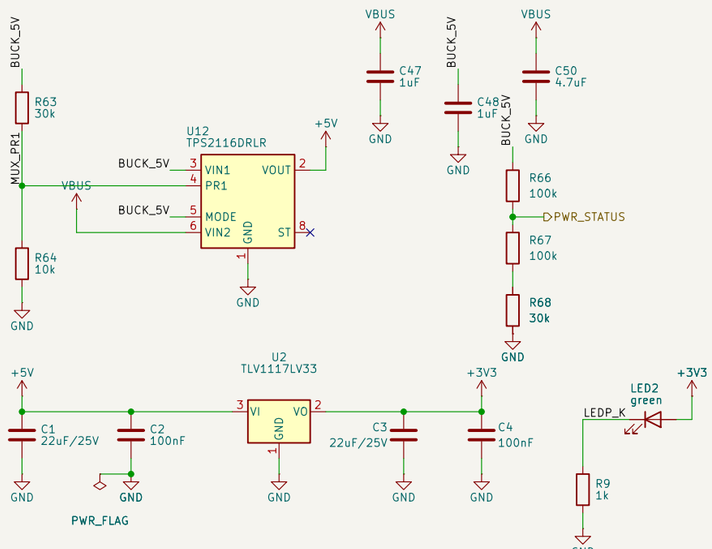


4-layer, 100 x 100 mm, JLCPCB standard process
ESP32-S3-WROOM-1U-N16R2 + 2x MAX31856 + dual SSR + ADE7953
Bisque project
Sheet: /power/
File: power.kicad_sch
Title: Bisque Kiln Controller - Power input and 24 V -> 5 V buck
Size: A3 | Date: 2026-10-22 | **Rev: B.4**
KiCad E.D.A. 10.0.7 | Id: 2/8

USB-C
native USB flashing + ESD

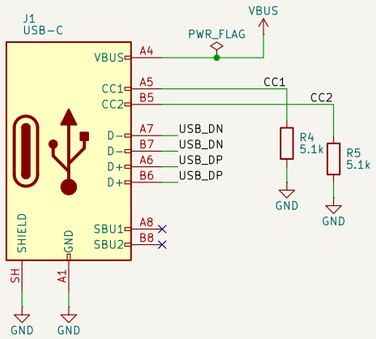





ESP32-S3-WROOM-1U-N16R2
GPIOs = firmware Kconfig defaults
R2 (quad PSRAM) or N16 modules only: GPIO35/36 are PSRAM DQ4/DQ5 on R8

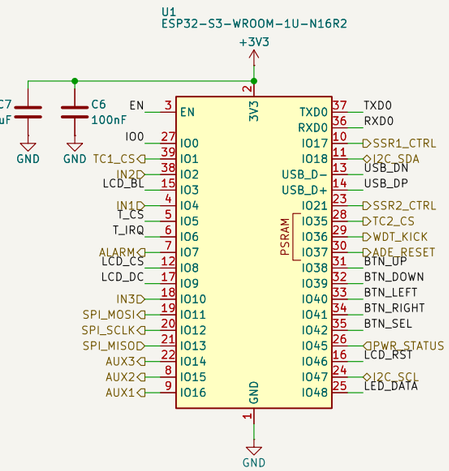


HEADERS
J5 display+touch (14-pin), J6 nav, J7 aux+I2C

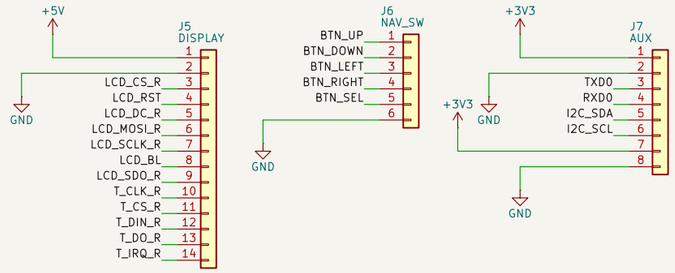


RESET / BOOT / +5V BULK (C11)

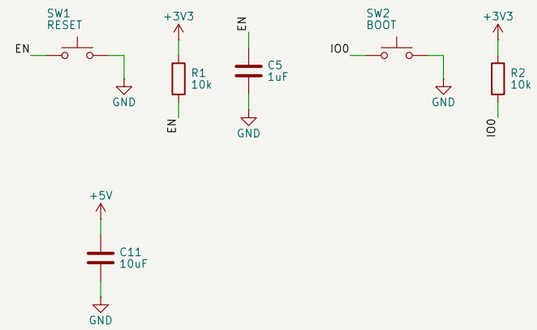


WS2812B STATUS LED
VDD dropped ~4.6V for 3.3V data margin



SPI BUS DAMPING + CHIP-SELECT PULL-UPS + I2C EXPANSION
R39-R43 damp the display module's XPT2046 touch lines and R54-R58 the four 40 MHz display lines; both loom to J5.
R56 is also the SDO hedge - lift it if the panel does not tri-state J5.9 off the shared SPI_MISO.
R50-R53 hold all four chip selects deasserted from power-on, before firmware configures any GPIO.
J14 Qwiic and J7 5-8 (0.1 in) share I2C, pulled up by R44/R45

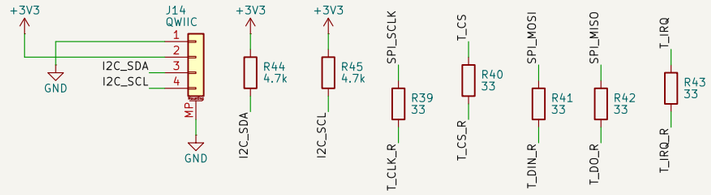

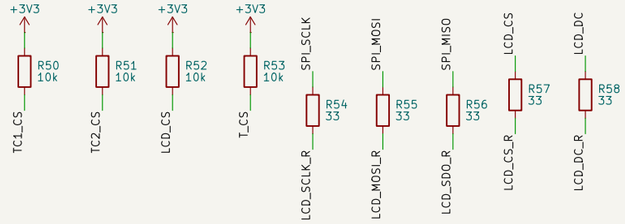


SIGNAL TEST POINTS
SPI, I2C and the two SSR control lines, beside their nets




4-layer, 100 x 100 mm, JLCPCB standard process
ESP32-S3-WROOM-1U-N16R2 + 2x MAX31856 + dual SSR + ADE7953
Bisque project
Sheet: /mcu/
File: mcu.kicad_sch
Title: Bisque Kiln Controller - ESP32-S3, USB, headers, status LED

Size: A3	Date: 2026-10-22	**Rev: B.4**
KiCad E.D.A. 10.0.7		Id: 3/8

THERMOCOUPLE 1 (control) MAX31856
T− floats to J3, biased via BIAS

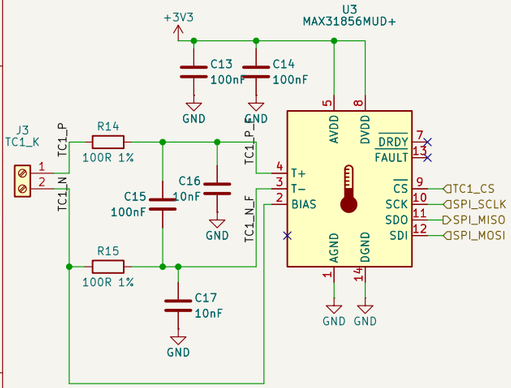

THERMOCOUPLE 2 (load) MAX31856
T− floats to J8, biased via BIAS

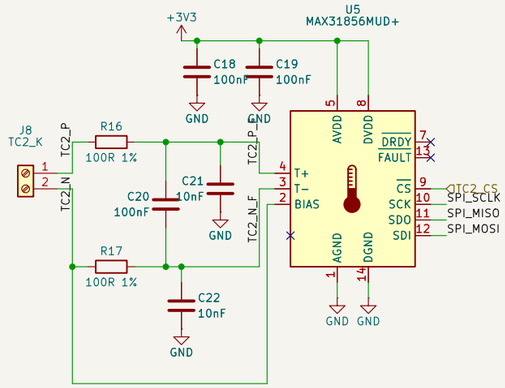


4−layer, 100 x 100 mm, JLCPCB standard process
ESP32−S3−WROOM−1U−N16R2 + 2x MAX31856 + dual SSR + ADE7953
Bisque project


Sheet: /thermocouples/
File: thermocouples.kicad_sch


Title: Bisque Kiln Controller − Thermocouple front−ends

Size: A3	Date: 2026−10−22	**Rev: B.4**
KiCad E.D.A. 10.0.7		Id: 4/8


SSR DRIVE x2 — HIGH SIDE, GROUND-REFERENCED (rev B.4)
Each terminal's + is switched by a 60 V P-channel LP2309LT1G (Q5/Q6)
off SSR_24V; the − pin is board GND, so an SSR lead chafed onto the
earthed enclosure is a non-event, not a bypass. The GPIO drives an opto
LED, never a gate: at 24 V a gate-to-drain failure would put 240 mA
into the pin. The opto pulls the gate down through 10k (R69/R70); the
8.2 V zener (D13/D14) sets V_SG from the rail, not from CTR, and R7/R20
hold the gate at the source against the opto's dark current. D9/D10
freewheel a contactor coil; LED3/LED4 read the terminal itself.
NOT an isolation barrier — see DESIGN-NOTES.md (SSR block).

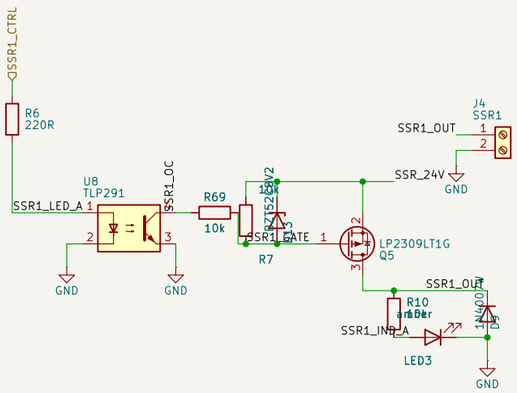

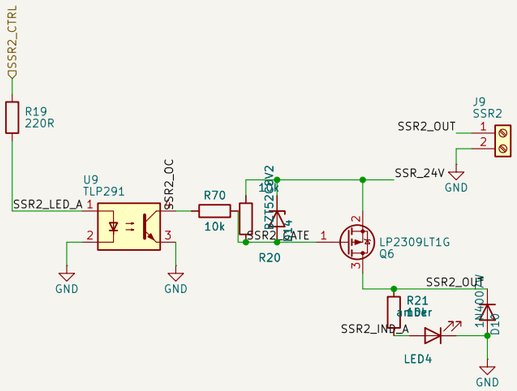

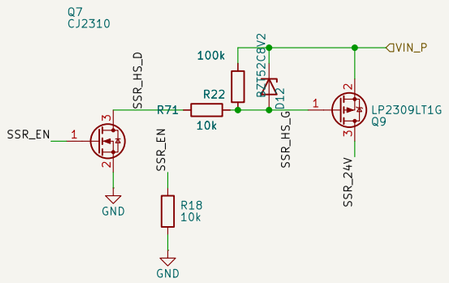

HARDWARE WATCHDOG
U10 retriggerable one-shot: every rising edge on WDT_KICK restarts a
~2.2 s window, so Q stays high only while firmware keeps kicking.
Q holds Q3 on; Q3 pulls SSR_PG down, turning on high-side Q4, which
supplies SSR_EN (+5 V). SSR_EN enhances Q7, which pulls the gate of the
24 V high-side switch Q9 down through R71 (D12 clamps V_SG to 8.2 V);
Q9 feeds SSR_24V to both channels. Window expired: SSR_EN falls, R22
pulls Q9's gate to its source, SSR_24V is dead and both terminals are
off whatever the channel switches are doing. R46/C38/C49 set the window.
R48 holds B low when the MCU is high-Z. R47 is the fail-safe pull-up.
SJ2 = bring-up defeat, REMOVE for service.

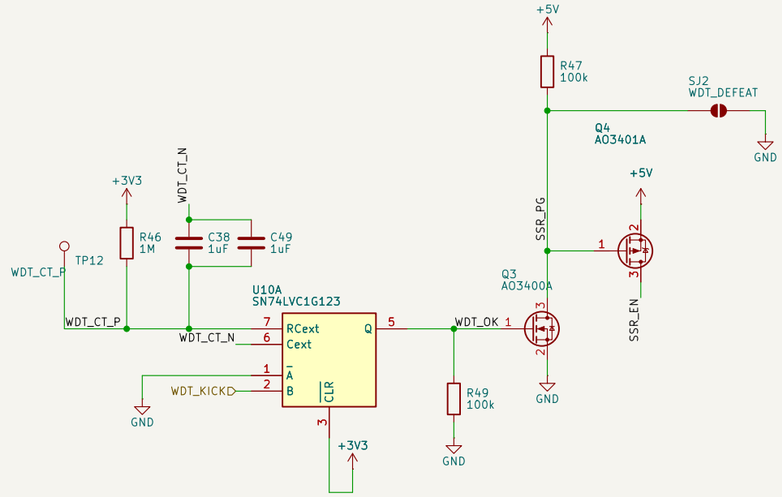


4-layer, 100 x 100 mm, JLCPCB standard process
ESP32-S3-WROOM-1U-N16R2 + 2x MAX31856 + dual SSR + ADE7953
Bisque project
Sheet: /ssr/
File: ssr.kicad_sch


Title: Bisque Kiln Controller — SSR drive and hardware watchdog

Size: A3	Date: 2026-10-22	**Rev: B.4**
KiCad E.D.A. 10.0.7		Id: 5/8


AUX OUTPUT BANK
ULN2003 vent/purge/spare; COM->AUX_VP, SJ1 links to +5V

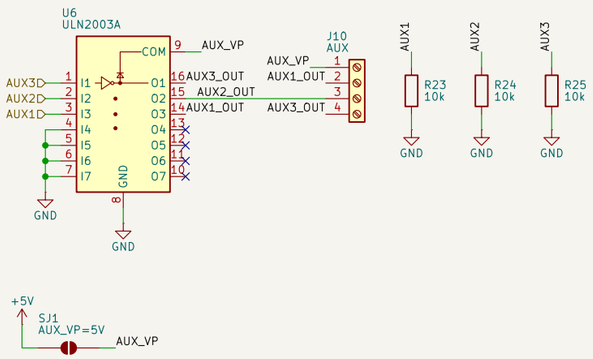

ALARM BUZZER

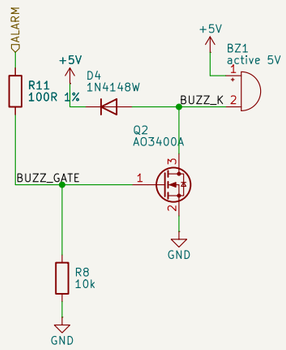

PROTECTED INPUTS x3 lid / gas-flow / spare
1k + 10k pull-up + 100nF each, SRV05-4 TVS

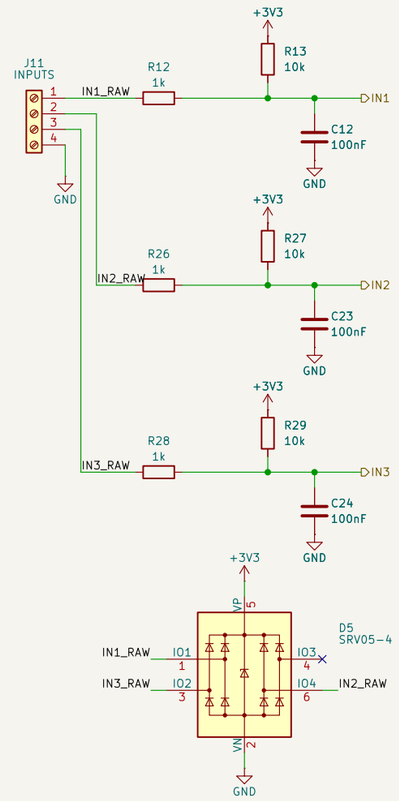

4-layer, 100 x 100 mm, JLCPCB standard process
ESP32-S3-WROOM-1U-N16R2 + 2x MAX31856 + dual SSR + ADE7953


Bisque project


Sheet: /io/
File: io.kicad_sch


Title: Bisque Kiln Controller — Aux outputs, buzzer, protected inputs

Size: A3	Date: 2026-10-22	**Rev: B.4**
KiCad E.D.A. 10.0.7		Id: 6/8

CT CURRENT SENSING ADE7953, I2C, current-only
no mains — VP/VN held at GND by R60/R61

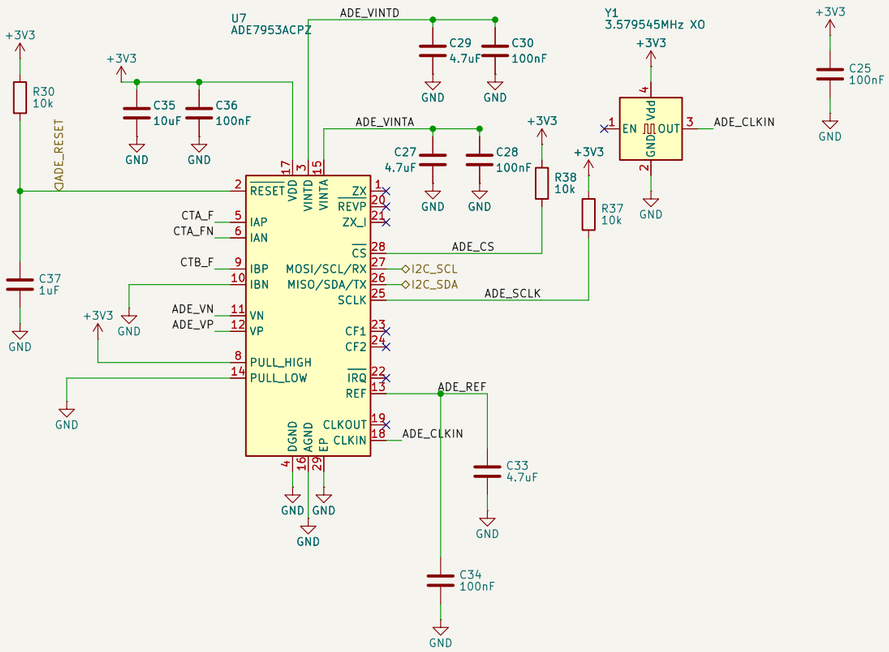



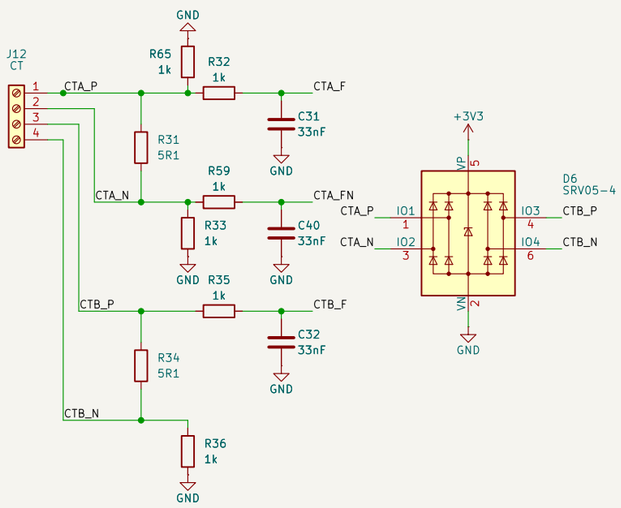


4-layer, 100 x 100 mm, JLCPCB standard process	
ESP32-S3-WROOM-1U-N16R2 + 2x MAX31856 + dual SSR + ADE7953	
Bisque project	
Sheet: /ct/	
File: ct.kicad_sch	
Title: Bisque Kiln Controller — CT current sensing (ADE7953)	
Size: A3	Date: 2026-10-22
KiCad E.D.A. 10.0.7	Id: 7/8

TEST POINTS



MOUNTING / FIDUCIALS

FID1–3 are bare-copper pick-and-place targets, on no net



4-layer, 100 x 100 mm, JLCPCB standard process
ESP32-S3-WROOM-1U-N16R2 + 2x MAX31856 + dual SSR + ADE7953

Bisque project

Sheet: /test/
File: test.kicad_sch

Title: Bisque Kiln Controller — Test points and mounting

Size: A3	Date: 2026-10-22	**Rev: B.4**
KiCad E.D.A. 10.0.7		Id: 8/8