1. This question carries 40% of the mark.

(a) Consider each of the following continuous-time signals. For each case, specify if the signal is causal/non-causal, periodic/non-periodic, odd/even. If the signal is periodic specify its period.

(i) $x(t) = |\sin(2\pi t)|$ **[2]**

Answer

Non-causal, periodic with period $T = 1/2$, even

(ii) $x(t) = e^{t^2}$ **[2]**

Answer

Non-causal, non-periodic, even

Most students answered this question correctly.

(b) Consider the signal

$$x(t) = \begin{cases} 1 - 2t, & 0 \le t \le 1 \\ 0, & \text{otherwise} \end{cases}$$

Now sketch each of the following signals and describe briefly in words how each of the signals can be derived from the original signal $x(t)$.

(i) $x\left(-\frac{t}{5} + 1\right)$ **[2]**

(ii) $x(3t + 5)$ **[2]**

Answers for both (i) and (ii)

$$x\left(-\frac{t}{5} + 1\right)$$


$$= \begin{cases} 1 - 2\left(-\frac{t}{5} + 1\right) = \frac{2t}{5} - 1, & 0 \le -\frac{t}{5} + 1 \le 1 \Rightarrow -5 \le -t \le 0 \Rightarrow 0 \le t \le 5 \\ 0 & \text{otherwise} \end{cases}$$

$$x(3t + 5)$$

$$= \begin{cases} 1 - 2(3t + 5) = -6t - 9, & 0 \le 3t + 5 \le 1 \Rightarrow -5 \le 3t \le -4 \Rightarrow -\frac{5}{3} \le t \le -\frac{4}{3} \\ 0 & \text{otherwise} \end{cases}$$

Most students answered this question correctly. However, the various flaws presented were more in number than what I would have expected.

(c) By applying the property of convolution, find the system's output (i.e., zero-state response) given that the impulse response is $h(t) = e^{-2t}u(t)$ and that the input $f(t)$ is as shown in Figure 1(c) below.



[6]

Figure 1(c)

© Imperial College London

Answer

$h(t) = e^{-2t}u(t)$

$f(t) = \begin{cases} 1, & 0 \le t \le 1 \\ 0 & \text{otherwise} \end{cases}$

$y(t) = h(t) * f(t)$

$= \int_{-\infty}^{\infty} h(\tau)f(t-\tau)d\tau \Rightarrow y(t) = \int_{-\infty}^{\infty} e^{-2\tau}u(\tau)f(t-\tau)d\tau = \int_{0}^{\infty} e^{-2\tau}f(t-\tau)d\tau$

$f(t-\tau) = \begin{cases} 1, & 0 \le t-\tau \le 1 \Rightarrow -1 \le \tau - t \le 0 \Rightarrow t-1 \le \tau \le t \\ 0 & \text{otherwise} \end{cases}$

For $t < 0$ the convolution is zero.

For $t - 1 \le 0 \le t$ which means $0 \le t \le 1$ we have

$y(t) = \int_0^t e^{-2\tau}d\tau = \frac{1}{2} - \frac{1}{2}e^{-2t}$

For $t \ge 1$ we have $y(t) = \int_{t-1}^{t} e^{-2\tau}d\tau = \frac{1}{2}e^{-2(t-1)} - \frac{1}{2}e^{-2t} = \frac{1}{2}e^{-2t}(e^2 - 1)$

Therefore, the convolution is

$$y(t) = \begin{cases} \frac{1}{2} - \frac{1}{2}e^{-2t}, & 0 \le t \le 1 \\ \frac{1}{2}e^{-2t}(e^2 - 1) & t \ge 1 \end{cases}$$

A substantial number of students answered this question correctly. Strangely, some students gave only half of the answer.

(d) (i) Use the time-shifting property to show that if $x(t) \Leftrightarrow X(\omega)$, then $x(t+T) + x(t-T) \Leftrightarrow 2X(\omega)\cos T\omega$. **[3]**

Answer

$\mathcal{F}\{x(t+T)\} = X(\omega)e^{j\omega T}$

$\mathcal{F}\{x(t-T)\} = X(\omega)e^{-j\omega T}$

Hence,

$x(t+T) + x(t-T) \Leftrightarrow 2X(\omega)\cos T\omega$

Basically, all students answered this question correctly.

(ii) Use the result in (d) (i) above to find the Fourier transform of the signal shown in **Figure (d)(ii)** below.

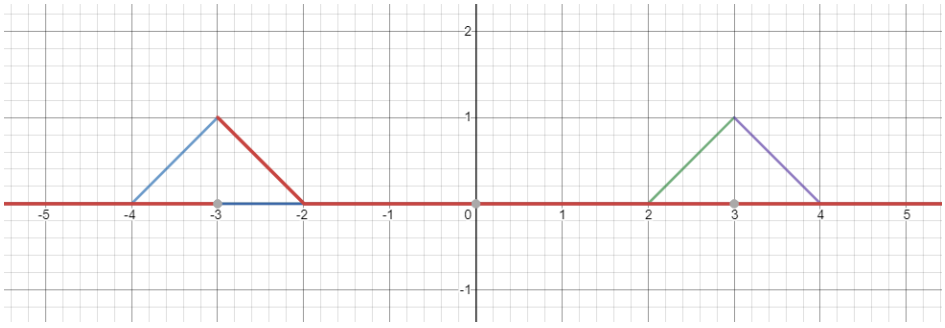


Figure 1(d)(ii)

Use the fact that $\Delta\left(\frac{t}{\tau}\right) \Leftrightarrow \frac{\tau}{2}\text{sinc}^2\left(\frac{\omega\tau}{4}\right)$ with

$$\Delta(x) = (1 - 2|x|)(u\left(x + \frac{1}{2}\right) - u\left(x - \frac{1}{2}\right))$$

[3]

© Imperial College London

Answer

In the particular case, $\tau = 2$ and $x(t) = \Delta\left(\frac{t}{2}\right) \Leftrightarrow \text{sinc}^2\left(\frac{\omega}{2}\right)$.

Furthermore, $T = 3$. Therefore,

$x(t+3) + x(t-3) \Leftrightarrow 2X(\omega)\cos 3\omega = 2\text{sinc}^2\left(\frac{\omega}{2}\right)\cos 3\omega$

Many students missed perfection in the answer; there were various flaws including the argument of sinus squared (for example ω instead of $\frac{\omega}{2}$), the argument of the cosine and also the factor 2.

(e) The output $y(t)$ of a continuous-time LTI system is related to the input $x(t)$ by the differential equation $\frac{dy(t)}{dt} + 4y(t) = 2x(t)$.
Sketch the Bode plots of the system. Detailed explanation is required. **[5]**

Answer

The transfer function is: $H(s) = \frac{2}{s+4}$.

We substitute $s = j\omega$. Then, we obtain $H(j\omega) = \frac{2}{j\omega+4} = \frac{1/2}{\frac{j\omega}{4}+1}$.

Amplitude response: $|H(j\omega)| = \frac{1/2}{\sqrt{\frac{\omega^2}{16}+1}}$.

Phase response: $\angle H(j\omega) = \Phi(\omega) = -\tan^{-1}\left(\frac{\omega}{4}\right)$.

The log amplitude is $20\log\left(\frac{1}{2}\right) - 20\log\left|1 + \frac{j\omega}{4}\right| = -20\log 2 - 20\log\left|1 + \frac{j\omega}{4}\right|$


- $\omega \ll 4 \Rightarrow -20\log 2 - 20\log\left|1 + \frac{j\omega}{4}\right| \approx -20\log 2 - 20\log 1 = -20\log 2 = -6.02$
- $\omega \gg 4 \Rightarrow -20\log 2 - 20\log\left|1 + \frac{j\omega}{4}\right| \approx -20\log 2 - 20\log\left(\frac{\omega}{4}\right) = -20\log\omega + 20\log 2$

This represents a straight line (when plotted as a function of u, the log of ω) with a slope of $-20dB/$decade or $-20(0.301) = -6.02dB/$octave. The exact log amplitude for this pole is:

$$-20\log\left|1 + \frac{j\omega}{2}\right| = -20\log\left(1 + \frac{\omega^2}{4}\right)^{\frac{1}{2}} = -10\log\left(1 + \frac{\omega^2}{4}\right)$$

For the phase we have:


- $\angle H(j\omega) = -\angle\left(1 + \frac{j\omega}{4}\right) = -\tan^{-1}\left(\frac{\omega}{4}\right)$.
- $\omega \ll 4 \Rightarrow \frac{\omega}{4} \ll 1 \Rightarrow -\tan^{-1}\left(\frac{\omega}{4}\right) \approx 0$
- $\omega \gg 4 \Rightarrow \frac{\omega}{4} \gg 1 \Rightarrow -\tan^{-1}\left(\frac{\omega}{4}\right) \approx -90^{\circ}$

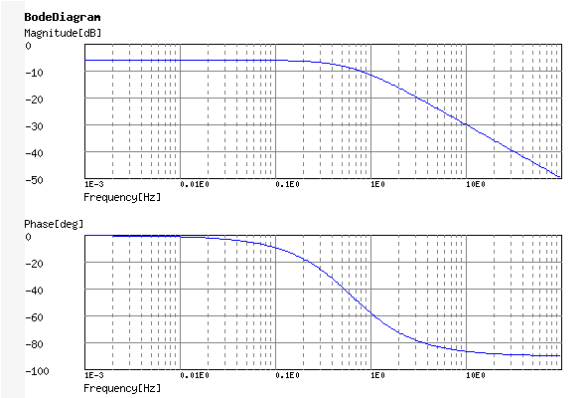

 © Imperial College London

Many students presented the curves either without or with very brief or poor mathematical analysis.

(f) Figures (a) and (b) below show the Fourier spectra of signals $f_1(t)$ and $f_2(t)$. Determine the Nyquist sampling rates for signals $f_1(t)$ and $f_2(t)$. (Hint: Use the frequency convolution and the width property of the convolution.)

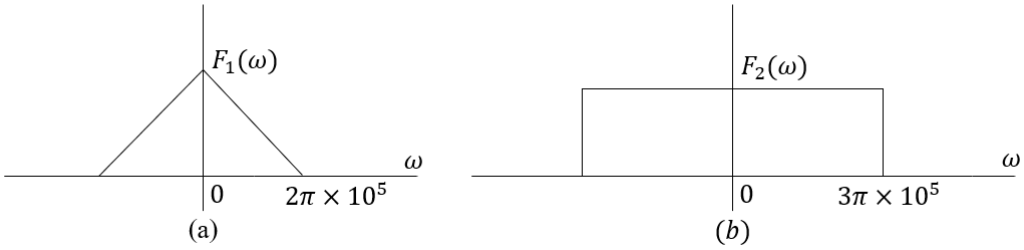

(i) $f_1(t)$ **[2]**

Answer

Bandwidth of $f_1(t)$ is 100kHz and Nyquist rate is 200kHz.

(ii) $f_2(t)$ **[2]**

Answer

Bandwidth of $f_2(t)$ is 150kHz and Nyquist rate is 300kHz.

(iii) $f_2^2(t)$ **[2]**

Answer

The Fourier Transform of $f_2^2(t)$ is $\frac{1}{2\pi}F_2(\omega) * F_2(\omega)$. From the property regarding the size of convolution we see that the bandwidth of $f_2^2(t)$ is twice the bandwidth of $f_2(t)$, i.e., 300kHz. The Nyquist rate is therefore, 600kHz.

(iv) $f_1^3(t)$ **[2]**

Answer

The Fourier Transform of $f_1^3(t)$ is $\frac{1}{2\pi}\left(\frac{1}{2\pi}F_1(\omega) * F_1(\omega)\right) * F_1(\omega) = \frac{1}{4\pi^2}F_1(\omega) * F_1(\omega) * F_1(\omega)$. From the property regarding the size of convolution we see that the bandwidth of $f_1^3(t)$ is three times the bandwidth of $f_1(t)$, i.e., 300kHz. The Nyquist rate is therefore, 600kHz.

(v) $f_1(t)f_2^2(t)$ **[2]**

Answer

Based on the above the bandwidth of $f_1(t)f_2^2(t)$ is the sum of the individual bandwidths, i.e., 400kHz. The Nyquist rate is therefore, 800kHz.

In general, many students answered these questions correctly. However, a non-negligible number of students presented the answers without any explanation at all.

(g) Consider the discrete-time, causal LTI system with input $x[n]$ and output $y[n]$ related with the difference equation:

$$y[n] - \frac{9}{20}y[n-1] + \frac{1}{20}y[n-2] = x[n] - \frac{1}{4}x[n-1]$$

© Imperial College London

(i) Find the analytical expression and the Region of Convergence (ROC) of the $z-$transform of the impulse response of the above system. **[3]**

(ii) Find the analytical expression and the Region of Convergence (ROC) of the $z-$transform of the output if $x[n] = \left(\frac{1}{3}\right)^n u[n]$. **[2]**

Answer

(i)

$$Y(z) - \frac{9}{20}z^{-1}Y(z) + \frac{1}{20}z^{-2}Y(z) = X(z) - \frac{1}{4}z^{-1}X(z)$$

$$Y(z)(1 - \frac{9}{20}z^{-1}Y(z) + \frac{1}{20}z^{-2}) = X(z)(1 - \frac{1}{4}z^{-1})$$

$$Y(z)(1 - \frac{1}{4}z^{-1})(1 - \frac{1}{5}z^{-1}) = X(z)(1 - \frac{1}{4}z^{-1}) \Rightarrow$$

$$Y(z)\left(1 - \frac{1}{5}z^{-1}\right) = X(z) \Rightarrow \frac{Y(z)}{X(z)} = \frac{1}{\left(1 - \frac{1}{5}z^{-1}\right)} \Rightarrow H(z) = \frac{z}{z - 1/5}$$

$h[n] = \left(\frac{1}{5}\right)^n u[n]$, $|z| > 1/5$, causal system

In general, many students answered this question correctly. However, most students presented also the anti-causal version of the impulse response which has the same $z-$transform, although the question specifies that the system is causal.

(ii)

$X(z) = \frac{z}{z-1/3}$, $|z| > 1/3$

$Y(z) = \frac{z^2}{\left(z-\frac{1}{5}\right)\left(z-\frac{1}{3}\right)}$, ROC: $|z| > \frac{1}{5} \cap |z| > \frac{1}{3} = |z| > \frac{1}{3}$

In general, many students answered this question correctly. However, most students did not provide a final ROC.

© Imperial College London

2. This question carries 30% of the mark.

(a) (i) Find the analytical expression and the Region of Convergence (ROC) of the Laplace transform of the continuous-time signal $x(t) = -ae^{-at}u(t) + e^{-at}\delta(t)$, with a real and positive and $u(t)$ the continuous-time unit step function. **[5]**

Answer

$$X(s) = -a\int_{-\infty}^{\infty} e^{-at}u(t)e^{-st}dt + \int_{-\infty}^{\infty} e^{-at}\delta(t)e^{-st}dt = -a\int_{0}^{\infty} e^{-at}e^{-st}dt + 1 =$$

$$\frac{e^{-(s+a)t}}{-(s+a)}\Big|_0^{\infty} + 1 = -a\frac{1}{s+a} + 1 = \frac{s}{s+a}, \text{ ROC: Re}\{s\} > -a$$

In general, many students answered this question correctly. However, a substantial number of students did not provide a correct answer; there were flaws wither in the analytical expression or in the ROC.

(ii) Explain why the Laplace function is not adequate to determine the corresponding function in time. **[2]**

Answer

The Laplace transform function is not adequate since two functions in time can have the same Laplace transforms. The ROCs are required too. A specific example must be given by the students.

In general, many students answered this question correctly, but very few students provided specific examples.

(iii) Find the analytical expression and the Region of Convergence (ROC) of the Laplace transform of the signal $\delta(t-a)$, with a real and positive and $\delta(t)$ the continuous impulse function. **[3]**

Answer

$X(s) = \int_{-\infty}^{\infty} \delta(t-a)e^{-st}dt = e^{-sa}$, ROC: Entire plane

Most students answered this question correctly.

(iv) Find the analytical expression and the Region of Convergence (ROC) of Laplace transform of the signal $u(t)$, with $u(t)$ the continuous unit step function. **[2]**

Answer

$X(s) = \int_{-\infty}^{\infty} u(t)e^{-st}dt = \int_{0}^{\infty} e^{-st}dt = \frac{1}{s}$, ROC: Re$\{s\} > 0$

Most students answered this question correctly.

(b) Consider a continuous-time causal signal $x(t)$ with Laplace transform $X(s) = \frac{2s+5}{s^2+5s+6}$. Find the analytical expression of $x(t)$ and furthermore, find the region of convergence of $X(s)$. **[5]**

Answer

$$X(s) = \frac{1}{s+2} + \frac{1}{s+3} \Rightarrow$$

$x(t) = e^{-2t}u(t) + e^{-3t}u(t)$

ROC: Re$\{s\} > -2$

© Imperial College London

In general, many students answered this question correctly, but there were mistakes in the final ROC.

(c) Consider a continuous, Linear Time-Invariant system with input the signal $x(t) = u(t)$, the unit step function and output the signal $y(t) = -\frac{2}{3}e^{t}u(-t) + \frac{1}{3}e^{-2t}u(t)$. Determine the transfer function of the system $H(s)$ and its Region of Convergence (ROC). **[5]**

Answer

$y(t) = -\frac{2}{3}e^{t}u(-t) + \frac{1}{3}e^{-2t}u(t)$

$Y(s) = \frac{2}{3}\frac{1}{s-1} + \frac{1}{3}\frac{1}{s+2} = \frac{1}{3}\frac{3s+3}{(s-1)(s+2)} = \frac{s+1}{(s-1)(s+2)}$

ROC: $\text{Re}\{s\} < 1 \cap \text{Re}\{s\} > -2 \Rightarrow -2 < \text{Re}\{s\} < 1$

$X(s) = \frac{1}{s}$, $\text{Re}\{s\} > 0$

$H(s) = \frac{Y(s)}{X(s)} = \frac{s(s+1)}{(s-1)(s+2)}$, $0 < \text{Re}\{s\} < 1$

In general, many students answered this question correctly, but there were mistakes in the final ROC.

(d) The output $y(t)$ of an LTI system is related to the input $x(t)$ by the differential equation

$$\frac{d^2y(t)}{dt^2} + 11\frac{dy(t)}{dt} + 24y(t) = 5\frac{dx(t)}{dt} + 5x(t)$$

Let $X(s)$ and $Y(s)$ denote the Laplace transforms of $x(t)$ and $y(t)$, respectively, and let $H(s)$ denote the Laplace transform of the system's impulse response $h(t)$.

(i) Determine the transfer function $H(s)$ of the system. **[3]**

Answer

$(s^2 + 11s + 24)Y(s) = 5sX(s) + 5X(s) \Rightarrow (s+3)(s+8)Y(s) = (5s+5)X(s) \Longrightarrow$

$$\frac{Y(s)}{X(s)} = \frac{-2}{s+3} + \frac{7}{s+8} = H(s)$$

Many students answered this question correctly.

(ii) Determine all possible forms of the impulse response $h(t)$. **[3]**

Answer

$h(t) = -2e^{-3t}u(t) + 7e^{-8t}u(t)$, ROC: $\text{Re}\{s\} > -3$, stable and causal

$h(t) = -2e^{-3t}u(t) - 7e^{-8t}u(-t)$, ROC: $\text{Re}\{s\} > -3$, $\text{Re}\{s\} < -8$, not possible

$h(t) = 2e^{-3t}u(-t) + 7e^{-8t}u(t)$, ROC: $\text{Re}\{s\} > -8$, $\text{Re}\{s\} < -3$, neither stable nor causal

$h(t) = 2e^{-3t}u(-t) - 7e^{-8t}u(-t)$, ROC: $\text{Re}\{s\} < -8$, neither stable nor causal

Many flaws were present, the most prominent one was that the impulse responses but not ROCS were given.

(iii) Can the above system be both stable and causal? **[2]**

Answer

YES, first case above

Most students provided a correct answer.

© Imperial College London

3. This question carries 30% of the mark.

(a) Show that the Fourier transform of the function $x(t) = \frac{W}{\pi}\text{sinc}(Wt)$, where W is a constant parameter is $X(\omega) = \text{rect}(\frac{\omega}{2W})$ with

$$\text{rect}(t) = \begin{cases} 1 & |t| < 0.5 \\ 0.5 & |t| = 0.5 \\ 0 & \text{otherwise} \end{cases}$$

[3]

Answer

$$x(t) = \frac{1}{2\pi}\int_{-\infty}^{\infty} X(\omega)e^{j\omega t}d\omega = \frac{1}{2\pi}\int_{-W}^{W} e^{j\omega t}d\omega = \frac{1}{2\pi}\left(\frac{e^{jWt}}{jt} - \frac{e^{-jWt}}{jt}\right) = \frac{2j\sin(Wt)}{2\pi jt}$$
$$= W\frac{\sin(Wt)}{\pi Wt} = \frac{W}{\pi}\text{sinc}(Wt)$$

Most students provided a correct answer but without a proof.

(b) Determine the Nyquist sampling rate and the Nyquist sampling interval for the following signals.

(i) $x_1(t) = \text{sinc}^2(100\pi t)$. **[3]**

Answer

From the Fourier transform of $\text{sinc}(100\pi t)$ we see that the bandwidth of it is 50 Hz. Therefore, the bandwidth of $\text{sinc}^2(100\pi t)$ is 100Hz. The Nyquist rate is 200Hz. The Nyquist interval is $\frac{1}{200}\text{sec} = 0.005\text{sec}$.

(ii) $x_2(t) = 0.01\text{sinc}^2(100\pi t)$. **[3]**

Answer

Same as in (i).

(iii) $x_3(t) = \text{sinc}(100\pi t) + 3\text{sinc}^2(60\pi t)$. **[3]**

Answer

The bandwidth of $\text{sinc}(100\pi t)$ is 50Hz and the bandwidth of $\text{sinc}^2(60\pi t)$ is $30 \times 2 = 60$Hz and therefore, the total bandwidth is 60Hz. The Nyquist rate is 120Hz. The Nyquist interval is $\frac{1}{120}\text{sec} = 0.00833\text{sec}$.

(iv) $x_4(t) = \text{sinc}(50\pi t)\text{sinc}(100\pi t)$. **[3]**

Answer

The bandwidth of $\text{sinc}(50\pi t)$ is 25Hz and the bandwidth of $\text{sinc}(100\pi t)$ is 50Hz and therefore, the total bandwidth is 75Hz. The Nyquist rate is 150Hz. The Nyquist interval is $\frac{1}{150}\text{sec} = 0.00667\text{sec}$.

In general, many students answered these questions correctly. However, a non-negligible number of students presented the answers without any explanation at all.

(c) (i) Consider a discrete signal $x[n]$ with $z-$transform $X(z)$. Find the $z-$transforms of the signals $x_1[n] = x[n-2]$ and $x_2[n] = x[-n-3]$ as functions of the $z-$transform $X(z)$. **[3]**

Answer

Assume that $x_1[n] = x[n-2]$.

© Imperial College London

$$X_1(z) = \sum_{n=-\infty}^{\infty} x_1[n]z^{-n} = \sum_{n=-\infty}^{\infty} x[n-2]z^{-n} = \sum_{n=-\infty}^{\infty} x[n-2]z^{-(n-2)}\,z^{-2}$$
$$= z^{-2}X(z)$$
Assume that $x_2[n] = x[-n-3]$.
$$X_2(z) = \sum_{n=-\infty}^{\infty} x_2[n]z^{-n} = \sum_{n=-\infty}^{\infty} x[-n-3]z^{-n} = \sum_{n=-\infty}^{\infty} x[-n-3]\left(\frac{1}{z}\right)^{n}\left(\frac{1}{z}\right)^{-3}\left(\frac{1}{z}\right)^{3}$$
$$= \left(\frac{1}{z}\right)^{-3}\sum_{n=-\infty}^{\infty} x[-n-3]\left(\frac{1}{z}\right)^{-(-n-3)} = \left(\frac{1}{z}\right)^{-3}\sum_{k=\infty}^{-\infty} x[k]\left(\frac{1}{z}\right)^{-k} = \left(\frac{1}{z}\right)^{-3}X\left(\frac{1}{z}\right)$$

Many students answered this question correctly.

(ii) Consider a signal $y[n]$ which is related to two signals $x_1[n]$ and $x_2[n]$ by
$$y[n] = x_1[n] * x_2[n]$$
where
$$x_1[n] = \left(\frac{1}{2}\right)^{n} u[n] \text{ and } x_2[n] = \left(\frac{1}{3}\right)^{n} u[n]$$
with $u[n]$ the discrete unit step function. Determine the $z-$transform $Y(z)$ of $y[n]$.with $u[n]$ the discrete unit step function. Use the results obtained in question (b)(i) above to determine the $z-$transform of $y[n]$. **[3]**

Answer
$$Y(z) = Z\{x_1[n]\}\cdot Z\{x_2[n]\} = z^2\frac{1}{\left(z-\frac{1}{2}\right)}\cdot\frac{1}{\left(z-\frac{1}{3}\right)}$$

Many students answered this question correctly.

(d) Consider an odd sequence $x[n]$ (i.e., $x[n] = -x[-n]$) with rational $z-$transform $X(z)$.

(i) Find $X\left(\frac{1}{z}\right)$ as a function of $X(z)$. **[3]**

Answer
$g[n] = -x[-n]$
$G(z) = \sum_{n=-\infty}^{\infty} g[n]z^{-n} = \sum_{n=-\infty}^{\infty} -x[-n]z^{-n} =$
$\sum_{n=-\infty}^{\infty} -x[n]\,z^{n} = \sum_{n=-\infty}^{\infty} -x[n]\left(\frac{1}{z}\right)^{-n}$
$= -X\left(\frac{1}{z}\right)$
Therefore, it is obvious that if $x[n] = -x[-n]$ then $X(z) = -X\left(\frac{1}{z}\right)$.

Many students answered this question correctly.

(ii) From your result in part (d)(i), show that if a pole (zero) of $X(z)$ occurs at $z = z_0$, then a pole (zero) must also occur at $z = 1/z_0$. **[3]**

Answer
Assume that $x[n] = -x[-n]$ which implies $X(z) = -X\left(\frac{1}{z}\right)$.
Assume that
$X(z) = P(z)(z - z_0)$
$$-X\left(\frac{1}{z}\right) = -P\left(\frac{1}{z}\right)\left(\frac{1}{z} - z_0\right) = -P\left(\frac{1}{z}\right)(1 - zz_0)\frac{1}{z}$$
For $z = \frac{1}{z_0}$, $X\left(\frac{1}{z}\right) = 0 \Rightarrow \frac{1}{z_0}$ is a zero for $X\left(\frac{1}{z}\right)$.

© Imperial College London

Same analysis is valid for poles.

Many students answered this question correctly.

(iii) Verify the results in part (d)(i) the sequence $\delta[n+2]-\delta[n-2]$ **[3]**

Answer

$Z\{\delta[n+2]\} = z^2$

$Z\{\delta[n-2]\} = z^{-2}$

$X(z) = Z\{\delta[n+2]\} - Z\{\delta[n-2]\} = z^2 - z^{-2}$

$X\left(\frac{1}{z}\right) = -X(z)$

$$X(z) = \frac{z^4-1}{z^2} = \frac{(z^2-1)(z^2+1)}{z^2} = \frac{(z-1)(z+1)(z-i)(z+i)}{z^2}$$

Poles:

We see that we have poles at 0.

We know that $\frac{1}{0} = \infty$. We also see that $X(\infty) = \infty$. Therefore, ∞ is also a pole.

Zeros:

We see that we have zeros at 1 and -1. (1 is the same as $1/1$ and also -1 is the same as $-1/1$).

Another zero is i. We see that $\frac{1}{i} = -i$ which is also a zero. The same is valid for $-i$.

Minimal number of students answered this question correctly.

© Imperial College London