

Hydraulic Flat Tappet Lifters



Crower Hydraulic lifters will compliment any hydraulic flat tappet Camshaft. Our lifters are available in your choice of Premium USA made Hylift/Johnson or our Eaton brand to suit your budget. Our lifters are available with standard or specialty oiling options, specialty features like upgraded snap ring for improved valve train functionality. New lifters must always be used when installing a new flat tappet camshaft. Weights & seat heights shown are for comparison only and may vary.

PREMIUM U.S. MADE HYDRAULIC FLAT TAPPET LIFTERS

Description	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Oiling Option	Part No.
AMC V8	0.903	1.600"	108.3g		66031J-16
AMC V8	0.903	1.600"	107.8g	Cam Saver	66031JX3-16
AMC 199 232 258 6 Cyl	0.903	1.600"	108.3g		66031J-12
AMC 199 232 258 6 Cyl	0.903	1.600"	107.8g	Cam Saver	66031JX3-12
Buick 215 300 340 350 V8	0.842	1.755"	95.2g		66050J-16
Buick 215 300 340 350 V8	0.842	1.755"	95g	Cam Saver	66050JX3-16
Chevrolet 8 Cyl Rev Max	0.842	1.690"	94.8g		66000RM-16
Chevrolet 8 Cyl Rev Max	0.842	1.690"	94.2g	Cam Saver	66000RM3-16
Chevrolet 6 Cyl	0.842	1.700"	96g		66000J-12
Chevrolet 6 Cyl	0.842	1.700"	95.5g	Cam Saver	66000JX3-12
Chevrolet 8 Cyl	0.842	1.700"	96g		66000J-16
Chevrolet 8 Cyl	0.842	1.700"	95.5g	Cam Saver	66000JX3-16
Ford 144 250 6 Cyl	0.874	1.580"	92.1g		66016J-12
Ford 221 302 351 370 400 429 460	0.874	1.715"	105g		66015J-16
Ford 221 302 351 370 400 429 460	0.874	1.715"	103.9g	Cam Saver	66015JX3-16
Ford 221 302 351 370 400 429 460 Rev Max	0.874	1.705"	103.9g		66015RM-16
Ford 221 302 351 370 400 429 460 Rev Max	0.874	1.705"	103.5g	Cam Saver	66015RM3-16
Ford 221 302 351 370 400 429 460 Slow Leak down & Heavy Duty Snap Ring	0.874	1.660"	103.8g		66015JR-16
Ford 221 302 351 370 400 429 460 Slow Leak down & Heavy Duty Snap Ring	0.874	1.660"	103.7g	Cam Saver	66015JRX3-16
Ford 240 300 6 CYL	0.874	1.715"	105g		66015J-12
Ford 240 300 6 CYL	0.874	1.715"	103.9g	Cam Saver	66015JX3-12
Ford 240 300 6 Cyl Slow Leak down & Heavy Duty Snap Ring	0.874	1.660"	103.7g	Cam Saver	66015JRX3-12
Ford 332-428 V8	0.874	1.590"	92.7g		66016J-16
Ford 332-428 V8	0.874	1.580"	92.5g	Cam Saver	66016JX3-16
Mopar LA ,Mopar B, Hemi	0.903	1.585"	108.2g		66031J-16
Mopar LA ,Mopar B, Hemi	0.903	1.585	108g	Cam Saver	66031JX3-16
Oldsmobile 330 455	0.842	1.750"	95.5g		66056J-16
Oldsmobile 330 455	0.842	1.750"	95g	Cam Saver	66056JX3-16
Pontiac V8	0.842	1.750"	95.5g		66056J-16
Pontiac V8	0.842	1.750"	95g	Cam Saver	66056JX3-16

Guy Aguayo

Big Block Chevy 598 cubic inch

CROWER Cranks, Rods, 55mm Cam, Shaft Rockers, Lifters, .904 and all valve train parts. That is every part from Crower




Hydraulic Flat Tappet Lifters

HYDRAULIC FLAT TAPPET LIFTERS

Description	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Oiling Option	Part No.
AMC 199 232 258 6 Cyl	0.903	1.570"	109g		66031-12
AMC 199 232 258 6 Cyl	0.903	1.570"	108g	Cam Saver	66031X3-12
AMC V8	0.903	1.570"	108g	Cam Saver	66031X3-16
Buick 215 300 340 350 V8	0.842	1.750"	99.5g		66050-16
Buick 215 300 340 350 V8	0.842	1.750"	98.3g	Cam Saver	66050X3-16
Buick 215 300 340 350 V8 Heavy Duty Snap Ring	0.842	1.750"	98.3g	Cam Saver	66050RX3-16
Buick V6	0.842	1.750"	99.5g		66050-12
Buick V6	0.842	1.750"	98.3g	Cam Saver	66050X3-12
Chevrolet 8 CYL	0.842	1.700"	99.8g		66000-16
Chevrolet 6 Cyl	0.842	1.7-0"	99.8g		66000-12
Chevrolet 6 Cyl	0.842	1.700"	99.5g	Cam Saver	66000X3-12
Chevrolet V8	0.842	1.700"	99.5g	Cam Saver	66000X3-16
Chevrolet V8 Cheaters	0.842	1.700"	99.9g		66000X5-16
Chevrolet V8 with Heavy Duty Snap Ring	0.842	1.700"	99.7g		66000R-16
Chevrolet V8 with Heavy Duty Snap Ring	0.842	1.700"	99.2g	Cam Saver	66000RX3-16
Ford 144 250 6 CYL	0.874	1.580"	97.9g		66016-12
Ford 144 250 6 Cyl	0.874	1.580"	97.8g	Cam Saver	66016X3-12
Ford 221 302 351 370 400 429 460	0.874	1.720"	109.2g		66015-16
Ford 221 302 351 370 400 429 460	0.874	1.720"	108.8g	Cam Saver	66015X3-16
Ford 240 300 6 CYL	0.874	1.720"	109.2g		66015-12
Ford 240 300 6 Cyl	0.874	1.720"	108.8g	Cam Saver	66015X3-12
Ford 332-428 V8	0.874	1.580"	97.9g		66016-16
Ford 332-428 V8	0.874	1.580"	97.8g	Cam Saver	66016X3-16
Mopar LA ,Mopar B, Hemi	0.903	1.575"	108.5g		66031-16
Mopar LA, Mopar B, Hemi	0.903	1.575"	108.1g	Cam Saver	66031X3-16
Oldsmobile 330 455	0.842	1.755"	101.8g		66056-16
Oldsmobile 330 455	0.842	1.755"	101.1g	Cam Saver	66056X3-16
Pontiac V8	0.842	1.755"	101.1g	Cam Saver	66056X3-16
Pontiac V8	0.842	1.755"	101.8g		66056-16
Pontiac V8	0.842	1.750"	95g	Cam Saver	66056JX3-16

*Eaton Brand - Made in North America

Matt Field, Formula Drift
Crower Lifters & Rockers

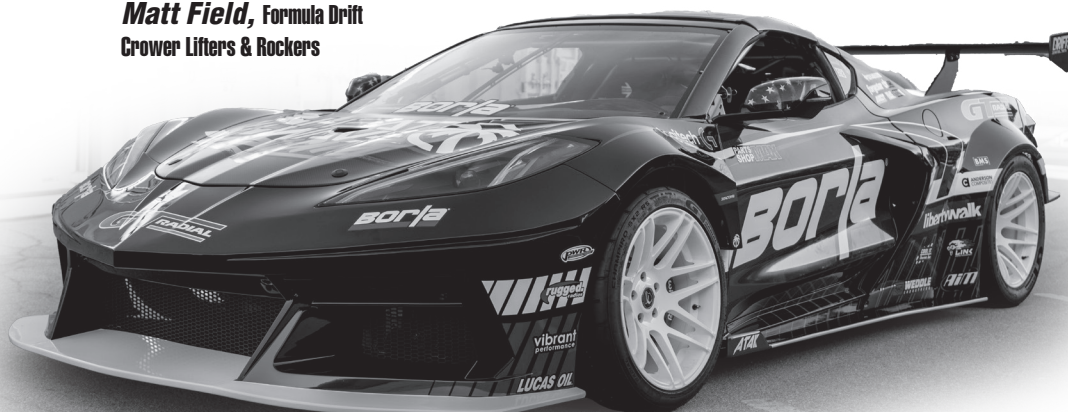


Mechanical Flat Tappet Lifters



Crower Mechanical lifters will compliment any solid flat tappet Camshaft. Our lifters are available in your choice of Premium USA made Hylift/Johnson or our Eaton brand to suit your budget. Our lifters are available with standard or specialty oiling options, specialty features and lightweight versions for improved valve train functionality. New lifters must always be used when installing a new flat tappet camshaft. Weights & seat heights shown are for comparison only and may vary.

PREMIUM U.S. MADE MECHANICAL FLAT TAPPET

Description	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Oiling Option	Part No.
AMC 199-232-258 6-cyl.	0.903	1.485"	101.1g		66945-12
AMC 199-232-258 6-cyl.	0.903	1.485"	101.1g	Cool Face	66945X980-12
AMC 290-401 8-cyl.	0.903	1.485"	101.1g		66945-16
AMC 290-401 8-cyl.	0.903	1.485"	101.1g	Cool Face	66945X980-16
Buick 6 Cyl	0.842	1.570"	85.3g	Cool Face	66900JX980-12
Buick 6 Cyl	0.842	1.570"	85.8g		66900J-12
Buick 8 Cyl	0.842	1.570"	85.3g	Cool Face	66900JX980-16
Buick V8	0.842	1.570"	85.8g		66900J-16
Chevrolet 194-292 & Corvair	0.842	1.570"	85.8g		66900J-12
Chevrolet 6 Cyl	0.842	1.570"	85.3g	Cool Face	66900JX980-12
Chevrolet II 4-cyl	0.842	1.570"	85.8g		66900J-8
Chevrolet V8	0.842	1.570"	85.8g		66900J-16
Chevrolet V8	0.842	1.570"	85.3g	Cool Face	66900JX980-16
Chevrolet V8 Premium Lightweight with Cool Face Oiling (72 grams)	0.842	1.570"	72.2g	Cool Face	66900LW980-16
Chevrolet V8 Premium Lightweight (72 grams)	0.842	1.570"	72.2g		66900LW-16
Chevrolet V8 with Edge Orifice Oiling	0.842	1.570"	76.8g		66909-16
Chevrolet V8 with Edge Orifice Oiling & Cool Face	0.842	1.570"	76.7g	Cool Face	66909X980-16
Ford 221-351 & 429-460	0.874	1.640"	97g		66915J-16
Ford 221-351 & 429-460	0.874	1.640"	97g	Cool Face	66915JX980-16
Ford 221-351 & 429-460 Lightweight (75 grams each)	0.874	1.640"	77g		66915LW-16
Ford 221-351 & 429-460 Lightweight (75 grams each)	0.874	1.640"	77g	Cool Face	66915LW980-16
Ford 240-300 6 Cyl	0.874	1.640"	97g		66915J-12
Ford 332-428 Deep seat	0.874	0.155"	61.2g		66925-16
Ford 332-428 Deep seat with Cam Saver oiling	0.874	0.155"	60.7g	Cam Saver	66925X3-16
Ford Flat Head					66913-16
Ford Flat Head without Adjusters					66913NA-16
Mopar 273-360 Lightweight (78 grams each)	0.903	1.490"	81g		66931LW-16
Mopar LA, Mopar B & Hemi V8 Lightweight (78 grams each)	0.903	1.490"	80.5g	Cool Face	66931LW980-16
Pontiac Oldsmobile V8 (55Up) with high oil band	0.842	1.490"	88.5g	Cool Face	66963X980-16
Pontiac Oldsmobile V8 (55Up) with high oil band	0.842	1.490"	88.5g		66963-16

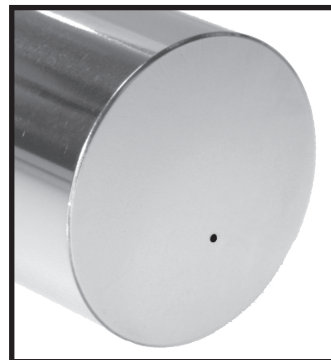

Coolface


The CROWER Coolface option sends oil to the lifter face for reduced lobe wear

Mechanical Flat Tappet Lifters

MECHANICAL FLAT TAPPET

Description	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	RC Hardness	Part No.
Buick 6 Cyl	0.842	1.570"	96.7g		66900-12
Buick V6	0.842	1.570"	96.2g	Cool Face	66900X980-12
Buick V8	0.842	1.570"	96.7g		66900-16
Buick V8	0.842	1.570"	96.2g	Cool Face	66900X980-16
Chevrolet 194-292 & Corvair	0.842	1.570"	96.2g	Cool Face	66900X980-12
Chevrolet 194-292 & Corvair	0.842	1.570"	96.7g		66900-12
Chevrolet II 4-cyl	0.842	1.570"	96.7g		66900-8
Chevrolet V8	0.842	1.570"	96.7g		66900-16
Chevrolet V8	0.842	1.570"	96.2g	Cool Face	66900X980-16
Ford 221-351 & 429-460	0.874	1.640"	108g		66915-16
Ford 221-351&429-460	0.874	1.640"	108g	Cool Face	66915X980-16
Ford 240-300 6 Cyl	0.874	1.640"	108g		66915-12
Ford 332-428	0.874	1.500"	103g		66916-16
Ford 332-428	0.874	1.500"	102.8g	Cam Saver	66916X3-16


*Eaton Brand - Made in North America

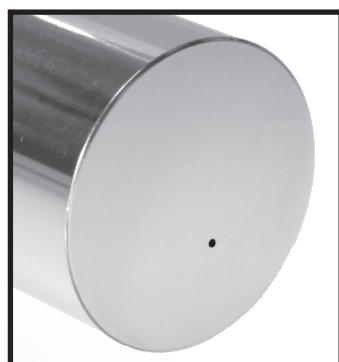

Coolface

The CROWER Coolface option sends oil to the lifter face for reduced lobe wear

**DON'T SEE YOUR
FAVORITE PART # ?
IT MAY STILL BE AVAILABLE
CALL THE CROWER
TECH. DEPT FOR INFO.**

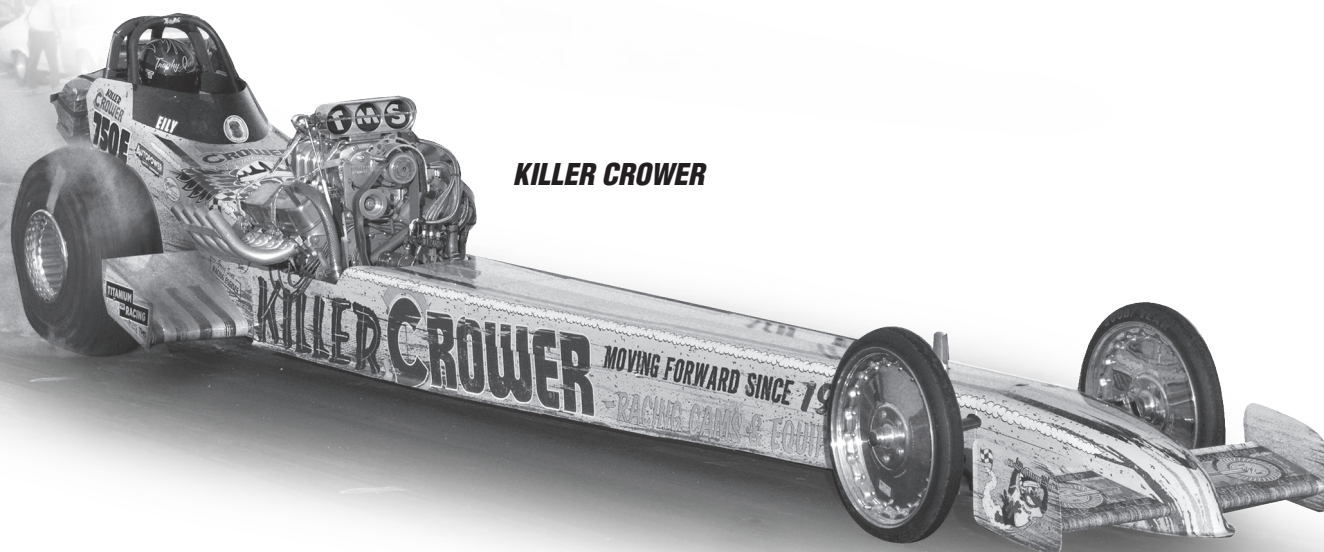

KILLER CROWER

Hydraulic Roller Lifters

Photo Shown
Part # 66330
Stock Late Model



Photo Shown
Part # 66310LM
Retro Fit
Lock Blade



Crower hydraulic roller lifters combine the performance level characteristics of a roller with the reliability of a hydraulic. Crower hydraulic lifters are precision flow checked for optimum leak down rates Completely redesigned body and bearing. Retro-fit hydraulic rollers are for early style blocks.

LATE MODEL (Drop-in style - No Blade)		Spring Pressure Group	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Bearing O.D.	HIPPO	Part No.
CHEVROLET 262-400 V8 - Late Model		1		-			-	66330-16
CHEVROLET 396-454 V8 - Late Model		1		-			-	66331-16
CHEVROLET 396-454 V8 - Late Model (Truck/Tall Deck)		1		-			-	66331-16
DODGE Magnum V8 (set/16) - Late Model		1		-			-	66325-16
DODGE Magnum V10 and Viper V10 (set/20) - Late Model		1		-			-	66325-20
DODGE Hemi-HI Perf Short Travel		1		-			-	66337ST-16
DODGE Hemi-Stock Replacement		1		-			-	66323PH-16
GM LS		1		-			-	66328-16
FORD 302 V8 For Late Model 289-302		1		-			-	66335-16
RETRO-FIT (Retro-Fit Rollers are linked pairs)		Spring Pressure Group	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Bearing O.D.	HIPPO	Part No.
AMC Hydraulic Roller Lifters retro-fit		1		-			-	66345-16
CHEVROLET SBC 265-400 .300" - Taller retro-fit		1		-			YES	66310LM-16*1
CHEVROLET SBC 265-400 .300 Taller retro-fit with pin oiling		1		-			YES	66310H-16
CHEVROLET 396-454 V8 .300 - Taller retro-fit		1		-			-	66321LM-16*1
CHEVROLET 396-454 V8 .300 - Taller retro-fit (Truck/Tall Deck)		1		-			YES	66321LM-16*1
CHEVROLET 396-454 V8 .300 Taller retro-fit with pin oiling		1		-			YES	66321H-16
GM LS1		1		-			-	66322-16
GM LS Short Travel		1		-			-	66351-16
FORD Small Block 289-302-351W - Retro-fit lifter		1		-			-	66337-16
FORD Big Block 429, 460, Ford FE - Retro-fit lifter		1		-			-	66338-16
MOPAR Small Block 273-360 - Retro-fit lifter		1		-			-	66339-16
MOPAR Big Block 383-440 - Retro-fit lifter		1		-			-	66341-16
OLDSMOBILE retro-fit hydraulic roller lifters		1		-			-	66333-16
PONTIAC retro-fit hydraulic roller lifters		1		-			-	66333-16

*Requires a shorter pushrod length.

Will fit Early & Late model blocks.

Spring Groups: #1 300-450 lbs. (See Page 124 for details.)

Royce Payton
Everything Crower



Solid Roller Lifters

APPLICATION GUIDELINES

Hydraulic Roller Lifter: For Hydraulic Roller camshaft applications. Suitable for Hydraulic roller cam designs only.

Spring Pressure Group #1

Original Crowder Roller-Full Body Style: These are the original Crowder roller and were designed for early GM Blocks. These are our most economical roller lifter due to simplified full body design. These will accommodate our high rev kit and incorporate many of the same high quality components as our severe duty roller lifters. These original series lifters are available only with a centered seat and are not suitable for some aftermarket cylinder heads or oversized pushrod diameters. Suitable for mild to semi aggressive cam design.

Spring Pressure Group #2

Hi-Seat Offset Rollers-Integral Rev-kit Button Style: High-Seat rollers feature a .180" offset pushrod seat and integral rev kit button which allows for shorter push rods, reducing flex and weight for improved valve control. Suitable for aggressive cam design

Spring Pressure Group #3

Severe Duty Roller-Cutaway Style: Designed for higher spring pressures, greater pushrod clearance and available in offsets to suit most aftermarket cylinder heads. Available in .842, .874, .903, .937 diameters. The oversized (.903" & .937") diameters help distribute the load of increased spring pressures by incorporation a larger diameter bearings. Suitable for aggressive cam designs

Spring pressure groups: # 3,5,8

EnduraMax Roller-Bushed Bearing Style: Designed for higher spring pressures when larger diameter rollers are not an option or in the larger diameter lifters where spring pressures are extreme. The spring pressures exerted on the roller are disbursed over the full surface area of the bushed bearing. Engine blocks must have oil available to the lifter. Available in .842, .874, .903, .937 diameters. Suitable for Aggressive Cam Designs

Spring Pressure Groups: # 4,6,9

Maximus Roller-Large Diameter Needles, Tool Steel Pin & Outer race: Typical Applications for this roller lifter are Top Fuel, Blown Alcohol. The Maximus roller lifter incorporates large diameter needles, matched tool steel axle and outer bearings to create the optimum rolling element. Available in .903 and .998 OD. Suitable for Aggressive Cam design.

Note: 1 1/16 OD for Top Fuel - Coming Soon.

Spring Pressure Groups: #7 & 10

Note of caution: Spring pressure is not the only factor that needs to be addressed when determining what roller spring group you should use for your engine. Engines with NOS, Turbo or Blowers create very high cylinder pressures that the exhaust valves must open against. In these instances we recommend going with the highest spring pressure group that your lifter bore will accommodate. The spring pressures provided here are general guidelines only, due to the vast amount of variables that may be present in your unique build. Please call our technical line for expert advice if you have any doubts.

Group# Open Spring Pressure

- | | |
|----|-------------|
| 1 | - 300-450 |
| 2 | - 680-780 |
| 3 | - 750-900 |
| 4 | - 900-1000 |
| 5 | - 1000-1300 |
| 6 | - 1050-1350 |
| 7 | - 1150-1350 |
| 8 | - 1200-1400 |
| 9 | - 1250-1450 |
| 10 | - 1400+ |

Precision oil metering holes deliver plenty of oil flow to the overhead, vital for longer pushrod and valve spring life.

HIPPO oiling features oil metering hole that delivers plenty of lubrication to the needle bearings and pin.

Redesigned bearing slot provides more shrouding around critical bearing area reducing tappet and lifter bore wear.

Utilizes longer, "control contoured" tapered needle bearings that deliver unsurpassed load capacity and correct for irregular tappet alignment.

Captive blades are secured with Crowder's exclusive orbit formed locking mechanism for permanent spool attachment.

Crowder's "beefy" blades are made from premium stainless steel alloy to ensure the absolute strongest fastening system available.



Crowder rollers are available in all popular designs (full body and cutaway) as well offsets, body diameters.

Integral one piece body reduces weight without compromising strength and delivers the utmost in rigidity and axle trueness.

CNC machined, heat-treated body for best possible wear resistance.

Unique orbit formed pin eliminates snap rings that could come loose.

Crowder roller lifter tappets feature crowned bearings and crowned outer race that greatly reduces lobe tracking.

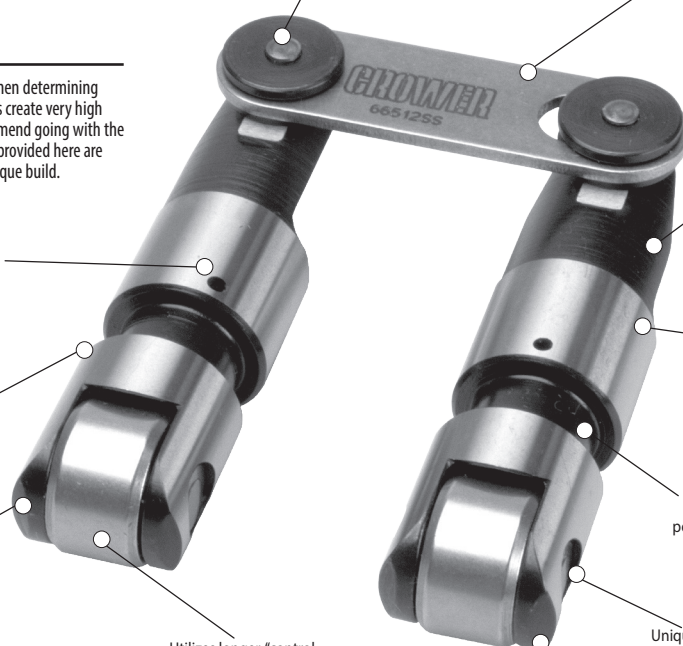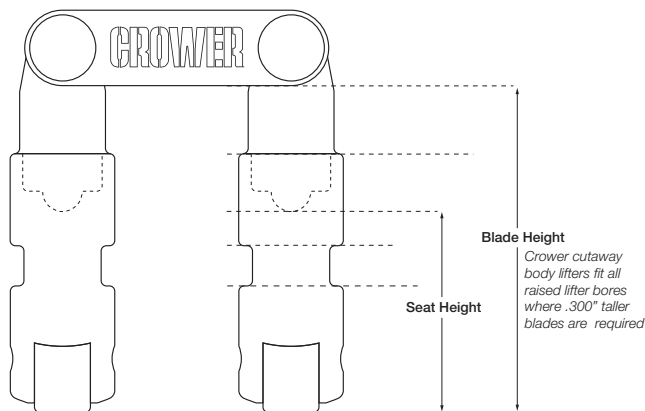

Solid Roller Lifters



CROWER'S ORIGINAL FULL BODY ROLLER LIFTERS

The best roller tappets on the market. Delivers 200% more life expectancy than competing brands. Features crowned bearings and crowned outer race that greatly reduces lobe tracking.

No offsets. Oil restrictors are not recommended when running Crowder roller lifters.

Description	Spring Pressure Group	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Tall Lifter Bore Block*	Bearing O.D.	Part No.	HIPPO Part No.
CHEVY II 4 cylinder	2	.8415"	1.740"	126g	NO	.750"	66206-8	66206H-8
CHEVROLET '62-up 194-250 6 cylinder	2	.8415"	1.740"	126g	NO	.750"	66207-12	66207H-12
CHEVROLET V8 '55-up 262-400 cu. in.	2	.8415"	1.590"	119g	NO	.750"	66200-16	66200H-16
CHEVROLET V8 Small Block .300 taller body	2	.8415"	1.590"	125g	YES	.750"	66200T-16*	66200TH-16*
CHEVROLET V8 '55-up 262-400 cu. in.	2	.8731"	1.590"	130g	NO	.750"	66200X874-16	66200X874H-16
CHEVROLET V8 '64-up Big Block	2	.8415"	1.590"	119g	NO	.750"	66201-16	66201H-16
CHEVROLET V8 Big Block .300 taller body	2	.8415"	1.590"	125g	YES	.750"	66201T-16*	66201TH-16*
CHEVROLET V8 '64-up Big Block	2	.8731"	1.590"	130g	NO	.750"	66201X874-16	66201X874H-16
CHEVROLET V8 '58-'65 348-409 cu. in.	2	.8415"	1.590"	119g	NO	.750"	66204-16	66204H-16
OLDSMOBILE V8 '64-'84 260-455 cu. in.	2	.8415"	1.740"	127g	NO	.750"	66260-16	66260H-16
PONTIAC V8 '55-up 326-455 cu. in.	2	.8415"	1.740"	127g	NO	.750"	66260-16	66260H-16

*(Fits blocks with taller lifter bores)

For High Pressure Pin Oiling (HIPPO), specify "H" after p/n.
Ex: 66200H-16

Also available in pairs by replacing -16 with -2.


Crowder roller lifters are rebuildable.

Spring Groups: #2 680-750 lbs. (See Page 124 for details.)

**RACING 905 TROPHY TRUCK
OWNER/DRIVER AARON CELICEO**




High Pressure Pin Oiling (HIPPO)

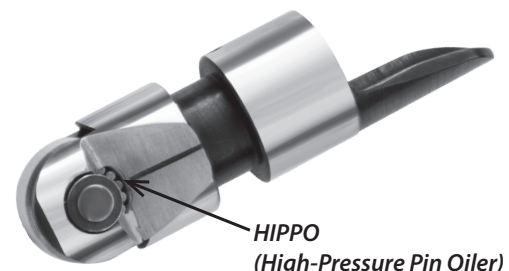


EDM Technology allows Crowder engineers to place a precision hole directly from the oil band to the needle bearings. Delivers more oil to critical, high load areas for greatly improved cycle life. Specify "H" after lifter part number to order (ex. 66290H-16).

Solid Roller Lifters

BB CHEVY

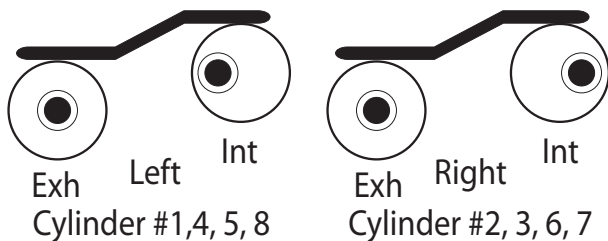


SB CHEVY

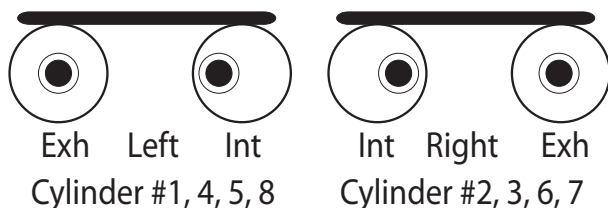


SB/BB FORD

SBC w/SB2 Head



When ordering only pairs of roller lifters:
SB Chevy 1, 4, 5, 8 cylinders, specify "L" for left offset
ex. #66292X937L-2 and be sure to specify cylinder number.
SB Chevy 2, 3, 6, 7 cylinders, specify "R" for right offset
ex. #66292X937R-2 and be sure to specify cylinder number.

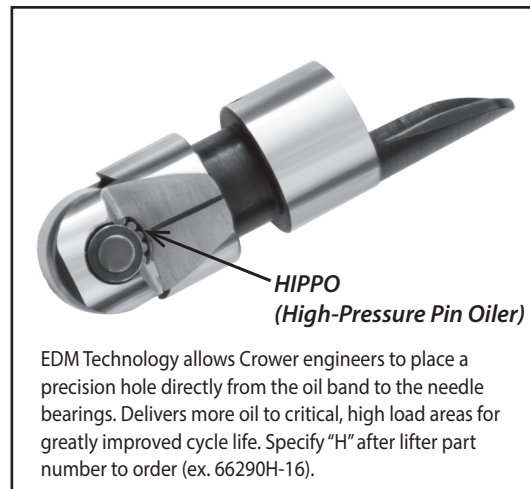


Roller Lifter Sizes & Bore Sizes

Roller Lifter Size	Aluminum Block Lifter Bore	Cast Iron Block Lifter Bore
+/- .0002 tolerance	.001/.0015 clearance	.002/.0025 clearance
.8415"	.8425"/.8430"	.8435"/.8440"
.8731"	.8741"/.8746"	.8751"/.8756"
.9031"	.9041"/.9046"	.9051"/.9056"
.9361"	.9371"/.9376"	.9381"/.9386"
.9890"	.9900"/.9905"	.9910"/.9915"
.9975"	.9985"/.9990"	.9995"/1.000"

Note: OIL RESTRICTORS ARE NOT RECOMMENDED

CUSTOM CONFIGURATION ROLLERS

Crower can build your lifters to your exact configuration. Don't see what you need from our wide selection of lifters? Give us a call and speak to one of our techs and let us build you a custom set of lifters to your specs.

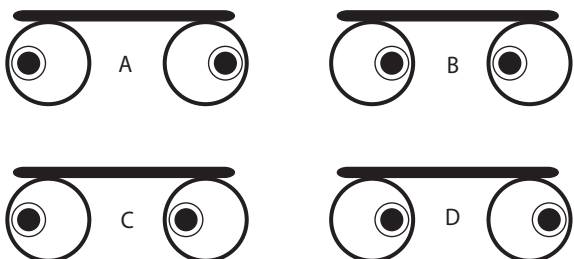

Solid Roller Lifters



SEVERE-DUTY CUTAWAY ROLLER LIFTERS

A must for high cylinder pressure, high rpm applications. Crowder's Severe-Duty Cut-Away style rollers feature a superior, billet alloy body, lightweight design and a heavy-duty blade, raised to fit late model blocks. Severe-Duty Cutaway Roller Lifters are lighter than the original lifters and available with offset pushrod seats. Standard or .150" offset. Fit .842 & .875 Lifter Bore Blocks.

Lifters are available with Hi Pressure Pin Oiling (HIPPO) option.

Oil restrictors are not recommended when running Crowder roller lifters.

Description	Spring Pressure Group	Intake Offset	Exhaust Offset	Pushrod Left	Seat Center	Location Right	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Tall Lifter Bore Block*	Bearing O.D.	Part No.	Part No. w/HIPPO
AMC V8 '66-'91, 290-304-343-360(5.9L)-390-401 cu. in.	3	-	-	-	16	-	.9031"	1.340"	116g	-	.750"	66384-16	66384H-16
BUICK V6 '78-'86, 196(3.2L)-231(3.8L)-252(4.1L) cu. in.	2	-	-	-	16	-	.8415"	1.590"	126g	-	.700"	66266-12	66266H-12
BUICK V8 '61-'80, 215-300-340-350 cu. in.	2	-	-	-	16	-	.8415"	1.590"	126g	-	.700"	66266-16	66266H-16
BUICK V8 '67-'76, 400-430-455 cu. in.	2	-	-	-	16	-	.8415"	1.590"	126g	-	.700"	66267-16	66267H-16
BUICK V8 '67-'76, 400-430-455 cu. in. .150" offset	2	YES	-	4	8	4	.8415"	1.590"	126g	-	.700"	66261-16	66261H-16
CHEVROLET V6 90° '78-'86, 200-229-262(4.3L) cu. in. w/V8 oiling	2	-	-	-	12	-	.8415"	1.590"	106g	-	.700"	66289-12	66289H-12
CHEVROLET V8 '55 up, 262-400 cu. in.	3	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66290-16	66290H-16
CHEVROLET V8 '55 up, 262-400 cu. in.	3	-	-	-	16	-	.8731"	1.590"	119g	YES	.750"	66290X874-16	66290X874H-16
CHEVROLET V8 '55 up, 262-400 cu. in.	3	YES	-	4	8	4	.8415"	1.590"	112g	YES	.750"	66292-16	66292H-16
CHEVROLET V8 '55 up, 262-400 cu. in.	3	YES	-	4	8	4	.8731"	1.590"	119g	YES	.750"	66292X874-16	66292X874H-16
CHEVROLET V8 '98-'05, 5.7L SB2 Head/STD. Block	3	YES	YES	8	-	8	.8415"	1.590"	112g	YES	.750"	66282-16	66282H-16
CHEVROLET V8 '98-'05, 5.7L SB2 Head/STD. Block	3	YES	YES	8	-	8	.8731"	1.590"	119g	YES	.750"	66282X874-16	66282X874H-16
CHEVROLET V8 5.7L SB2/SB2	3	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66283-16	66283H-16
CHEVROLET V8 5.7L SB2/SB2	3	-	-	-	16	-	.8731"	1.590"	119g	YES	.750"	66283X874-16	66283X874H-16
CHEVROLET V8 262-400 cu. in. w/Dart Buick cyl head	3	YES	YES	16	-	-	.8415"	1.590"	112g	YES	.750"	66252-16	66252H-16
CHEVROLET V8 2000-up 5.7L LS1/LS7 & Vortec 4800, 5300, 6000 Higher blade for base circle clearance	3	-	-	-	16	-	.8415"	1.590"	130g	-	.750"	66278T-16	66278TH-16
CHEVROLET V8 '64-up 396-572 cu. in., fits tall lifter bore	3	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66291-16	66291H-16
CHEVROLET V8 '64-up 396-572 cu. in., fits tall lifter bore	3	-	-	-	16	-	.8731"	1.590"	119g	YES	.750"	66291X874-16	66291X874H-16
CHEVROLET V8 '64-up 396-572 cu. in., fits tall lifter bore	3	YES	-	4	8	4	.8415"	1.590"	112g	YES	.750"	66293-16	66293H-16
CHEVROLET V8 '64-up 396-572 cu. in., fits tall lifter bore	3	YES	-	4	8	4	.8731"	1.590"	119g	YES	.750"	66293X874-16	66293X874H-16
CHRYSLER V8 383-440 Chrysler/Stage V w/pushrod oiling, shielded bearing	3	-	-	-	16	-	.9031"	1.340"	116g	-	.750"	66384-16	66384H-16
CHRYSLER V8 340 Small Block, Nascar Block	3	-	-	-	-	-	-	-	-	-	-	66245-16	66245H-16
FORD 240 -330 6 cyl	3	-	-	-	12	-	.8731"	1.730"	126g	-	.750"	66214-16	66214H-16
FORD V8 221-302-351 W '62-up	3	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66215-16	66215H-16
FORD V8 390-427 FE '63-up	3	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66216-16	66216H-16
FORD V8 370-460 '68-up	3	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66217-16	66217H-16
FORD V8 351C-351M-400 '63-up	3	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66218-16	66218H-16
FORD V8 429 Boss "Z" Bar	3	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66219-16	66219H-16
FORD V8 289-351 W w/intake & exhaust offset	3	YES	YES	8	-	8	.8731"	1.730"	126g	-	.750"	66377-16	66377H-16
FORD V8 289-351 W w/intake offset	3	YES	-	-	8	8	.8731"	1.730"	126g	-	.750"	66378-16	66378H-16
FORD V8 429-460 w/intake offset	3	YES	-	-	8	8	.8731"	1.730"	126g	-	.750"	66379-16	66379H-16
HOLDEN V8 Early Model	3	-	-	-	-	-	.8415"	1.740"	127g	-	.750"	66262-16	66262H-16
HOLDEN V8 Series Late Model	3	-	-	-	-	-	.8415"	1.720"	127g	-	.750"	66264-16	66264H-16
HOLDEN Inline 6 cylinder	3	-	-	-	-	-	.8415"	1.740"	127g	-	.750"	66263-12	66263H-12
OLDSMOBILE V8 260-455 cu. in. '64-'84	3	-	-	-	16	-	.8415"	1.720"	120g	-	.750"	66294-16	66294H-16
OLDSMOBILE V8 400-455 cu. in.	3	YES	-	-	-	-	.8415"	-	130g	-	.750"	66387-16	66387H-16
PONTIAC V8 326-455 cu. in. '55-'81	3	-	-	-	16	-	.8415"	1.720"	120g	-	.750"	66294-16	66294H-16
PONTIAC V8 326-455 cu. in. '55-'81	3	YES	-	4	8	4	.8415"	1.720"	120g	-	.750"	66295-16	66295H-16

Warning: Never submerge roller lifters in parts washers due to possible contamination from suspended metal fines in the solvent.

Spring Groups: #2 680-750 lbs. • #3 750-900 lbs. (See Page 124 for details.)

Solid Roller Lifters

Photo Shown
Part # 66291X903H-16




SEVERE-DUTY / OVERSIZED BEARING

Crowder offers a series of Severe-Duty roller lifters designed for full race use. Features an integral one piece body, CNC machined from special alloy and heat treated for the best possible wear. Utilizes larger diameter bearings with thicker wall than standard designs to withstand today's high performance race applications. Lifters are available with Hi Pressure Pin Oiling (HIPPO) option. Oil restrictors are not recommended when running Crowder roller lifters.

Description	Spring Pressure Group	Intake Offset	Exhaust Offset	Pushrod Seat Left	Pushrod Seat Center	Pushrod Seat Right	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Tall Lifter Bore Block	Bearing O.D.	Part No.	Part No. w/HIPPO
CHEVROLET V8 '55-up 262-400 cu. in.	5	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66290X903-16	66290X903H-16
CHEVROLET V8 '55-up 262-400 cu. in.	8	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	-	66290X937H-16
CHEVROLET V8 '55-up 262-400 cu. in. intake offset	5	YES	-	4	8	4	.9031"	1.590"	130g	YES	.812"	66292X903-16	66292X903H-16
CHEVROLET V8 '55-up 262-400 cu. in. intake offset	8	YES	-	4	8	4	.9361"	1.430"	133g	YES	.850"	-	66292X937H-16
CHEVROLET V8 2000-up 5.7L LS1/LS7 & Vortec 4800, 5300, 6000 W/ Oversized Bearings Tall Body	5	NO	-	-	16	-	.9031"	1.590"	-	YES	.812"	66278X903T-16	66278X903TH-16
CHEVROLET V8 '98-'05, 5.7L SB2 Head/STD. Block intake offset	5	YES	YES	8	-	8	.9031"	1.590"	130g	YES	.812"	66282X903-16	66282X903H-16
CHEVROLET V8 '98-'05, 5.7L SB2 Head/STD. Block intake offset	8	YES	YES	8	-	8	.9361"	1.430"	133g	YES	.850"	-	66282X937H-16
CHEVROLET V8 '98-05, 5.7L SB2 Head / SB2 Block	5	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66283X903-16	66283X903H-16
CHEVROLET V8 '98-05, 5.7L SB2 Head / SB2 Block	8	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	-	66283X937H-16
CHEVROLET V8 '64-up Big Block, fits tall lifter bore.	5	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66291X903-16	66291X903H-16
CHEVROLET V8 '64-up Big Block, fits tall lifter bore.	8	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	-	66291X937H-16
CHEVROLET V8 '64-up Big Block 396-572 cu. in.	5	YES	-	4	8	4	.9031"	1.590"	130g	YES	.812"	66293X903-16	66293X903H-16
CHEVROLET V8 '64-up Big Block 396-572 cu. in.	8	YES	-	4	8	4	.9361"	1.430"	133g	YES	.850"	-	66293X937H-16
CHRYSLER V8 440"B" - 426 w/pushrod oiling	5	-	-	-	16	-	.9031"	1.340"	122g	-	.812"	66233-16	66233H-16
CHRYSLER V8 340 59° with or without pushrod oiling	5	-	-	-	16	-	.9031"	1.340"	113g	-	.812"	66234X903-16	66234X903H-16
CHRYSLER V8 R3 48° Block *May require oil feed modifications	5	-	-	-	16	-	.9031"	1.340"	113g	-	.812"	66235X903-16	66235X903H-16
CHRYSLER V8 340 with or without pushrod oiling intake offset	5	YES	-	4	8	4	.9031"	1.340"	113g	-	.812"	66238X903-16	66238X903H-16
CHRYSLER V8 360 Magnum w/pushrod oiling	5	-	-	-	16	-	.9031"	1.340"	122g	-	.812"	66236-16	66236H-16
CHRYSLER V8 340 w/pushrod oiling/inboard blade	5	-	-	-	16	-	.9031"	1.340"	117g	-	.812"	66237-16	66237H-16
CHRYSLER 440 Indy & KB block intake offset .903 od	5	YES	-	4	8	4	.9031"	1.590"	130g	-	.812"	66246-16	66246H-16
CHRYSLER 440 Indy & KB block all center	5	YES	-	-	16	-	.9031"	1.590"	130g	-	.812"	66246-16	66246H-16
CHRYSLER 440 Mopar Performance or Mega Block Intake offset .903 od	5	YES	-	4	8	4	.9031"	1.590"	130g	-	.812"	66247-16	66247H-16
CHRYSLER Hemi, KB & Gen 2 all centers .903 Od	-	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66248-16	66248H-16
FORD 289-351 .903 dia.	5	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66215X903-16	66215X903H-16
FORD 289-351 .937 dia.	8	-	-	-	16	-	.9370"	1.590"	130g	-	.850"	-	66215X937H-16
FORD 289-351W w/intake offset	5	YES	-	-	8	8	.9031"	1.590"	130g	-	.812"	66378X903-16	66378X903H-16
FORD 289-351W w/intake offset	5	YES	-	-	8	8	.9031"	1.590"	130g	-	.812"	66378X903T-16	66378X903TH-16
FORD 289-351W w/intake offset	8	YES	-	-	8	8	.9361"	1.430"	133g	-	.850"	-	66378X937H-16
FORD 370-429-460 .903" OD with High Pressure Pin Oiling													
FORD 429 Boss "Z" Bar	5	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66219X903-16	66219X903H-16
FORD 429-460 intake offset	5	YES	-	-	8	8	.9031"	1.590"	130g	-	.812"	66379X903-16	66379X903H-16
FORD 429-460 intake offset	8	YES	-	-	8	8	.9361"	1.430"	133g	-	.850"	-	66379X937H-16

Spring Groups: #5 1000-1300 lbs. • #8 1200-1450 lbs. (See Page 124 for details.)

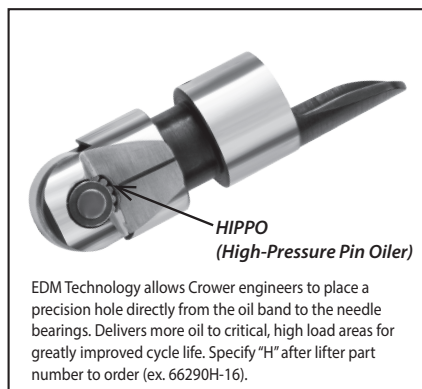

Crowder roller lifters are rebuildable.

For High Pressure Pin Oiling (HIPPO), specify "H" after p/n.

Roller Lifter Sizes & Bore Sizes

Roller Lifter Size	Aluminum Block Lifter Bore	Cast Iron Block Lifter Bore
+/- .0002 tolerance	.001/.0015 clearance	.002/.0025 clearance
.8415"	.8425"/.8430"	.8435"/.8440"
.8731"	.8741"/.8746"	.8751"/.8756"
.9031"	.9041"/.9046"	.9051"/.9056"
.9361"	.9371"/.9376"	.9381"/.9386"
.9890"	.9900"/.9905"	.9910"/.9915"
.9975"	.9985"/.9990"	.9995"/1.000"

Note: OIL RESTRICTORS ARE NOT RECOMMENDED

Raised Seat Roller Lifters

RAISED SEAT ROLLER LIFTERS

All Crower lifters are designed to meet racers ever changing engine combinations. Many of the late model blocks have taller lifter bores, so using standard seat height lifters with an offset required manual notching of the lifter bore for pushrod clearance. We have developed a lifter with +.300" higher pushrod seat to solve this problem. No more need to notch the block for pushrod clearance and you'll use a .300" shorter pushrod creating the extra advantage of reduced flex and weight. Our lightweight billet alloy bodies are paired with our beefy stainless steel alignment blade. Oil restrictors are not recommended when running Crower roller lifters.

Crower Raised Seat lifters are available with needle bearings, needle bearing with high pressure pin oiling or in the bushed "EnduraMax" design. They are available in .842" and .903" diameters with centered or .150 seat offset. **American made at our state of the art facility in San Diego, CA.**

Description	Spring Pressure Group	Intake Offset	Exhaust Offset	Pushrod Left	Seat Center	Location Right	Lifter Body Diameter	Pushrod Seat Height	Weight	Bearing O.D.	Part No.
SBC Cutaway .842 O.D. EnduraMax	4	-	-	-	16	-	.8415	1.890	131g	.750	66490X842E-16
SBC Cutaway .903 O.D. EnduraMax	6	-	-	-	16	-	.9031	1.890	153g	.812	66490X903E-16
SBC Cutaway .903 O.D. With Hi Pressure Pin Oiling (Set 16)	5	-	-	-	16	-	.9031	1.890	153g	.812	66490X903H-16
SBC Cutaway 86 Up & Bowtie	3	-	-	-	16	-	.8415	1.890	131g	.750	66490-16
SBC Cutaway .842 O.D. with Hi Pressure Pin Oiling	3	-	-	-	16	-	.8415	1.890	131g	.750	66490H-16
SBC Cutaway Intake Offset	3	Yes	-	4	8	4	.8415	1.890	131g	.750	66492-16
SBC Cutaway Intake Offset with Hi Pressure Pin Oiling	3	Yes	-	4	8	4	.8415	1.890	131g	.750	66492H-16
SBC Cutaway Intake Offset .842 O.D. EnduraMax	4	Yes	-	4	8	4	.8415	1.890	131g	.750	66492X842E-16
SBC Cutaway Intake Offset .903 O.D. EnduraMax	6	Yes	-	4	8	4	.9031	1.890	153g	.812	66492X903E-16
SBC Cutaway Intake Offset .903 O.D. With Hi Pressure Pin Oiling	5	Yes	-	4	8	4	.9031	1.890	153g	.812	66492X903H-16
BBC & Big Chief Intake Offset .300" Taller Body	3	Yes	-	4	8	4	.8415	1.890	131g	.750	66493-16
BBC & Big Chief Intake Offset With Hi Pressure Pin Oiling	3	Yes	-	4	8	4	.8415	1.890	131g	.750	66493H-16
BBC & Big Chief Intake Offset .842 O.D. EnduraMax	4	Yes	-	4	8	4	.8415	1.890	131g	.750	66493X842E-16
BBC & Big Chief Int Offset .903 O.D.	5	Yes	-	4	8	4	.9031	1.890	153g	.812	66493X903-16
BBC & Big Chief Intake Offset .903 O.D. EnduraMax	6	Yes	-	4	8	4	.9031	1.890	153g	.812	66493X903E-16
BBC & Big Chief Intake Offset .903 O.D. With Hi Pressure Pin Oiling	5	Yes	-	4	8	4	.9031	1.890	153g	.812	66493X903H-16
BBC Cutaway .842 O.D.	3	-	-	-	16	-	.8415	1.890	131g	.750	66491-16
BBC Cutaway .842 O.D. With Hi Pressure Pin Oiling	3	-	-	-	16	-	.8415	1.890	131g	.750	66491H-16
BBC Cutaway .842 O.D. EnduraMax	4	-	-	-	16	-	.8415	1.890	131g	.750	66491X842E-16
BBC Cutaway .903 O.D. EnduraMax	6	-	-	-	16	-	.9031	1.890	153g	.812	66491X903E-16
BBC Cutaway .903 O.D. With Hi Pressure Pin Oiling (Set 16)	5	-	-	-	16	-	.9031	1.890	153g	.812	66491X903H-16
Pontiac V8 .903 O.D.	6	Yes	-	4	8	4	.9031	1.890	153g	.812	66495X903E-16
Pontiac V8 .903 O.D.	5	Yes	-	4	8	4	.9031	1.890	153g	.812	66495X903H-16
Pontiac EnduraMax Rollers Raised Seat .842 Od	4	-	-	-	16	-	.8415	1.890	131g	.750	66494X842E-16
Pontiac Severe Duty Rollers With Hi Pressure Pin Oiling	4	-	-	-	16	-	.8415	1.890	131g	.750	66494X842H-16
Pontiac EnduraMax Roller Lifters Raised Seat .903 Od (For .904 Lifter Bore)	6	-	-	-	16	-	.9031	1.890	153g	.812	66494X903E-16
Pontiac Severe Duty Rollers Raised Seat.903 Od With Hi Pressure Pin Oiling	6	-	-	-	16	-	.9031	1.890	153g	.812	66494X903H-16

Spring Groups: #3 750-900 lbs. • #4 900-1000 lbs. • #5 1000-1300 lbs. • #6 1050-1350 lbs. (See Page 124 for details.)

MAXIMUS SERIES ROLLER LIFTERS

Maximus Series Roller Lifters feature a High Strength Alloy Steel Body, carburized for strength and wear resistance. A beefy stainless steel alignment blade and precision ground mounting pad ensure a perfect alignment. The finest bearing quality steel available, heat treated to our spec., gives our outer race the best rolling element and

highest impact loading possible. Riding on precision sorted, contoured & micro polished needles. These roll on a tool steel axle, heat treated to material specifications for maximum strength, hardness, and reliability. Then precision ground to size and roundness, and micro polish finished. Oil restrictors are not recommended when running Crower roller lifters.



Description	Spring Pressure Group	Intake Offset	Exhaust Offset	Pushrod Left	Seat Center	Location Right	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Tall Lifter Bore Block*	Bearing O.D.	Part No.
"NEW" BAE, RODECK, TFX-92, KB, JP-1 w/standard to .200" spread lifter bore spacing No pushrod oiling.	10	-	-	-	16	-	1.062"	1.525" w/.375 ball	165g	-	.920"	66230M-16
CHRYSLER V8 426 Hemi w/pushrod oiling 1.000 dia.	10	-	-	-	16	-	.9975"	1.340"	142g	-	.920"	66271M-16
CHRYSLER V8 426 Hemi 1.000 dia.	10	-	-	-	16	-	.9975"	1.340"	142g	-	.920"	66272M-16
CHRYSLER V8 426 .903 dia.	7	-	-	-	16	-	.9031"	1.340"	121g	-	.812"	66284M-16
CHRYSLER V8 426 Hemi .903 dia. +.120 pushrod seat	7	-	-	-	16	-	.9031"	1.460"	129g	-	.812"	66285M-16
CHRYSLER V8 426 Hemi .903 dia. w/BA blade +.120 pushrod seat	7	-	-	-	16	-	.9031"	1.460"	129g	-	.812"	66285MB-16
CHRYSLER V8 Arias 8.3L (std seat height) .903 dia.	7	-	-	-	16	-	.9031"	1.340"	121g	-	.812"	66284AM-16
CHRYSLER V8 Arias 8.3L (+.120 seat height) .903 dia.	7	-	-	-	16	-	.9031"	1.460"	129g	-	.812"	66285AM-16
CHRYSLER V8 Arias 10.0L (std seat height) .903 dia.	7	-	-	-	16	-	.9031"	1.340"	121g	-	.812"	66284ATM-16
CHRYSLER V8 Arias 10.0L (+.120 seat height) .903 dia.	7	-	-	-	16	-	.9031"	1.460"	129g	-	.812"	66285ATM-16

Spring Groups: #7 1150-1350 lbs. • #10 1400 - + lbs. (See Page 124 for details.)

Solid Roller Lifters

ENDURA^{max}

NEEDLELESS ROLLERS

EnduraMax lifters feature a needleless roller bushing allowing for a greater load handling ability and more durability. They are available in all popular sizes and come standard with Crower's HIPPO (High Pressure Pin Oiling) to help keep the roller and shaft lubricated.

EnduraMax lifters are the choice of serious racers, and have been race proven to be the longest lasting lifter on the market.



Crower roller lifters are fully rebuildable.

We can convert any Crower roller with .317" or .363" axle, to EnduraMax Needleless Bearings. EnduraMax rollers must be equipped with HIPPO oiling. HIPPO oiling can be added to most Crower roller lifters when being converted to EnduraMax bearing.

Solid Roller Lifters

ENDURA^{max} *The choice of serious racers*

Oil restrictors are not recommended when running Crower roller lifters.

Description	Spring Pressure Group	Intake Offset	Exhaust Offset	Pushrod Left	Seat Center	Location Right	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Tall Lifter Bore Block	Bearing O.D.	Part No.
CHEVROLET V8 Small Block	4	-	-	-	16	-	.8415"	-	-	YES	.750"	66200E-16
CHEVROLET V8 Small Block .300 taller body	4	-	-	-	16	-	.8415"	-	-	YES	.750"	66200TE-16
CHEVROLET V8 Small Block	4	-	-	-	16	-	.8731"	-	-	YES	.750"	66200X874E-16
CHEVROLET V8 Big Block .300 taller body	4	-	-	-	16	-	.8415"	-	-	YES	.750"	66201TE-16
CHEVROLET V8 Big Block	4	-	-	-	16	-	.8415"	-	-	YES	.750"	66201E-16
CHEVROLET V8 Big Block	4	-	-	-	16	-	.8731"	-	-	YES	.750"	66201X874E-16
CHEVROLET SBC V8 262-400 cu. in. .842 dia. centers	4	-	-	4	8	4	.8415"	3.200"	-	YES	.750"	66275E-16
CHEVROLET SBC V8 262-400 cu. in. .874 dia. centers	4	-	-	4	8	4	.8731"	3.200"	-	YES	.750"	66277E-16
CHEVROLET SBC V8 262-400 cu. in. .842 dia. centers	4	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66290X842E-16
CHEVROLET SBC V8 262-400 cu. in. .874 dia. centers	4	-	-	-	16	-	.8731"	1.590"	119g	YES	.750"	66290X874E-16
CHEVROLET SBC V8 262-400 cu. in. .903 dia. centers	6	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66290X903E-16
CHEVROLET SBC V8 262-400 cu. in. .937 dia. centers	9	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	66290X937E-16
CHEVROLET SBC V8 262-400 cu. in. .842 dia. intake offset .150"	4	YES	-	4	8	4	.8415"	1.590"	112g	YES	.750"	66292X842E-16
CHEVROLET SBC V8 262-400 cu. in. .874 dia. intake offset .150"	4	YES	-	4	8	4	.8731"	1.590"	119g	YES	.750"	66292X874E-16
CHEVROLET SBC V8 262-400 cu. in. .903 dia. intake offset .150"	6	YES	-	4	8	4	.9031"	1.590"	130g	YES	.812"	66292X903E-16
CHEVROLET SBC V8 262-400 cu. in. .937 dia. intake offset .150"	9	YES	-	4	8	4	.9361"	1.430"	133g	YES	.850"	66292X937E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/std block .842 dia.	4	YES	YES	8	-	8	.8415"	1.590"	112g	YES	.750"	66282X842E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/std block .874 dia.	4	YES	YES	8	-	8	.8731"	1.590"	119g	YES	.750"	66282X874E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/std block .903 dia.	6	YES	YES	8	-	8	.9031"	1.590"	130g	YES	.812"	66282X903E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/std block .937 dia.	9	YES	YES	8	-	8	.9361"	1.430"	133g	YES	.850"	66282X937E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/SB2 Block .842 dia. centers only	4	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66283X842E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/SB2 Block .874 dia. centers only	4	-	-	-	16	-	.8731"	1.590"	119g	YES	.750"	66283X874E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/SB2 Block .903 dia. centers only	6	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66283X903E-16
CHEVROLET V8 262-400 cu. in. SB2 Head w/SB2 Block .937 dia. centers only	9	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	66283X937E-16
CHEVROLET Enduramax Roller Lifters Chevy '58-'65 348-409 cu in.	4	-	-	-	16	-	.8415"	1.740"	126g	YES	.750"	66204E-16
CHEVROLET BBC V8 396-572 cu. in. .842 dia. centers	4	-	-	-	16	-	.8415"	1.590"	112g	YES	.750"	66291X842E-16
CHEVROLET BBC V8 396-572 cu. in. .874 dia. centers	4	-	-	-	16	-	.8731"	1.590"	119g	YES	.750"	66291X874E-16
CHEVROLET BBC V8 396-572 cu. in. .903 dia. centers	6	-	-	-	16	-	.9031"	1.590"	130g	YES	.812"	66291X903E-16
CHEVROLET BBC V8 396-572 cu. in. .937 dia. centers	9	-	-	-	16	-	.9361"	1.430"	133g	YES	.850"	66291X937E-16
CHEVROLET BBC V8 396-572 cu. in. .842 dia. intake offset .150	4	YES	-	4	8	4	.8415"	1.590"	112g	YES	.750"	66293X842E-16
CHEVROLET BBC V8 396-572 cu. in. .874 dia. intake offset .150	4	YES	-	4	8	4	.8731"	1.590"	119g	YES	.750"	66293X874E-16
CHEVROLET BBC V8 396-572 cu. in. .903 dia. intake offset .150	6	YES	-	4	8	4	.9031"	1.590"	130g	YES	.812"	66293X903E-16
CHEVROLET BBC V8 396-572 cu. in. .937 dia. intake offset .150	9	YES	-	4	8	4	.9361"	1.430"	133g	YES	.850"	66293X937E-16
CHEVROLET V8 2000-up 5.7L LS1/LS7	4	-	-	-	16	-	.8415"	1.590"	130g	-	.750"	66278E-16
CHEVROLET V8 2000-up 5.7L LS1/LS7 Tall Body	4	-	-	-	16	-	.8415"	1.590"	130g	-	.750"	66278TE-16
CHEVROLET V8 2000-up 5.7L LS1/LS7 Tall Body	6	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66278X903TE-16
FORD V8 62' up 221-302-351W .874 dia.	4	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66215E-16
FORD V8 62' up 221-302-351W .903 dia.	6	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66215X903E-16
FORD V8 62' up 221-302-351W .937 dia.	9	-	-	-	16	-	.9361"	1.430"	133g	-	.850"	66215X937E-16
FORD V8 63' up 390-427FE .874 dia.	4	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66216E-16
FORD V8 63' up 390-427FE .903 dia.	6	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66216X903E-16
FORD V8 63' up 390-427FE .937 dia.	9	-	-	-	16	-	.9361"	1.430"	133g	-	.850"	66216X937E-16

Spring Groups: #4 900-1000 lbs. • #6 1050-1350 lbs. • #9 1250-1450 lbs. (See Page 124 for details.)

Solid Roller Lifters

ENDURA^{max}


The choice of serious racers

Oil restrictors are not recommended when running Crower roller lifters.

Description	Spring Pressure Group	Intake Offset	Exhaust Offset	Pushrod Left	Seat Center	Location Right	Lifter Body Diameter	Pushrod Seat Height	Lifter Weight	Tall Lifter Bore Block*	Bearing O.D.	Part No.
FORD V8 68' up 370-460 .874 dia.	4	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66217E-16
FORD V8 68' up 370-460 .903 dia.	6	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66217X903E-16
FORD V8 68' up 370-460 .937 dia	9	-	-	-	16	-	.9361"	1.430"	133g	-	.850"	66217X937E-16
FORD V8 63' up 351C-351M-400 .874 dia.	4	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66218E-16
FORD V8 63' up 351C-351M-400 .903 dia.	6	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66218X903E-16
FORD V8 63' up 351C-351M-400 .937 dia.	9	-	-	-	16	-	.9361"	1.430"	133g	-	.850"	66218X937E-16
FORD V8 429 Boss "Z" Bar .874 dia.	4	-	-	-	16	-	.8731"	1.730"	126g	-	.750"	66219E-16
FORD V8 429 Boss "Z" Bar	6	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66219X903E-16
FORD V8 289-351W .874 dia. intake offset .150	4	-	-	-	8	8	.8731"	1.730"	126g	-	.750"	66378E-16
FORD V8 289-351W .903 dia. intake offset .150	6	-	-	-	8	8	.9031"	1.590"	130g	-	.812"	66378X903E-16
FORD V8 289-351W .937 dia. intake offset .150	9	-	-	-	8	8	.9361"	1.430"	133g	-	.850"	66378X937E-16
FORD V8 429-460 .874 dia. intake offset .150	4	-	-	-	8	8	.8731"	1.730"	126g	-	.750"	66379E-16
FORD V8 429-460 .903 dia. intake offset .150	6	-	-	-	8	8	.9031"	1.590"	130g	-	.812"	66379X903E-16
FORD V8 429-460 .937 dia. intake offset .150	9	-	-	-	8	8	.9361"	1.430"	133g	-	.850"	66379X937E-16
HOLDEN V8 Early Model	4	-	-	-	-	-	.8415"	1.740"	-	-	.750"	66262E-16
HOLDEN V8 2S Series	4	-	-	-	-	-	.8415"	1.720"	-	-	.750"	66264E-16
HOLDEN Inline 6 cylinder	4	-	-	-	-	-	.8415"	1.740"	-	-	.750"	66263E-12
CHRYSLER 440 Indy & KB block intake offset .903 od	5	YES	-	4	8	4	.9031"	1.590"	130g	-	.812"	66246E-16
CHRYSLER 440 Mopar Performance or Mega Block Intake offset .903 od	5	YES	-	4	8	4	.9031"	1.590"	130g	-	.812"	66247E-16
CHRYSLER Hemi, KB & Gen 2 all centers .903 Od	-	-	-	-	16	-	.9031"	1.590"	130g	-	.812"	66248E-16
CHRYSLER V8 426-440 Tall lifter bore block w/pushrod oiling	6	-	-	-	16	-	.9031"	1.340"	-	-	.812"	66233E-16
OLDSMOBILE V8 260-455 cu. in.	4	-	-	-	16	-	.8415"	1.720"	-	-	.750"	66294E-16
PONTIAC V8 326-455 cu. in.	4	-	-	-	16	-	.8415"	1.720"	-	-	.750"	66294E-16
PONTIAC V8 '55-'81 326-455 cu. in.	4	YES	-	4	8	4	.8415"	1.720"	-	-	.750"	66295E-16
PONTIAC V8 '55-up 326-455 cu. in.	4	-	-	-	16	-	.8415"	1.720"	-	-	.750"	66260E-16

Spring Groups: #4 900-1000 lbs. • #6 1050-1350 lbs. • #9 1250-1450 lbs. (See Page 124 for details.)

Crower roller lifters are rebuildable.

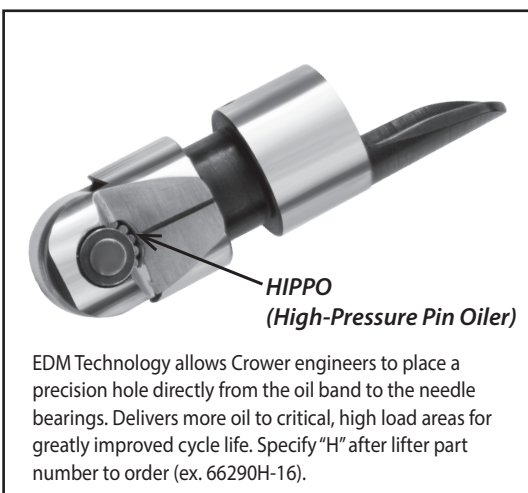

Roller Lifter Sizes & Bore Sizes

Roller Lifter Size	Aluminum Block Lifter Bore	Cast Iron Block Lifter Bore
+/- .0002 tolerance	.001/.0015 clearance	.002/.0025 clearance
.8415"	.8425"/.8430"	.8435"/.8440"
.8731"	.8741"/.8746"	.8751"/.8756"
.9031"	.9041"/.9046"	.9051"/.9056"
.9361"	.9371"/.9376"	.9381"/.9386"
.9890"	.9900"/.9905"	.9910"/.9915"
.9975"	.9985"/.9990"	.9995"/1.000"

Note: OIL RESTRICTORS ARE NOT RECOMMENDED