


USER MANUAL

BlueBoard-LPC214X-H



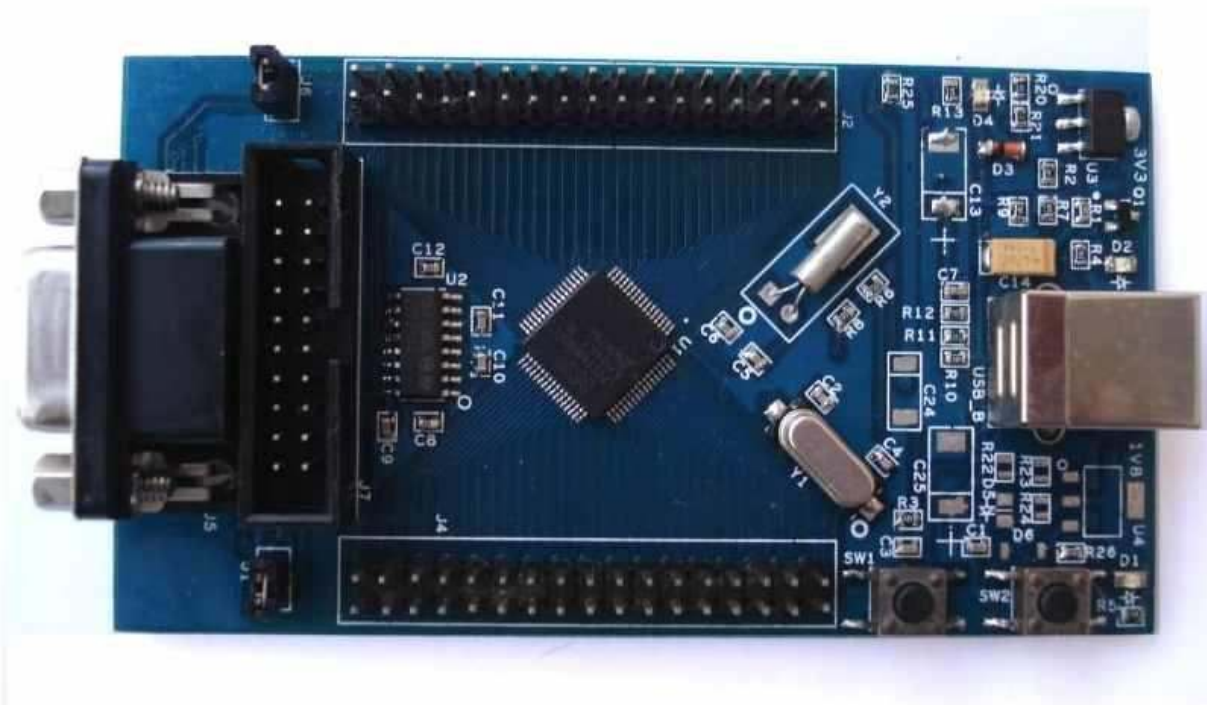

Revision 1.0

Author: Ashwin Athani

For any questions, concerns, or issues submit them to ashwin@ngxtechnologies.com

NGX Technologies Pvt. Ltd. provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, EDUCATION OR EVALUATION PURPOSES ONLY** and is not considered by NGX Technologies Pvt. Ltd to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies NGX Technologies from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

NGX Technologies currently deals with a variety of customers for products, and therefore our arrangement with the user is not exclusive. NGX Technologies assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein.

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages.

No license is granted under any patent right or other intellectual property right of NGX Technologies covering or relating to any machine, process, or combination in which such NGX Technologies products or services might be or are used.

Mailing Address:

#142, 1st Floor, 1st 'C' Cross,
6th 'B' Main, Remco Layout,
Vijaynagar 2nd Stage
Bangalore
India – 560040

Change Log:

Table of Contents

1	INTRODUCTION	5
1.1	BLUEBOARD-LPC214X-H FEATURES	5
2	GET GOING.....	6
2.1	SYSTEM REQUIREMENTS	6
2.2	STARTING OFF.....	6
2.2.1	Connecting the hardware	6
2.2.2	Programming BlueBoard	6
3	BLUEBOARD HARDWARE	7
3.1	FUNCTIONAL OVERVIEW	7
3.2	HARDWARE CONFIGURATIONS	7
4	BLUEBOARD UTILITIES	12
4.1	OVERVIEW	12
4.2	STARTING OFF.....	12
5	TROUBLESHOOTING	13
5.1	USB VIRTUAL COM PORT INSTALLATION FOR WINDOWS XP.....	13
6	SCHEMATICS	16
7	SAMPLE APPLICATIONS	17
8	KNOWN ISSUES.....	18

1 INTRODUCTION

1.1 BlueBoard-lpc214x-H Features

BlueBoard-LPC214X is a breakout board for LPC2148 ARM7TMDI based microcontroller. The LPC2148 microcontroller has 512KB of internal flash and 32+8K RAM. Following are the salient features of the board.

- Dimensions: mm2
- Two layer PCB (FR-4 material)
- Power: USB powered
- ISP and reset switch
- Test LED
- 32Khz crystal for RTC
- Connectors:
 - Extension headers for all microcontroller pins
 - 1 RS232 connector for ISP
 - USB B-type connector with Link-LED
 - 20pin - JTAG connector

2 Get going

2.1 System Requirements

- ✓ Windows XP
- ✓ Serial or Parallel port
- ✓ USB port

2.2 Starting off

2.2.1 Connecting the hardware

After unpacking the BlueBoard connect the USB cable to power up the board. To test all the features on this BlueBoard you would need the following accessories:

1. USB cable
2. DB-9 straight serial cable

Once you have all these accessories connected to the BlueBoard you can run through a simple test to verify that all the peripherals are working fine. Please refer to the 'Hardware Configuration' section for testing all the peripherals. It is highly recommended that you test all the peripherals as soon you receive the BlueBoard. The BlueBoard is shipped with the pre-loaded firmware which can test all the peripherals.

2.2.2 Programming BlueBoard

BlueBoard can be programmed through wiggler clone JTAG or through serial port using 'Flash Magic'. 'Flash Magic' is a freeware windows utility used download the hex file format onto the BlueBoard. Flash Magic can be downloaded from here <http://www.flashmagictool.com/>. If your PC does not have a serial port; use a USB to serial converter to download the hex file using the Flash Magic utility. For programming with JTAG your system should have a parallel port and the supporting IDE which can communicate to the processor core over JTAG interface. We have successfully tested BlueBoard with wiggler clone JTAG and CrossWorks IDE. A LINUX utility to download the hex file can be found here http://www.pjrc.com/arm/lpc2k_pgm/.

- Programming BlueBoard Through ISP.


To program in Manual mode you need a serial cable. Please note that the Blueboard-lpc214x-H only supports manual mode for programming.

To make the board enter programming mode

- Hold down SW1(isp) and SW2(reset), then release SW2 first and finally SW1
- The controller enters the bootloader mode if during reset the SW1 pin is low



3 BlueBoard Hardware

3.1 Functional Overview

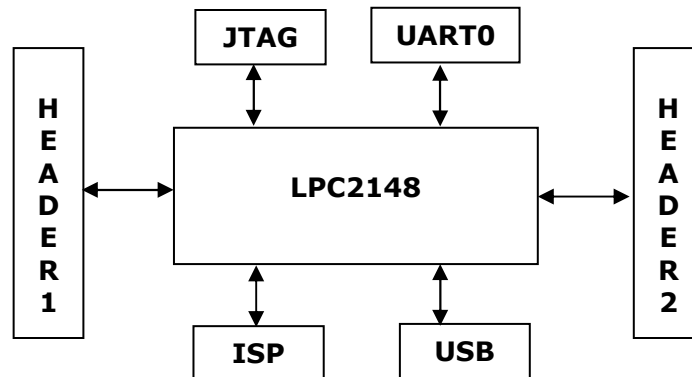

3.2 Hardware Configurations

Blueboard-lpc214x-h header board pin assignments

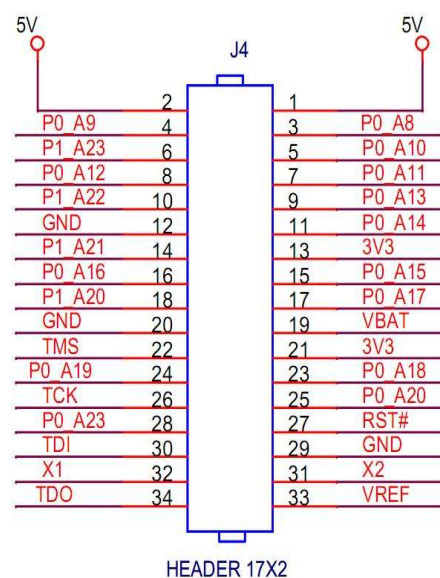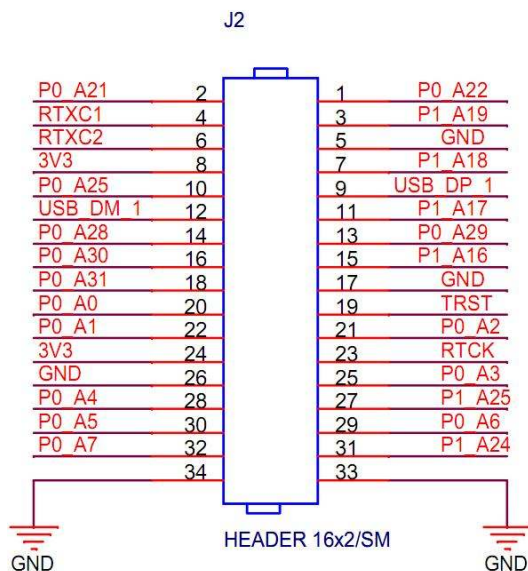

Testing Blueboard-lpc214x-H


The board is shipped with the pre-loaded firmware which can test all the peripherals.

3.2.1. LED

Test Setup: Power the board with USB and you should observe that the LED blinks for a couple of times

3.2.2 UART0



Test setup: Connect jumpers to all pins of J6. Open the hyper terminal as shown in the below image. To test the UART you can use either a full modem or half modem cable.

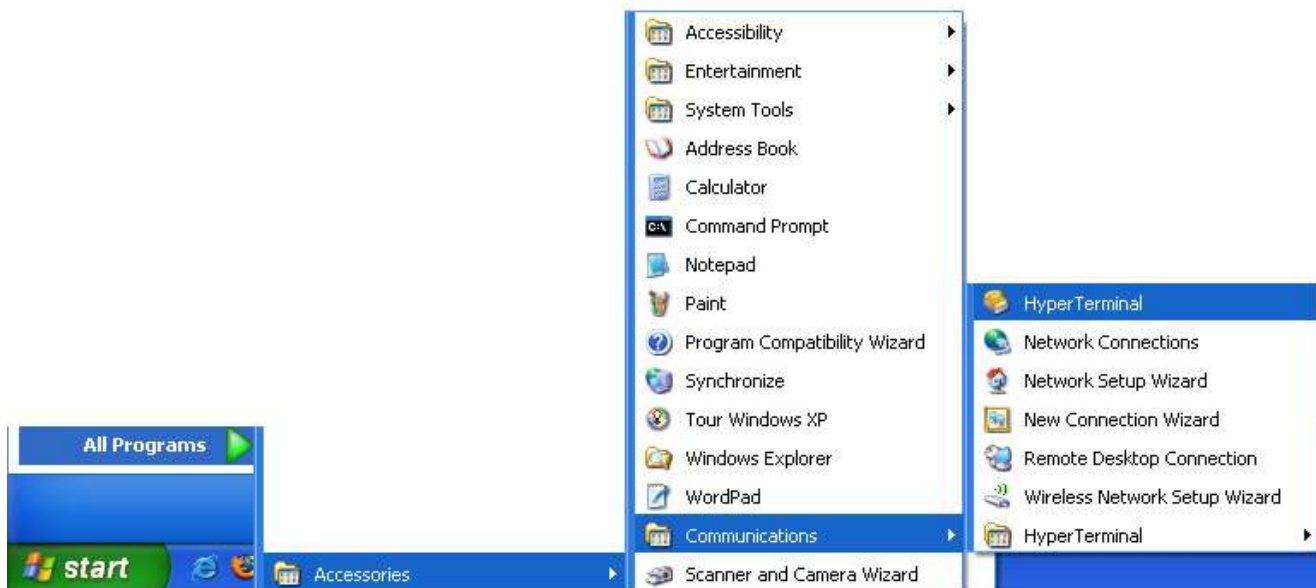


Click on hyper terminal a “Connection Description” window opens. Enter a name under the name tab e.g. BlueBoard and click OK.

A “Connect To” window opens where you have to select the COM port. In this example it is COM1.Click OK.

A “COM1Properties” window appears.Set the values as shown below.Click OK.

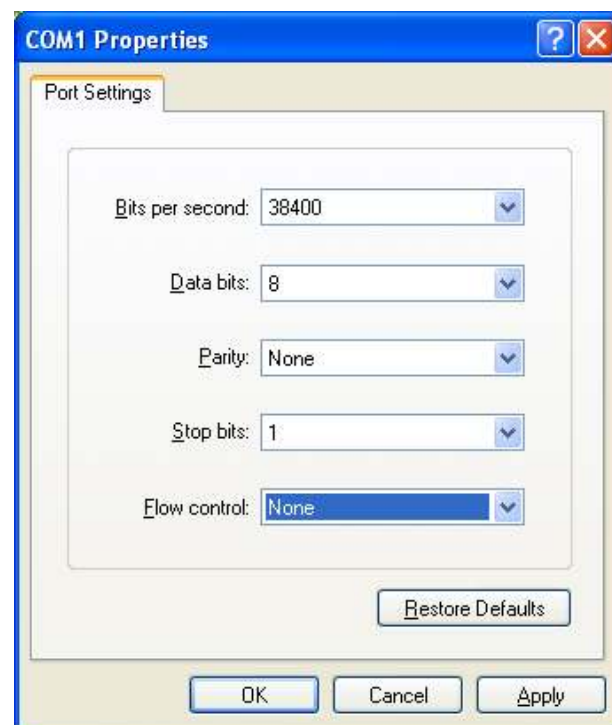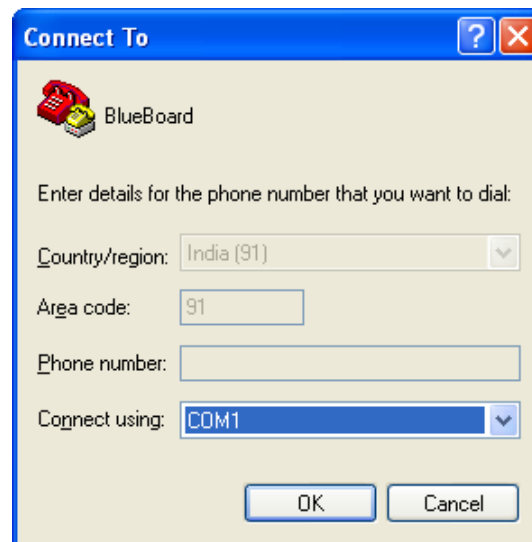


Next an empty "BlueBoard-Hyper Terminal" window opens as shown.

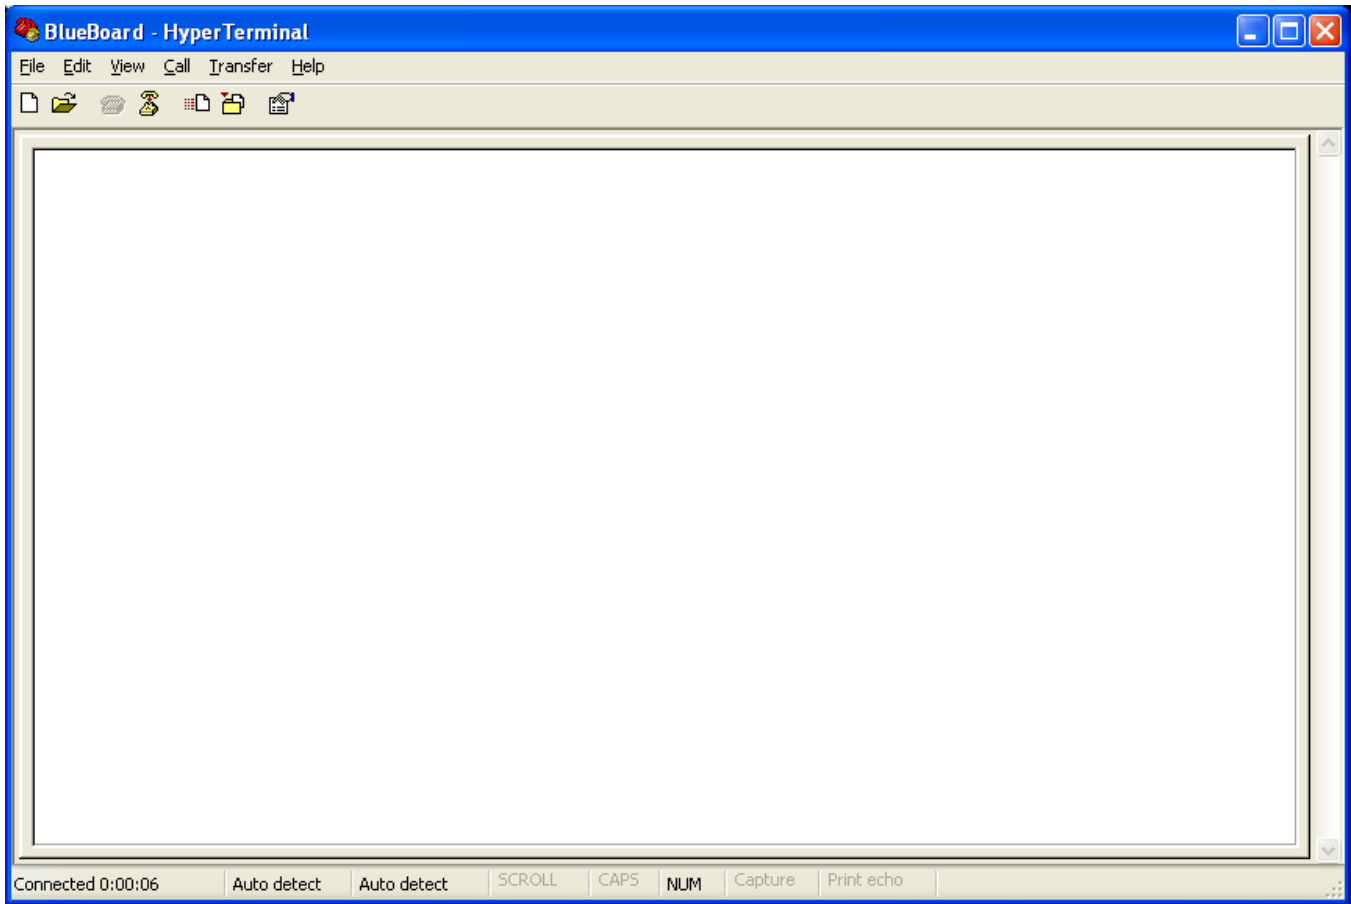

Now make sure that the BlueBoard-lpc2148-H is powered and the serial port is connected to the respective port to be tested (UART0). By pressing any key from keyboard the following message will appear for the respective UART.

For UART0:

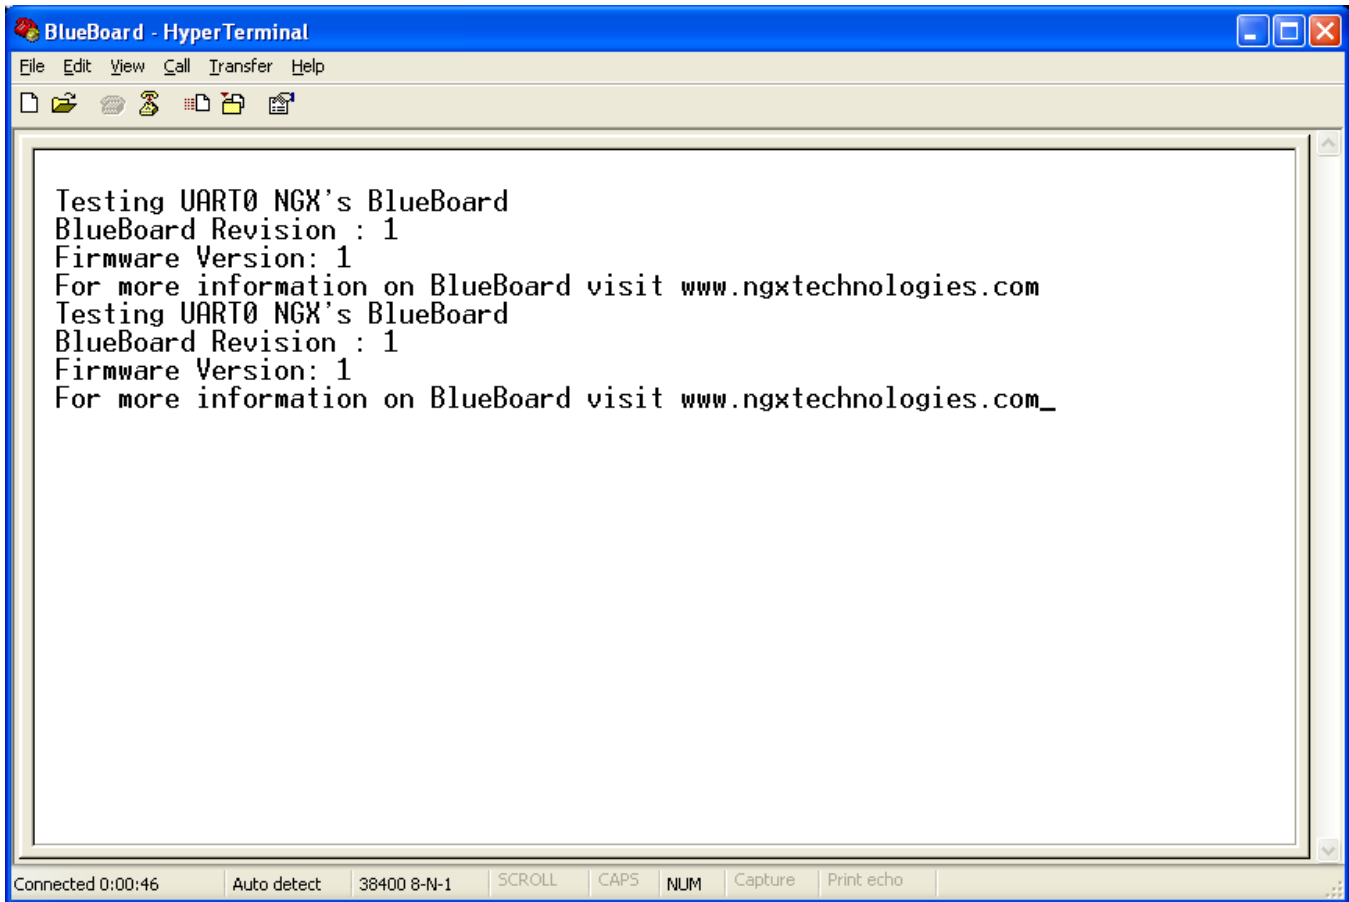

```
BlueBoard - HyperTerminal
File Edit View Call Transfer Help
Testing UART0 NGX's BlueBoard
BlueBoard Revision : 1
Firmware Version: 1
For more information on BlueBoard visit www.ngxtechnologies.com
Testing UART0 NGX's BlueBoard
BlueBoard Revision : 1
Firmware Version: 1
For more information on BlueBoard visit www.ngxtechnologies.com_
Connected 0:00:46 Auto detect 38400 8-N-1 SCROLL CAPS NUM Capture Print echo
```

UART0 can also be used for serial programming.

3.2.3 USB

Before moving ahead with this section, refer to **USB Virtual COM Port Installation for Windows XP** section.

Test setup: Connect the USB cable to USB connector. The power LED (D14) and USB connect LED (D10) turn ON. The USB enumeration can be checked in device manager. The BlueBoard enumerates as a Virtual COM port. To test the Virtual COM port; we can test it as we tested the UART0/1 of BlueBoard.

3.2.4 JTAG connector

Test setup: To enable debugging on the board connect jumper to J11 and connect the JTAG to debug port. We have successfully tested the BlueBoard with JTAG interface using a Wiggler Clone JTAG. To test this feature you need to have the necessary software support on your PC.

Take a look at http://blueboard-lpc214x.googlecode.com/files/NGX_ARM_USB_JTAG.pdf and <http://blueboard-lpc214x.googlecode.com/files/NGX%20parallel%20port%20JTAG.pdf> to know how to use the JTAG interface

4 BlueBoard Utilities

4.1 Overview

For the working with BlueBoard there are certain tools that need to be installed. The tools required to work with BlueBoard are:

- ✓ Flash Magic.

The flash magic tool can be downloaded from the following link:

<http://www.flashmagictool.com/>

For LINUX machines you may use http://www.pjrc.com/arm/lpc2k_pgm/

Tool chain:

To be able to generate the hex or the binary file the user needs to install the tool chain for ARM based microcontrollers. Any toolchain can be used as long as it is able to generate the necessary files for downloading onto the BlueBoard. Here are few toolchain suggestions:

GNUARM ToolChain: <http://winarm.scienceprog.com/winarm-tools/prepare-gnuarm-compiler-toolchain-for-windows.html>

WINARM :

Rowley Crossworks IDE: <http://www.rowley.co.uk/arm/>

Yagarto ToolChain: <http://yagarto.de/>

KEIL: <http://www.keil.com/arm/>

IAR: <http://iar.com/website1/1.0.1.0/3/1/>

4.2 Starting off

The board is shipped with pre-loaded firmware to verify all the above peripherals.


BlueBoard Default Setup:

The blueboard-lpc214x-H will blink the test led for couple times and then will initialize the UART and USB peripherals. A default message is dumped on the UART on power up. It also enumerates as USB virtual COM.

5 Troubleshooting

5.1 USB Virtual COM Port Installation For Windows XP

The USB in BlueBoard might not get enumerated if it does not find the appropriate driver for it. To check USB enumeration status Right Click on "My Computer" icon and select Manage. A "Computer Management" window opens. In this select Device Manager as shown below:

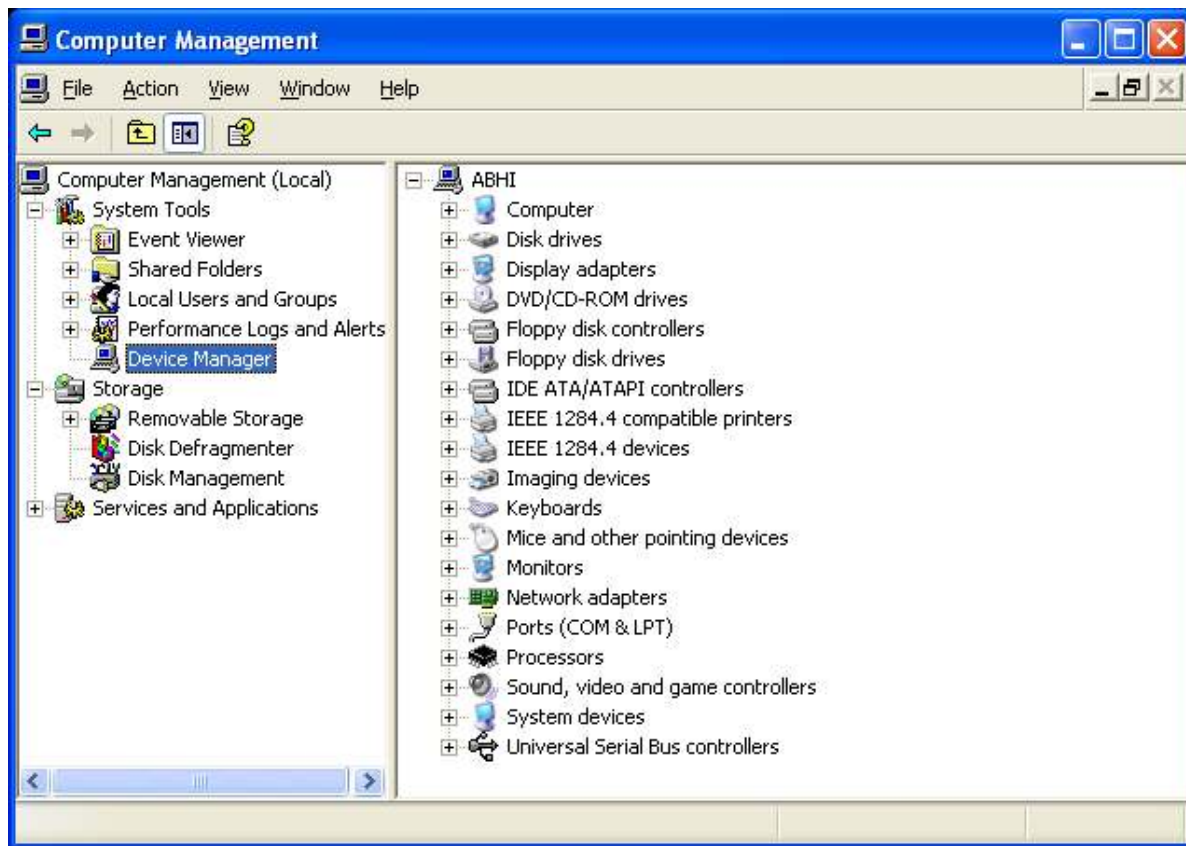

The device uses the *usbser.sys* driver. This driver file is not unpacked in Windows by default and needs to be extracted from a Windows .cab file which should be in the C:\WINDOWS\Driver Cache\i386 directory for Windows XP SP2. Change directory to **C:\WINDOWS\Driver Cache\i386** expand the CAB file by running the below command in Command-Prompt

```
expand sp2.cab -f:usbser.sys C:\WINDOWS\system32\drivers
```


Note: On some systems like the XP home edition; extraction of driver files from cab files might not be supported. In such situation the user can download the *usbser.sys* file from <http://blueboard-lpc214x.googlecode.com/files/usbser.sys> and copy it to C:\WINDOWS\system32\drivers folder

Next, download the usbser.inf file from <http://blueboard-lpc214x.googlecode.com/files/usbser.inf>

Place it in any convenient folder

Plug in the device

A Hardware Update Wizard opens up. Select the second option as shown and Click Next.

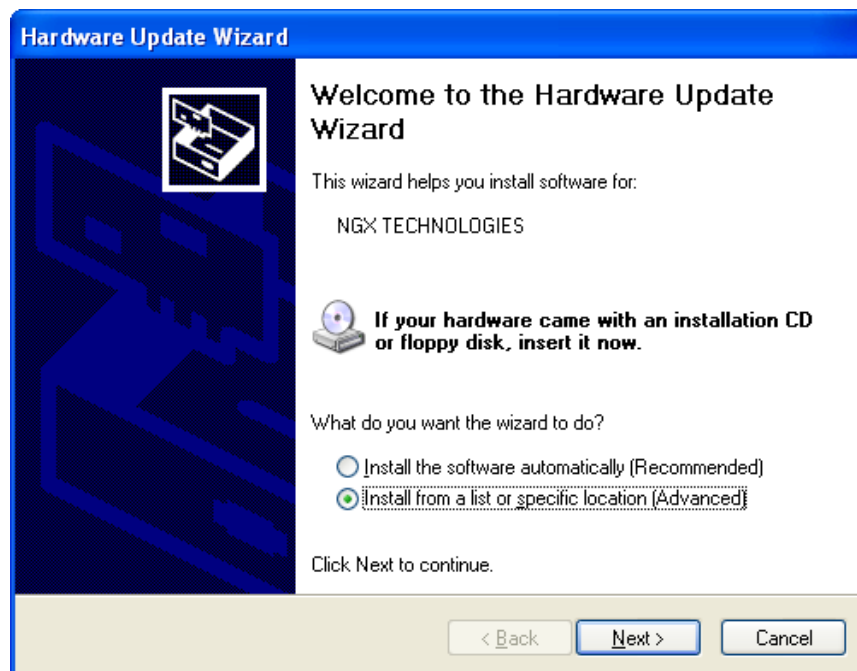

Note: If the wizard does not open up automatically then the user needs to go the 'Device Manager' window and right click on the device and select 'update driver'


Set the new hardware Wizard to search a specific location for the driver, and specify the folder containing usbser.inf

The Wizard will prompt for the location of usbser.sys. Specify its location

(i.e. C:\WINDOWS\system32\drivers) and Click Next.

The installation should now complete and indicate the device has been installed. The device should now get enumerated under "**Ports(COM & LPT)**" option in 'Device Manager' window.

To test the USB interface open Hyper Terminal by selecting the COM port specified by the system. The COM port number assigned to the USB serial device is not fixed and can change. To know the current COM port number the user needs to look into the 'Device Manager' page under "Ports(COM & LPT)". After selecting the appropriate COM PORT, press any key on keyboard; a message will be displayed in the hyper terminal window as shown below. This confirms that the USB interface on the BlueBoard is fine.

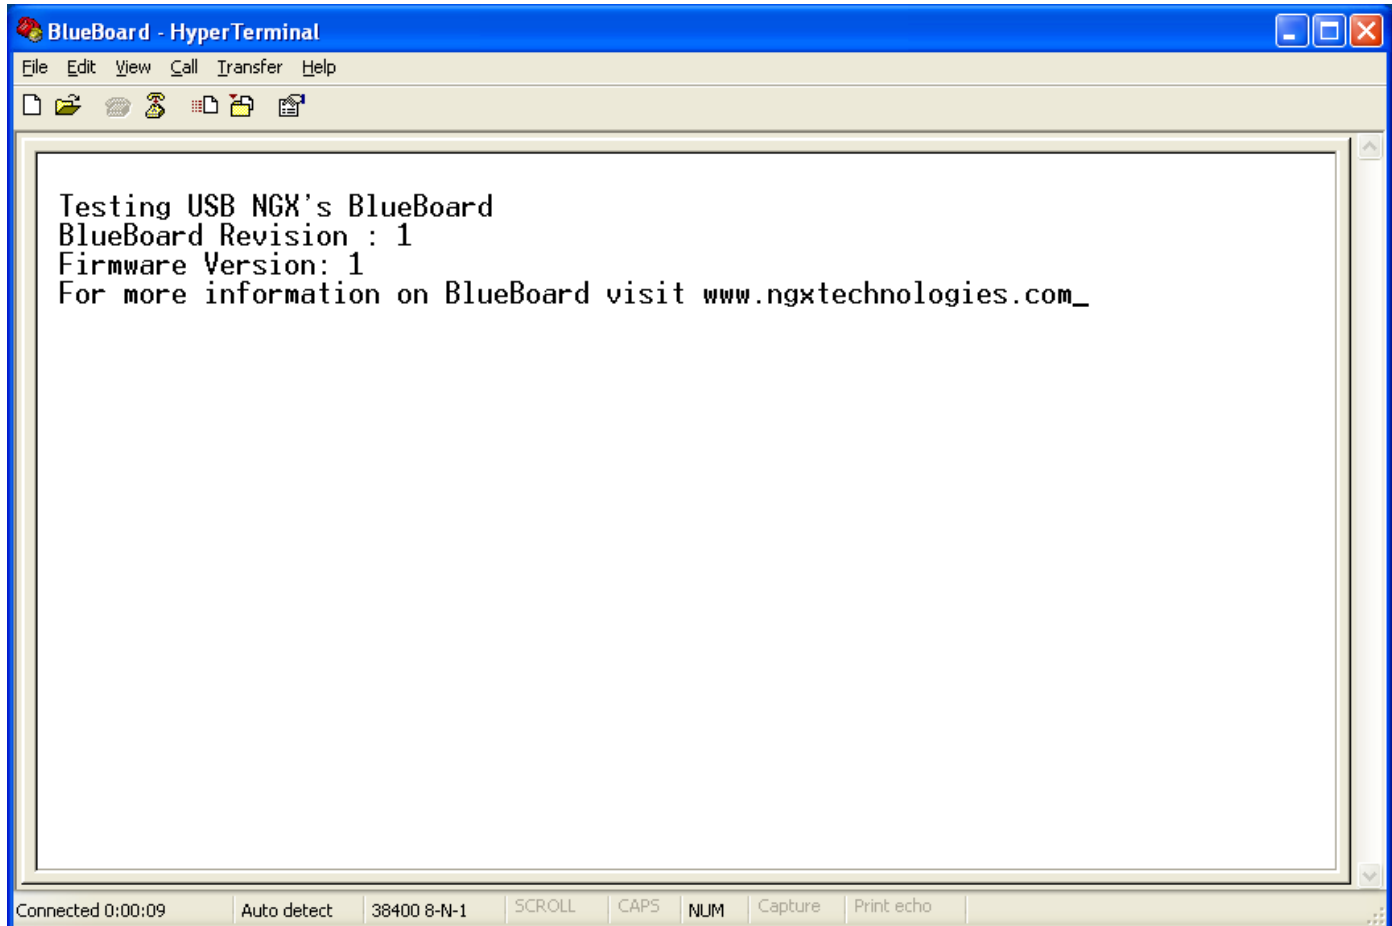

6 Schematics

A PDF version of the schematic can be downloaded from:

http://blueboard-lpc214x.googlecode.com/files/Blueboard-lpc2148_H_schematics.pdf

7 Sample applications

The source code to demonstrate the usage of the following peripherals can be found at <http://code.google.com/p/blueboard-lpc214x/source/checkout>

8 Known Issues

Nil