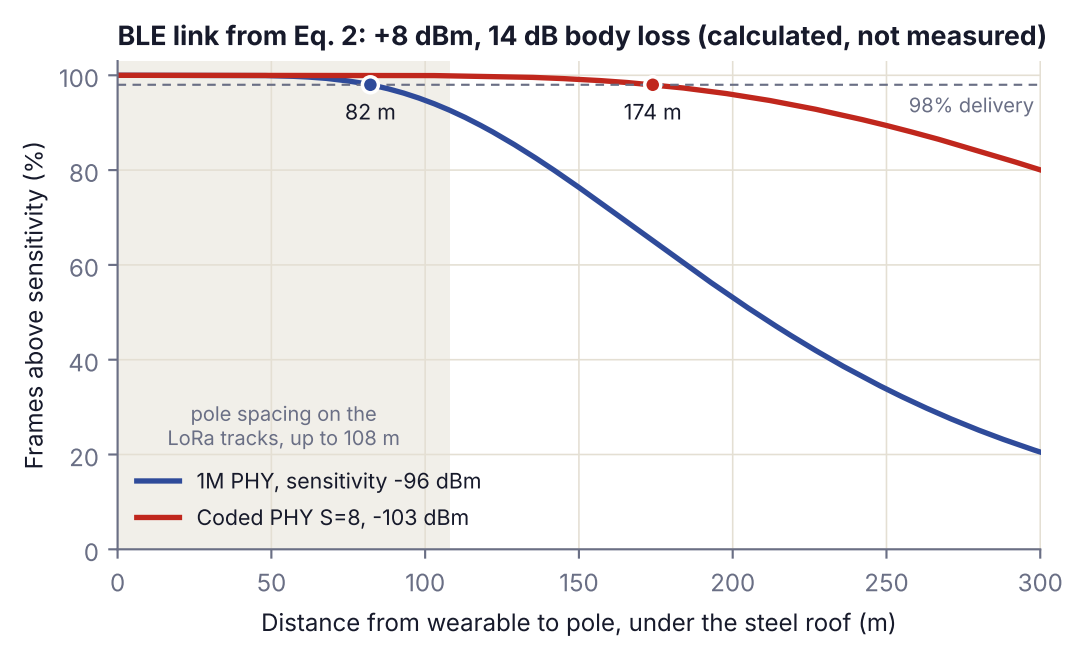
BLE link from Eq. 2: +8 dBm, 14 dB body loss (calculated, not measured)
Frames above sensitivity (%)
100
80
60
40
20
0
82 m
174 m
98% delivery
pole spacing on the
LoRa tracks, up to 108 m
1M PHY, sensitivity -96 dBm
Coded PHY S=8, -103 dBm
0
50
100
150
200
250
300
Distance from wearable to pole, under the steel roof (m)