



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

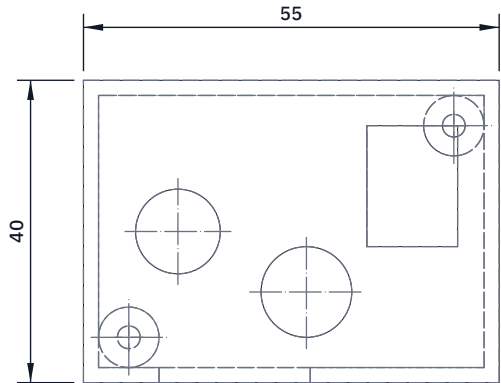


TOP VIEW

Scale 1:1; looking down (along -Z)

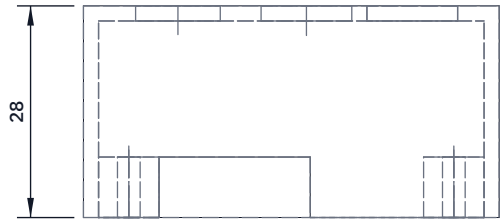


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

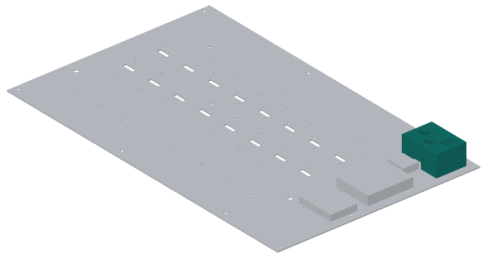

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print an open-bottomed box 55 x 40 x 28 mm, 2 mm walls, top up.
Top face: DC jack hole 11.2 mm; fuse holder hole 12 mm;
rocker switch cut-out 12 x 16 mm (check each against its datasheet).
Wire exit notch 20 x 8 mm at the bottom of the front wall.
Two screw bosses inside, 6 mm in from opposite corners, 3 mm pilot
holes for M3 screws from under the plate.
Fit: jack, fuse holder and switch go in from the top, nuts inside.
The adapter lead comes over the tray's right rim into the jack.
Check: each part snaps or screws in square; nothing rocks.

CELLCHECK

github.com/BoujeeEnjinia1701/cellcheck

CellCheck inlet housing: making sketch

DRAWING NO. CCK-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 2 mm walls					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand