

CROSSSAFE · DESIGN PRECIS

CrossSafe design precis

Design Molecule Lab · designmolecule.com

DOCUMENT CONTROL

Document ID	CRS-PRC-001	Version	0.8
Status	Draft	Date	2026-10-02
Author	Amish Chadha	License	CERN-OHL-S-2.0
Project TRL	TRL 3 Proof of concept		
Repository	github.com/BoujeeEnjinia1701/crosssafe		
Source	docs/02-concept.md @ uncommitted		

REVISION HISTORY

Version	Date	Author	Change
0.8	2026-10-02	Amish Chadha	Bezels and visors on the LED heads; pole range 76 to 114.3 mm; cost \$364.00 per assembly
0.7	2026-10-02	Amish Chadha	Decisions of 2026-10-02: existing-pole kit limited to 76 mm and up until a slip-torque test; panel socket for free-topped 114 mm poles; first pilot partner candidate
0.6	2026-10-01	Amish Chadha	Budget treated as a value-engineering target
0.5	2026-09-30	Amish Chadha	Constructable design (CRS-DDR-003) with keyed saddles and bands for every part on the pole, mounting plate, radar arm, panel bracket and rails; numbers from CRS-CAL-001 v0.3
0.4	2026-09-25	Amish Chadha	Recommendations accepted by Amish (DDR-002)
0.3	2026-09-25	Amish Chadha	TRL 3 update; design choices adopted for TRL 3 work (CRS-DDR-001), PIR gating, pilot light, 114.3 mm post,

			numbers from CRS-CAL-001, model and drawing CRS-DWG-001
0.2	2026-09-25	Amish Chadha	TRL 2 concept (how it works, components, first-order numbers, safety, open questions)
0.1	2026-09-25	Amish Chadha	Initial scaffold

CrossSafe design precis

■ Summary


CrossSafe is a pair of pole-mounted, solar-powered warning beacons, one on each side of an unsignalized crossing. When a pedestrian presses the button or a small radar sensor sees someone waiting at the kerb, both assemblies flash two amber lights per face under the crossing warning sign for about 13 s, and a small pilot light confirms to the pedestrian that the warning is on. Each assembly runs from a 20 W panel and a 12.8 V 12 Ah LiFePO4 battery, a low-power PIR sensor switches the radar on only when something moves nearby, and the two sides stay in step over a short LoRa link, so no trench or cable across the road is needed. The TRL 3 calculations (CRS-CAL-001) give 16.0 Wh/day of use at 300 activations, 7.7 days without sun, and \$360.00 in parts for one assembly on an existing pole, \$10.00 over its budget after the parts that make the design buildable (CRS-DDR-003). A ventilated sun shield keeps the battery below its discharge limit, and an anti-rotation bolt (new posts) or keyed saddles (existing poles) stop the sign turning in a storm; only poles under about 70 mm remain at risk.

The concept follows the rectangular rapid flashing beacon (RRFB), which FHWA lists as a proven safety countermeasure ([FHWA](#)), and uses the US Interim Approval IA-21 as its reference for light size, flash pattern, night dimming and the optional pilot light ([FHWA IA-21](#)). It is an open reference design, not a certified traffic control device.

CrossSafe

github.com/BoujeeEnjinia1701/crosssafe

CONCEPT, NOT FOR FABRICATION

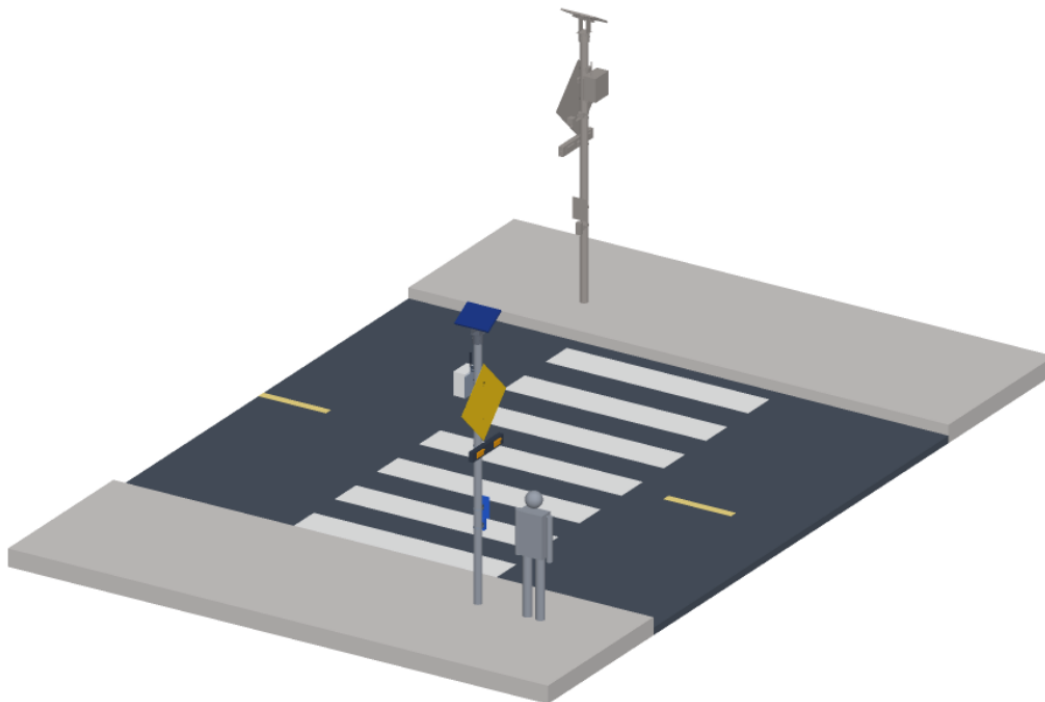

Seen from the front right and above, 24 deg elevation. Grey figure: 1.75 m person for scale

■ How it works


1. **Idle.** The controller sleeps with its radio listening, the button is armed, and a PIR sensor watches for movement near the kerb. When the PIR sees motion it switches on the radar, which watches a waiting zone of about 1.5 x 2 m; the radar goes off again when nothing has moved for a set time. Passive detection can be switched off where it is not allowed. The battery charges from the panel.
2. **Trigger.** A button press, or a person detected in the waiting zone for 1 s or more, wakes the controller.
3. **Synchronize.** The controller sends a short LoRa packet to the far-side assembly (and listens for the same from it). Both start flashing within 48 ms, or 244 ms if two packets are lost (CRS-CAL-001).
4. **Warn.** Two amber heads per face flash in the IA-21 wig-wag sequence, 75 sequences per minute, for the site's set time (crossing length / 0.9 m/s + 5 s, 12.8 s for 7 m), dimmed at night. A new trigger extends the time. The pilot light on the kerb end of the light bar confirms to the pedestrian that the warning is on, and the button gives a click and a tactile pulse.
5. **Log.** The controller counts activations and records faults and battery state. It stores no images or audio; the radar reports presence only.

Figure 2 shows the daily energy flow and Figure 3 the parts. The general arrangement is drawing CRS-DWG-001 (`cad/drawings/`), generated from the parametric model `cad/src/model.py` .

CrossSafe: daily energy per assembly, Wh per day (CRS-CAL-001 estimates: 2.5 peak sun hours, 300 activations of 20 s)

github.com/BoujeeEnjinia1781/crosssafe

CONCEPT, NOT FOR FABRICATION

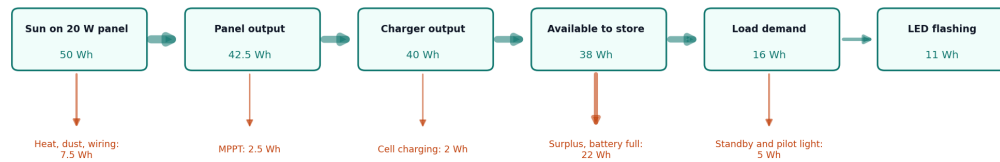


CrossSafe: exploded view (one assembly)

github.com/BoujeeEnjinia1701/crosssafe

CONCEPT, NOT FOR FABRICATION

- 1 Crossing warning sign, 750 mm
- 2 Light bar housing, double sided
- 3 Amber LED heads (4)
- 4 Push-button station
- 5 Presence radar on arm
- 6 Solar panel, 20 W
- 7 Panel bracket
- 8 Enclosure, IP65
- 9 LiFePO4 battery 12.8 V 12 Ah
- 10 MPPT charge controller
- 11 Controller and radio board
- 12 Antenna
- 13 Band clamps (8)
- 14 Post, 114.3 mm (shortened in this view)
- 15 PIR wake sensor
- 16 Pedestrian pilot light
- 17 Ventilated sun shield
- 18 Anti-rotation bolt (new post)
- 19 Keyed pole saddles (8)
- 20 Enclosure mounting plate
- 21 Radar arm
- 22 Battery strap

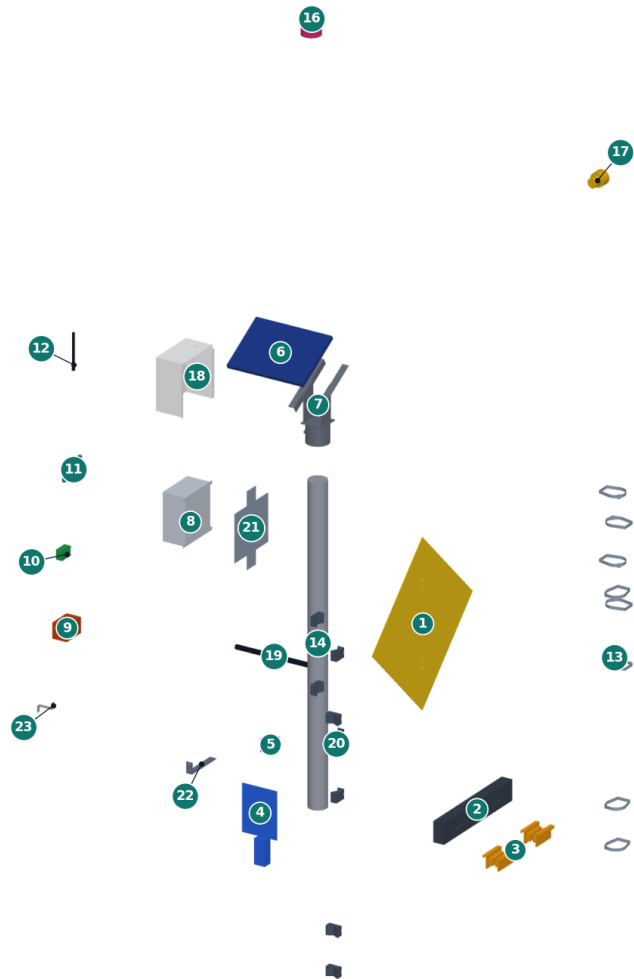

Post shortened, push button moved up, PIR (16), pilot light (17) and bolt (19, new posts only) drawn at three times size; numbers match bom/bom.csv

■ Main components


Table 1. Components of one assembly. Numbers match the exploded view and `bom/bom.csv` (line 15, wiring, glands and fixings, has no callout). Each part is made and fitted as the build plan `CRS-BLD-001` (`docs/05-build-plan.md`) shows.

No.	Component	Concept choice
1	Crossing warning sign	750 mm diamond, retroreflective, local sign design
2	Light bar housing	Folded 2 mm aluminium channel with a screwed bottom cover and riveted end caps, double sided, 720 x 130 x 70 mm, bottom at 2.1 m
3	LED heads (4)	Amber, 140 x 62 mm lens (127 x 51 mm minimum), two per face, with daylight and night levels; each has a bezel frame and a 26 mm hood visor with a drip lip, bought with the head
4	Push-button station	Vandal-resistant piezo button with acknowledgement tone and tactile arrow, instruction plate, at about 1.0 m
5	Presence radar	24 GHz presence sensor on the radar arm (22) at 2.6 m, aimed at the waiting zone, powered only when the PIR sees motion
6	Solar panel	20 W monocrystalline, about 500 x 360 mm, tilted about 30 degrees toward the equator
7	Panel bracket	Welded steel socket, cap and cheeks on the post top, with two aluminium rails and a 20 to 40 degree tilt slot
8	Enclosure	IP65 polycarbonate, 150 x 260 x 300 mm, membrane vent, internal plate, lug kit, 2.85 to 3.15 m, behind the post on its mounting plate (21)
9	Battery	LiFePO4 12.8 V 12 Ah (about 154 Wh) with internal BMS
10	Charge controller	Small MPPT controller with a LiFePO4 profile and low-temperature charge cut-off
11	Controller and radio board	FieldNode radio core (STM32WL-class LoRa module) in point-to-point mode, four LED drivers with night dimming, real-time clock, fault indicator
12	Antenna	Short whip on the enclosure roof
13	Band clamps	Eight 19 x 0.76 mm stainless bands with buckles, one at each saddle
14	Post	Existing pole first; where a new post is needed, 114.3 x 3.6 mm galvanized steel, 3.7 m above the sidewalk, 1.8 m in a 500 mm footing
16	PIR wake sensor	Low-power passive infrared sensor under the radar; switches the radar on
17	Pedestrian pilot light	Small amber light on the kerb end of the light bar, where local rules allow
18	Sun shield	Ventilated white aluminium shield over the enclosure roof and three walls, 25 mm air gap, open at the bottom
19	Anti-rotation bolt	M10 stainless bolt through the sign, the upper sign saddle and the post; new posts only
20	Keyed pole saddles	Eight identical aluminium blocks with a keyed 120 degree V, a band groove and two M8 holes; every part on the pole bolts to one; fit 76 to 114.3 mm poles (60 to 75 mm only after a slip-torque test)
21	Enclosure mounting plate	4 mm aluminium, 350 x 300 mm with saddle tabs above and below; carries the enclosure lugs and the sun shield
22	Radar arm	40 x 5 mm aluminium bar bent to an L, on its own saddle; radar on top, PIR underneath
23	Battery strap	Bent aluminium strip holding the battery on the enclosure floor

CrossSafe: cutaway of the pole-top enclosure and sun shieldgithub.com/BoujeeEnjinia1701/crosssafe

CONCEPT, NOT FOR FABRICATION

- 8 Enclosure, IP65
- 9 LiFePO4 battery 12.8 V 12 Ah
- 11 Controller and radio board
- 12 Antenna
- 13 Band clamps
- 14 Post (section of)
- 18 Ventilated sun shield
- 20 Keyed saddles
- 21 Enclosure mounting plate
- 23 Battery strap

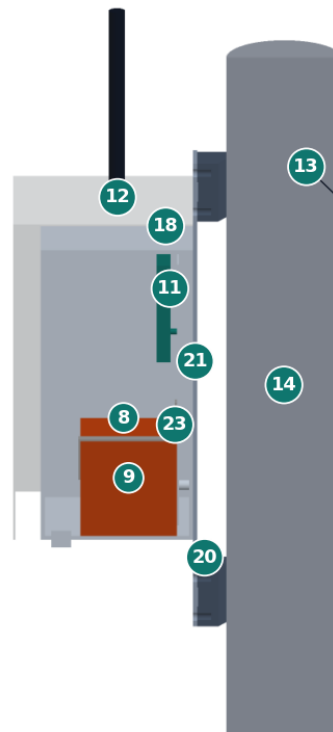

Enclosure and shield cut on the pole axis; battery low, charger and controller above, antenna through the shield roof

■ Key design choices

Each choice below was decided by Amish on 2026-09-25 by accepting the recommendations (CRS-DDR-001 and CRS-DDR-002).

- **RRFB-style amber beacons, not a signal (D4).** Amber warning lights with the standard sign ask drivers to yield; they do not claim to stop traffic, which keeps the device in a simpler approval class in most places. IA-21 is the baseline; the flash pattern is configurable for other jurisdictions.
- **Button plus passive detection, gated by a PIR (D2, D5).** The button is the reliable, accessible trigger; radar catches people who do not press it and can be switched off where passive detection is not allowed. The PIR keeps the radar off when nothing moves, which is what brings autonomy above 5 days. The radar reports presence only, which keeps images and audio off the device.
- **Radio sync instead of a cable (D6).** A LoRa point-to-point link avoids cutting the road. If the link drops, each side still flashes on its own trigger and reports a fault.
- **Own 12 V power system, FieldNode radio core (D7).** The LED load (up to about 26 W at the instant all four heads are lit) is far beyond the FieldNode power stage (6 W panel, 3.2 V cell), so CrossSafe uses a 12.8 V LiFePO4 battery with a built-in BMS. The controller reuses FieldNode's STM32WL-class radio and logging design. CellGuard, the lab's open BMS for 4 to 16 LiFePO4 cells, is a later option in place of the drop-in battery's closed BMS.

- **Existing poles first; 114.3 mm where a new post is needed (D3).** The band clamps and saddles are used only on poles of 76 to 114.3 mm until a slip-torque test confirms the keyed saddle's grip; a third saddle and band at the sign then brings 60 to 75 mm poles back (decided 2026-10-02). The prototype's panel socket fits free-topped poles of about 114 mm; a side-of-pole panel arm is designed once the pilot site's poles are known. The new-post variant meets the wind target with margin.
- **Pedestrian pilot light (D8).** IA-21 permits a small pilot light on the beacon or push button; it is included where local rules allow.
- **Sun shield on the enclosure (CRS-DDR-002).** A ventilated white shield cuts the enclosure's rise in full sun from 14.7 to 3.9 K when dusty, so the battery stays below its discharge limit and keeps charging on hot days. Placing the enclosure in the panel's shadow is to be considered when the bracket is detailed.
- **Anti-rotation detail (CRS-DDR-002).** An M10 through-bolt locks the sign and its upper saddle to a new post; on existing poles, where drilling needs the owner's consent, keyed saddles with serrated grip faces raise the clamp friction. Band tension and grip are to be measured at TRL 4, which is on hold.
- **One way of fixing everything to the pole (CRS-DDR-003).** Eight identical keyed saddles, each pulled onto the pole by a stainless band that runs across its front, carry the sign, light bar, button, instruction plate, radar arm and enclosure; each part bolts to its saddle over the band. The design is open for Amish's review.
- **Electronics high on the pole.** The enclosure bottom at 2.85 m and the panel at the top deter theft and keep cables out of reach.

■ Key numbers (CRS-CAL-001)

The TRL 2 first-order estimates have been replaced by the TRL 3 calculation note CRS-CAL-001, which states every assumption and prints every figure from `docs/04-calcs/sizing.py`. The main results:

- **Flash time.** 12.8 s for a 7 m crossing; the energy case uses 20 s, enough for crossings up to 13.5 m.
- **Energy.** Each head is lit 25 % of each IA-21 sequence, so the LEDs use 10.99 Wh/day at 300 activations. Standby is 187 mW (4.49 Wh/day) with the PIR gating the radar. The daily load is 16.0 Wh, against 38.0 Wh stored in the worst month; break-even is 1.05 peak sun hours, and the battery refills from 20 % in 2.05 days at 5 peak sun hours.
- **Autonomy.** 122.9 Wh usable gives 7.7 days without sun, 5.4 days at -20 °C and 6.2 days at end of life.
- **Heat.** Unshielded, the enclosure would run 9.6 K (clean) to 14.7 K (dusty) above ambient in full sun and a dusty box would reach 64.7 °C at 50 °C ambient. With the sun shield the rise is 3.9 K: 53.9 °C inside at 50 °C ambient, and charging continues up to 41.1 °C ambient (R8 met on paper).
- **Latency and link.** 48 ms side to side, 244 ms with two retries; about 60 dB of link margin across the road with a bus in the way.
- **Wind.** A 40 m/s gust gives 3.52 kN·m at the base. The 114.3 x 3.6 mm post reaches 105 MPa, 45 % of S235 yield; an 88.9 x 4 mm post would reach 65 %. The sign's 175 N·m of torsion is carried by the through-bolt on new posts (12 % of bearing) and by keyed saddles on existing poles of 76 mm and larger, which hold at an assumed grip friction of 0.4 (R9); smaller poles wait for a slip-torque test. A 500 mm footing needs about 1.8 m of embedment in clay (screening).
- **Cost.** Value-engineering target: \$350 per assembly on an existing pole (a hypothetical control target, not a limit). Estimated cost of the constructable design: \$364.00 per assembly (\$14.00 over the target) and \$728.00 per crossing (\$28.00 over the \$700 target); \$437.00 and \$874.00 with new posts (see `bom/bom.csv`). Cost drivers and savings worth trying are in the Value engineering section of `docs/06-design-decisions.md`. The \$750 value-engineering target for a two-sided site trial applies when a trial starts (on hold with TRL 4).

■ Safety

Safety: CrossSafe is a research prototype. A traffic control device must meet local standards and have road authority approval before use on a public road. A beacon that fails dark, flashes when no one is there, or gives pedestrians false confidence can cause harm; pedestrians must still check that drivers have stopped.

Safety: Lithium cells can overheat, vent and burn. Use LiFePO₄ with a BMS, fuse the battery output close to the terminal, charge only between 0 and 45 °C cell temperature, and shade the enclosure. Never charge a damaged or swollen battery.

Safety: Installing on a pole next to live traffic is work at height and work in the road. Use trained crews, traffic management and fall protection as local rules require, keep clear of overhead power lines, and mount only with the asset owner's permission. A post, sign or panel that falls can kill. CRS-CAL-001 is a screening check only: clamp torsion is at risk on poles under about 70 mm, and a qualified engineer must check the post, clamps, footing or host pole to the local code before installation.

Safety: Sign and panel edges are sharp and heavy; handle with gloves and a second person.

■ Open questions

- [] Pilot jurisdiction and its rules for beacon color, flash pattern, sign design and mounting height. First candidate to approach (2026-10-02): a United States city traffic engineering department with a Safe Routes to School or Vision Zero programme, in a North Texas city near the team; nothing is agreed.
- [] Measured LED head power and intensity for the chosen modules, and whether 6 W per head is enough in full sun.
- [] Radar false-trigger rate with passing pedestrians, cyclists, animals and rain.
- [] Radio range and reliability across the road with parked vehicles and buses in the path, and licence-free band rules in the pilot country.
- [] Measured enclosure temperature in full sun with the shield fitted, and whether the enclosure can sit in the panel's shadow (CRS-CAL-001, section C).
- [] Measured band tension and keyed saddle grip (a slip-torque test), which must pass before the existing-pole kit is used below 76 mm with a third saddle and band (R9; CRS-DDR-002, N1, decided 2026-10-02); host pole checks by the owner; local foundation design.
- [] Whether the pedestrian-facing confirmation light is allowed locally.