



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

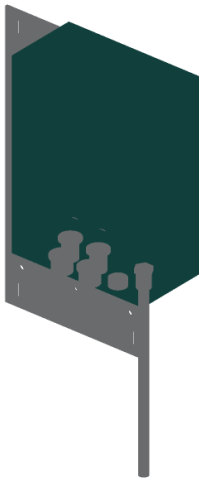

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

The FieldNode enclosure, drilled exactly as FieldNode's build plan says.

Drawn upside down: stand the box on its top, back face toward you.

Back row, 27 mm from the back face: gland 1 at 40 left, gland 2 at

8 left (16.2 mm holes), vent at 24 right (12.2 mm).

Front row, 55 mm from the back face: port A at 54 left, port B at

22 left (16.2 mm), antenna at 30 right (6.5 mm).

Left and right as seen from the front (the lid).

Tape the face, pilot drill 3 mm slowly with wood behind, open out with

a step drill. No solvents: polycarbonate crazes.

Fit the maker's four lugs at the back corners.

In CurbCount, gland 1 takes the panel lead and port A the sensor

cable; gland 2 is plugged and port B capped.

CURBCOUNT

github.com/BoujeeEnjinia1701/curbcount

CurbCount FieldNode enclosure: drilling sketch

DRAWING NO. CBC-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Bought IP65 polycarbonate box 150 x 90 x 200 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	