



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

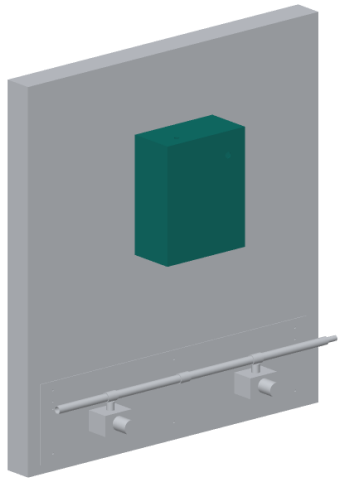

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bought box, door on the front (it faces east, away from the wall).
Take out the gear plate before drilling. Measure from the box's centre line (left and right as seen facing the door).
Bottom: four 20.5 mm holes for M20 glands, 25 mm behind the door face (clear of the battery), at 100 and 40 mm left and 40 and 100 mm right: front pod, valves, mast, back pod cables.
Top: one 16 mm hole for the siren's lead, 80 mm left of centre, 110 mm out from the back; the siren's gasket seals it.
Door: one 22 mm hole for the key switch, 90 mm right of centre and 120 mm above the middle.
Pilot drill 4 mm, open with a step drill, deburr, touch up the paint.
Fit: four lugs on the back corners; M8 screws into wall plugs.
Check: no swarf left inside; the door gasket is undamaged.

EMBERGUARD

github.com/BoujeeEnjinia1701/emberguard

EmberGuard ground enclosure: drilling sketch

DRAWING NO. EGD-DWG-111			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Bought steel IP65 wall box 400 x 320 x 160 mm, light-coloured					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand