



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	Programming header on the power board (FND-DEC-001)	2026-10-02	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

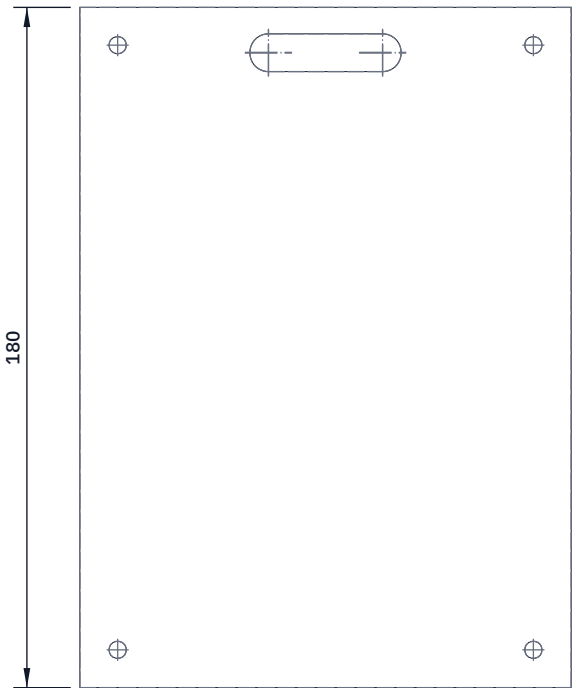


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

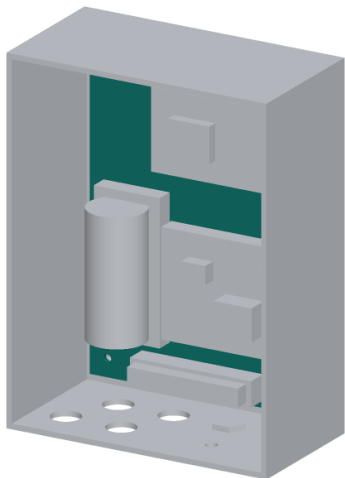

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print flat, 130 x 180 x 3 mm, in ASA in an enclosed printer.

Four 4.5 mm holes 10 mm in from each side and from top and bottom (110 x 160 mm apart), to match the enclosure's four moulded bosses.

Measure your enclosure's bosses first and move the holes to suit.

Finger slot 40 x 10 mm, 7 mm below the top edge, for lifting out.

Lay out on the front: cell holder lower left, power modules lower right (programming header at their top right, pins toward the lid), controller above, connector strip along the bottom edge.

Mark each module's holes through the module; drill 3.2 mm for M3 screws on 6 mm nylon standoffs.

Fit: four M4 screws into the bosses; the plate sits 6 mm off the back wall and 7 mm above the floor, clear of the gland nuts.

Check: flat within 0.5 mm; drops in and lifts out without force.

FIELDNODE

github.com/BoujeeEnjinia1701/fieldnode

FieldNode internal plate: making sketch

DRAWING NO. FND-DWG-107			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES ASA, 3D printed, 100 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	